

HV06 Series High Voltage Resistors




Specification Table

Type	Power Rating (W)	Maximum Working Voltage (V)	Maximum Overload Voltage (V)	Temperature Range (°C)	Ambient Temperature (°C)
HV06	0.125	400	1000	-55 to +155	70

Power Rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70°C. For temperature in excess of 70°C, the load shall be derated.

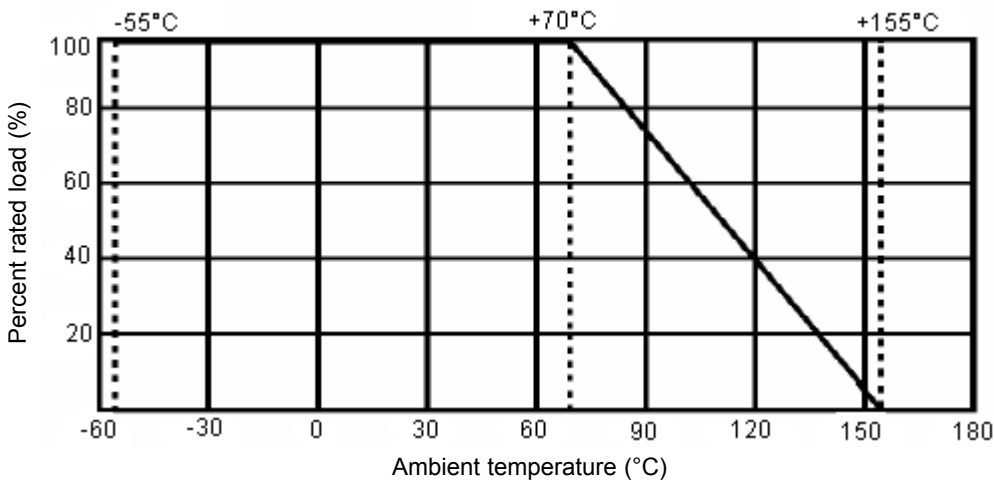

Nominal Resistance


Effective figures of nominal resistance shall be in accordance with E-24 and E-96 series for 1 % and E-24 series for 2 % and 5 %




HV06 Series High Voltage Resistors



Construction:

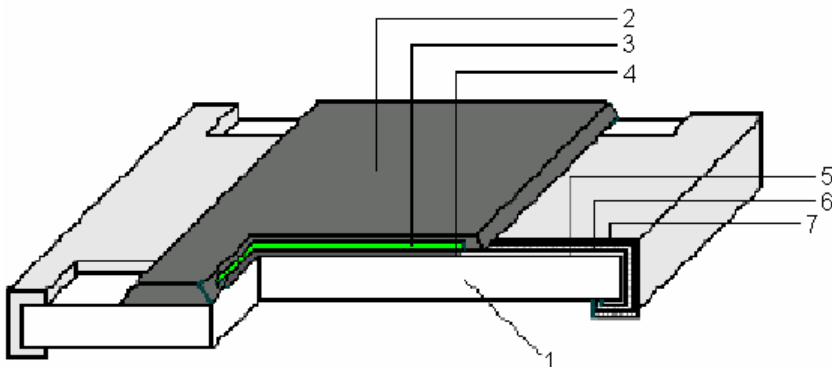

1. High purity alumina substrate.
2. Protective covering.
3. Resistive covering.
4. Termination inner (Ag/Pd).
5. Termination (between) Ni plating.
6. Termination (outer) Sn plating.

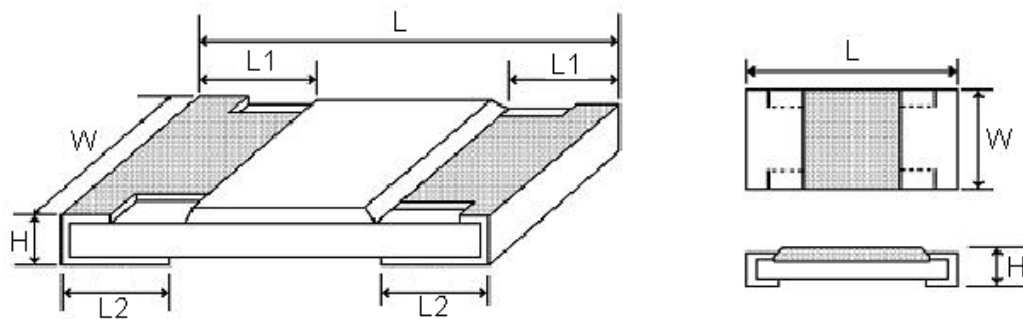

Dimensions : Millimetres

Dimensions

Type	$L \pm 0.15$	$W + 0.15$ $- 0.10$	$H \pm 0.10$	$L1 \pm 0.20$	$L2 \pm 0.20$
HV06	3.10	1.55	0.55	0.45	0.45


Dimensions : Millimetres

Power Rating

Type	Power Rating at 70°C (W)	Tolerance %	Resistance Range (Ω)	Standard Series
HV06	0.125 (1/8)	± 5	100K to 10M	E-24

Marking on the Resistors

A. $\pm 5\%$ Tolerance : the first two digits are significant figures of resistance and the third one denoted number of zeros.

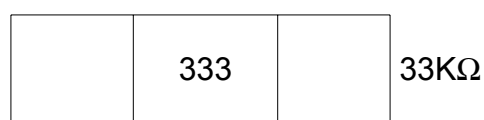

HV06 Series High Voltage Resistors



Performance specification

Characteristics	Limits	Test Methods (JIS C 5201-1)
Temperature coefficient	± 200 PPM/ $^{\circ}$ C	Natural resistance change per temperature degree centigrade $R2-R1/ R1 (t2-t1) \times 10^6$ (PPM/ $^{\circ}$ C). R1 : Resistance value at room temperature (t1) R2 : Resistance value at room temperature plus 100 $^{\circ}$ C (t2). Test pattern : Room temperature(t1), Room temperature +100 $^{\circ}$ C(t2)
Short time overload	$\Delta R \leq \pm(2.0\%+0.1\Omega)$ maximum	Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.
Humidity (steady state)	$\Delta R \leq \pm(3.0\%+0.1\Omega)$ maximum	Temporary resistance change after 1000 hours exposure in a humidity test chamber controlled at 40 \pm 2 $^{\circ}$ C and 90 to 95% relative humidity
Terminal bending	$\pm (1.0\% + 0.05\Omega)$ maximum	Twist of Test Board : Y/X = 3/90 mm for 60 seconds
Temperature cycling	5%: $\Delta R \leq \pm(1.0\%+0.05\Omega)$ maximum	Resistance change after continuous 5 cycles for duty cycles specified below Step 1 : 30 minutes at -55 \pm 3 $^{\circ}$ C Step 2 : 10 to 15 minutes at room temperature Step 3 : 30 minutes at 155 \pm 2 $^{\circ}$ C Step 4 : 10 to 15 minutes at room temperature
Load life in humidity	$\Delta R \leq \pm(3.0\%+0.1\Omega)$ maximum	Resistance change after 1000 hours (1.5 hours "on", 0.5 hour "off") at RCWV in a humidity chamber controlled at 40 $^{\circ}$ C \pm 2 $^{\circ}$ C and 90 to 95 % relative humidity
Load life	$\Delta R \leq \pm(3.0\%+0.1\Omega)$ maximum	Permanent resistance change after 1000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at 70 $^{\circ}$ C \pm 2 $^{\circ}$ C ambient.
Solderability	95 % coverage minimum	Test temperature of solder : 245 \pm 3 $^{\circ}$ C Dipping time in solder : 2 to 3 seconds
	Go up tin rate bigger than half of end pole.	Reflow:



HV06 Series High Voltage Resistors



Resistance Preferred Value Range

E6	E12	E24	E96	E6	E12	E24	E96	E6	E12	E24	E96
10	10	10	10.0				21.5				46.4
			10.2	22	22	22	22.1	47	47	47	47.5
			10.5				22.6				48.7
			10.7				23.2				49.9
		11	11.0				23.7			51	51.1
			11.3			24	24.3				52.3
			11.5				24.9				53.6
			11.8				25.5				54.9
	12	12	12.1				26.1		56	56	56.2
			12.4				27.7				57.6
			12.7			27	27.4				59.0
		13	13.0				28.0				60.4
			13.3				28.7			62	61.9
			13.7				29.4				63.4
			14.0			30	30.1				64.9
			14.3				30.9				66.5
			14.7				31.6		68	68	68.1
15	15	15	15.0				32.4				69.8
			15.4	33	33	33	33.2				71.5
			15.8				34.0				73.2
		16	16.2				34.8			75	75.0
			16.5				35.7				76.8
			16.9			36	36.5				78.7
			17.4				37.4				80.6
			17.8				38.3		82	82	82.5
	18	18	18.2		39	39	39.2				84.5
			18.7				40.2				86.6
			19.1				41.2				88.7
			19.6				42.2			91	90.9
		20	20.0			43	43.2				93.1
			20.5				44.2				95.3
			21.0				45.3				97.6


Above values in accordance with IEC Publication 63 (1963) and BS2488



HV06 Series High Voltage Resistors



Part Number Explanation:

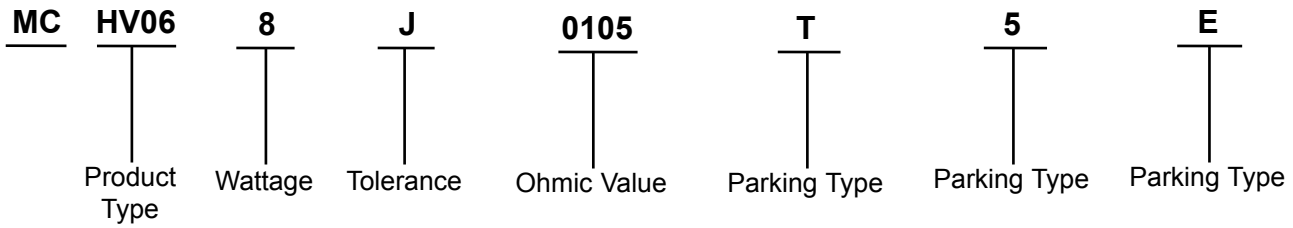

- Product Type** : HV06 = Type.
- Wattage** : W8 = 1/8W.
- Tolerance** : J = ±5%.
- Ohmic Value** : Where R = Ohms = Ω.
 K = Kiloohms = KΩ.
 M = Megaohms = MΩ.
 And replaces the decimal point.
 eg: 1R5 = 1.5Ω.
 4K7 = 4.7KΩ.
 6M8 = 6.8MΩ.
- Parking Type** : T = T/R Packing.
- Packing Quantity** : 5 = 5000 pieces.
- Special** : E = Lead Free.

Stocked Values

Tolerance	Wattage (W)	Preferred Value Range	Range Value
1%	0.063	E96	1R5 - 1M
1%	0.1	E24	1R5 - 1M
1%	0.125	E24	10R - 1M



HV06 Series High Voltage Resistors



Notes:

International Sales Offices:

	AUSTRALIA – Farnell Tel No: ++61 1300 361 005 Fax No: ++61 1300 361 225		FINLAND – Farnell Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		ITALY – Farnell Tel No: ++ 39 02 93 995 200 Fax No: ++ 39 02 93 995 300		SPAIN – Farnell Tel No: 901 20 20 80 Fax No: 901 20 20 90
	AUSTRIA – Farnell Tel No: ++ 43 662 2180 680 Fax No: ++ 43 662 2180 670		FRANCE – Farnell Tel No: ++ 33 474 68 99 99 Fax No: ++ 33 474 68 99 90		MALAYSIA – Farnell-Newark Tel No: ++ 60 3 7873 8000 Fax No: ++ 60 3 7873 7000		SWEDEN – Farnell Tel No: ++ 46 8 730 50 00 Fax No: ++ 46 8 83 52 62
	BELGIUM – Farnell Tel No: ++ 32 3 475 2810 Fax No: ++ 32 3 227 3648		GERMANY – Farnell Tel No: ++ 49 89 61 39 39 39 Fax No: ++ 49 89 613 59 01		NETHERLANDS – Farnell Tel No: ++ 31 30 241 7373 Fax No: ++ 31 30 241 7333		SWITZERLAND – Farnell Tel No: ++ 44 204 64 64 Fax No: ++ 44 204 64 54
	BRAZIL – Farnell-Newark Tel No: ++ 55 11 4066 9400 Fax No: ++ 55 11 4066 9410		HONG KONG – Farnell-Newark Tel No: ++ 852 2268 9888 Fax No: ++ 852 2268 9899		NEW ZEALAND – Farnell Tel No: 0800 90 80 80 Fax No: 0800 90 80 81		UK – Farnell Tel No: ++ 44 8701 200 200 Fax No: ++ 44 8701 200 201
	CHINA – Farnell-Newark Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022		HUNGARY – Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		NORWAY – Farnell Tel No: 800 146 70 Fax No: 800 146 76		UK – CPC ++ 44 8701 202 530 ++ 44 8701 202 531
	CZECH REPUBLIC – Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		INDIA – Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		PORTUGAL – Farnell Tel No: ++ 34 93 475 8804 Fax No: ++ 34 93 474 5288		USA – Newark Tel No: 800 463 9275
	DENMARK – Farnell Tel No: ++ 45 44 53 66 44 Fax No: ++ 45 44 53 66 06		IRELAND – Farnell Tel No: ++ 353 1 830 9277 Fax No: ++ 353 1 830 9016		RUSSIA – Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209	 EXPORT – Farnell Tel No: ++ 44 8701 200 208 Fax No: ++ 44 8701 200 209 For enquiries from all other markets	
	ESTONIA – Farnell Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		ISRAEL – Farnell Tel No: ++ 180 937 0015 Fax No: ++ 180 937 0014		SINGAPORE – Farnell-Newark Tel No: ++ 65 6788 0200 Fax No: ++ 65 6788 0300		

<http://www.farnell.com>
<http://www.newark.com>
<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.