


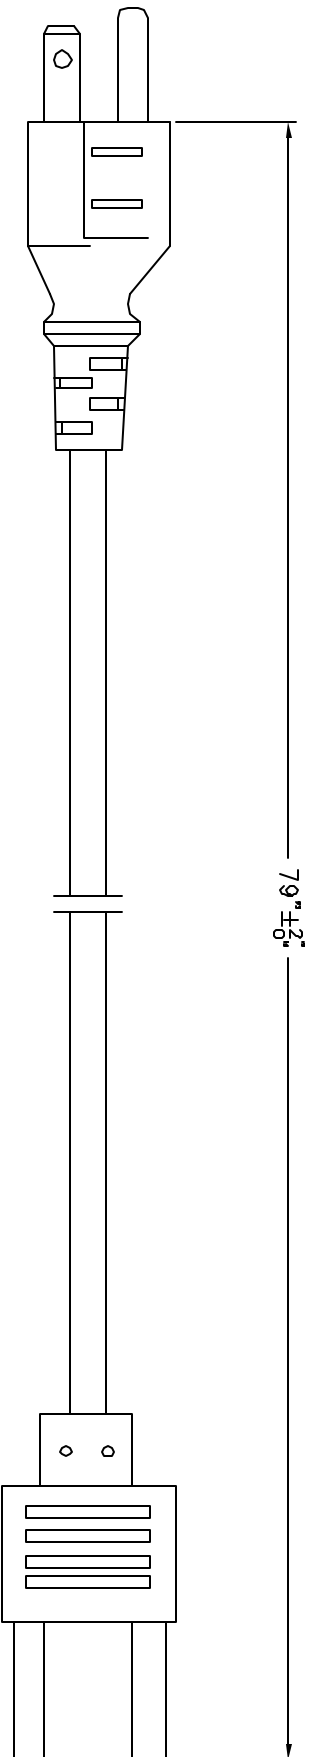


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F008.DWG

REVISONS		DOC. NO.	DATE	CHECKED	DATE	APPROVED	DATE
DWG #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPROVED
2011	A	Released	JLN	12/19/08	JVM	12/19/08	JVM

DOC. NO. SPC-F008 \* Effective 7/8/02 \* DGP No. 1398



- NOTES:**
1. CORDAGE: SJT, 18AWG / 3C, SHIELDED-MYLAR FOIL, CEE COLOR CODE, TEMP. RATING 60°C, RATING: 125V 10A, JACKET COLOR: BLACK
  2. PLUG: NEMA 5-15P
  3. CONNECTOR: IEC 60320 C13
  4. APPROVALS: UL, CSA

**DISCLAIMER:**

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TOLERANCES:**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	12/19/08
CHECKED BY:	DATE:
Jeff McVicker	12/19/08
APPROVED BY:	DATE:
Jeff McVicker	12/19/08

DRAWING TITLE:		DRAWING NO.		SCALE:		SHEET:	
Power Cord		SPC13298		NTS		1 OF 1	
SIZE		ELECTRONIC FILE		U.O.M.: INCHES [mm]		REV	
A		11J3570.dwg				A	