BNC Plug





Specifications:

: BNC Coaxial Connector Type Body Style : Straight Plug **Coaxial Termination** : Crimp Impedance : 50Ω Coaxial Cable Types : RG-58 **Contact Material** : Brass **Contact Plating** : Gold Frequency Max : 11GHz Connector Mounting : Cable Approval Bodies : MIL Spec **Body Plating** : Nickel Cable Diameter Max : 5mm

Contact Resistance : $1.5m\Omega$ DC Current Max : 1AInsulator Material : PTFE
Material : Brass

Operating Temperature : -65°C to +165°C


Proof Voltage : 2kV VSWR : 1.35 Working Voltage : 500V

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




BNC Plug



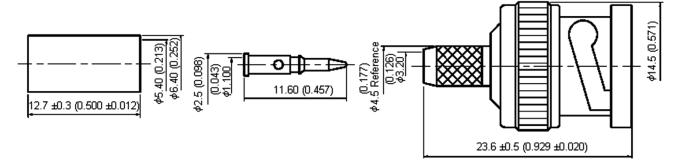

Number	Description	Material	Finish
1	Body	Brass	Nickel 100µ" Min.
2	Washer		
3	Spring Washer	SK-5	
4	Washer	Brass	
5	Gasket	Rubber	None
6	Insulation	PTFE	
7	Shell	Zinc	Nickel 100µ" Min.
8	Crimp Ferrule	Brass	
9	Centre Contact		Gold



Stripping Dimension

Dimensions: Millimetres (Inches)

Part Number Table

Description	Part Number	
Plug, BNC, 50R, PK100	MP-13-10F-1 58 TGN/Z	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

