


# Fast-Acting SMD Fuses

## 11.3mm × 4mm

**multicomp** PRO

**RoHS  
Compliant**



### Specifications

Main Characteristics	: Brick fuse; Fast-Acting (F)
Standard	: UL-248-14
Body Material	: Ceramic
End Caps Material	: Copper plated with silver
Operating Temperature	: -55°C to +125°C
Stock Temperature	: +10°C to +60°C
	Relative humidity: ≤75% yearly average Without dew, maximum 30 days at 95%
Vibration Resistance	: 24 cycles at 15 min. each (60068-6) 10-60Hz at 0.75mm amplitude 60-2000Hz at 10g acceleration
Soldering Parameters	: 260°C. ≤10 sec (Wave Soldering) 300°C. ≤2 sec (Hand Soldering) Soldering Peak: 260°C. 10 sec. 280°C. 5 sec. (IEC 60068-20)

### Electrical Characteristics at 25°C


Part Number	Rated Current (A)	Max. Voltage	Max. Voltage Drop (mV)	Breaking Capacity	Typical Melting I <sup>2</sup> T (A <sup>2</sup> s)	Cold Resistance (mΩ)
MP006276	1	250V AC 400V DC	300	150A@125V AC 150A@250V AC 150A@125V DC	0.47	147.8
MP006277	2		150	150A@250V DC 100A@350V DC 100A@400V DC	1.84	52.4

Note: 1. Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)  
2. The current values used for calculating I<sup>2</sup>T should be within the standard range of 10ms.

### Time Vs Current Characteristic

Rated Current	100%	200%
1A to 2A	>4H	<60s

### Diagram

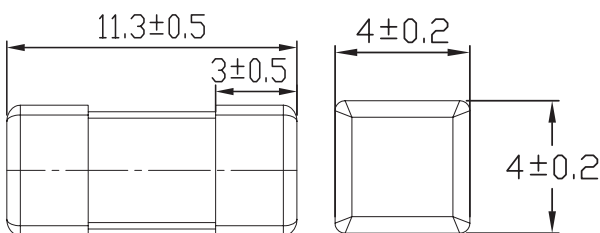

Dimensions : Millimetres

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro


**multicomp** PRO

# Fast-Acting SMD Fuses

## 11.3mm × 4mm

**multicomp** PRO

### Average Time Current (I-T Curve)

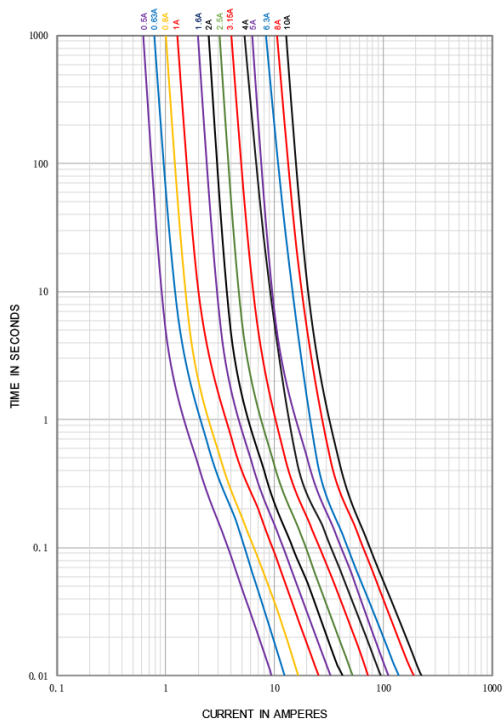

### Part Number Table

Description	Part Number
SMD Fuse, Fast-Acting, 1A, 250V AC / 400V DC, 11.3mm × 4mm	MP006276
SMD Fuse, Fast-Acting, 2A, 250V AC / 400V DC, 11.3mm × 4mm	MP006277

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO