

- Features:
- WWS offers miniature size at higher power rating
 - High performance for low cost
 - High power to size ratio
 - MWW – completely molded construction with welded terminations
 - Complete welded terminations
 - Tinned copper leads
 - Available in non-inductive styles
 - High temperature silicone coating
 - RoHS compliant
 - Higher operating temperatures may be available. Contact factory.




Electrical Specifications							
Type / Code	MIL-R-26 Ref.	Dielectric Strength (V)	Power Rating (Watts) @ 25°C	Resistance Temperature Coefficient	Ohmic Range(Ω) and Tolerance(1)		
					0.1%, 0.5%, 1% & 5%		
					Standard	Non-Inductive	
(N)WWH	-	500V	0.4W	< 1Ω = ±90ppm/°C	0.1 - 2K	0.1 - 1K	
(N)WW1 / (N)WWS2	-	500V	1W		0.1 - 3K	0.1 - 1.5K	
(N)WW1A	RW-70	500V	1W		0.1 - 7K	0.1 - 3.5K	
(N)WW2 / (N)WWS3	RW-69	1,000V	1.5W		0.1 - 10K	0.1 - 5K	
(N)WW2A	-	1,000V	2.5W		0.1 - 15K	0.1 - 7.5K	
(N)WW3 / (N)WWS4	RW-79	1,000V	3W	1Ω to 10Ω = ±50ppm/°C	0.1 - 22K	0.1 - 11K	
(N)WW3A	-	1,000V	3W		0.1 - 30K	0.1 - 15K	
(N)WW4 / (N)WWS5	-	1,000V	4W		0.1 - 40K	0.1 - 20K	
(N)WW5 / (N)WWS7	RW-67, RW-74	1,000V	5W		0.1 - 50K	0.1 - 25K	
(N)WW7	-	1,000V	6.5W		0.1 - 70K	0.1 - 35K	
(N)WW7B / (N)WWS10	-	1,000V	7W		0.1 - 100K	0.1 - 50K	
(N)WW10	RW-78	1,000V	10W		0.1 - 150K	0.1 - 75K	
(N)MWW1	RW-70	1,000V	1W		>10Ω = ±20ppm/°C	0.1 - 2K	-
(N)MWW3	RW-79	1,000V	3W			0.1 - 20K	-
(N)MWW5	RW-67, RW-74	1,000V	5W			0.1 - 40K	-
(N)MWW10	RW-68, RW-74	1,000V	10W	0.1 - 150K		-	


(1) Lesser of √PR or maximum working voltage

Please refer to the High Power Resistor Application Note (page 4) for more information on designing and implementing high power resistor types.

Power Derating Curve:

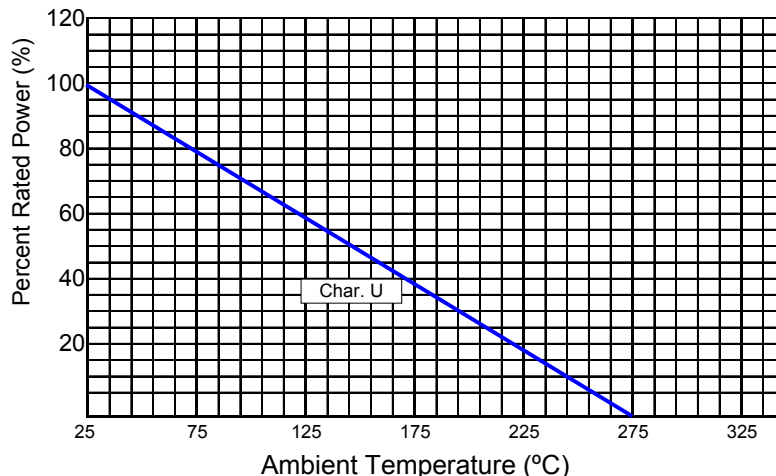

Characteristic "U" -55°C to +275°C

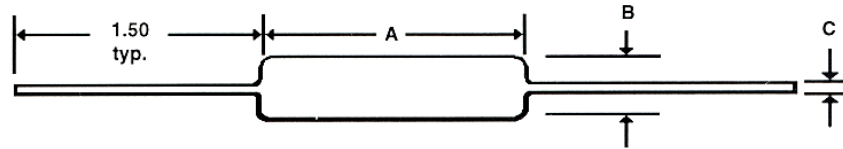

Mechanical Specifications				
Type / Code	A	B	C	Units
(N)WWH	0.312 ± 0.062 7.9 ± 1.6	0.11 ± 0.031 2.8 ± 0.8	0.025 ± 0.002 0.64 ± 0.05	inches mm
(N)WW1 / (N)WWS2	0.375 ± 0.062 9.5 ± 1.6	0.11 ± 0.031 2.8 ± 0.8	0.025 ± 0.002 0.64 ± 0.05	inches mm
(N)WW1A	0.42 ± 0.062 10.7 ± 1.6	0.11 ± 0.031 2.8 ± 0.8	0.025 ± 0.002 0.64 ± 0.05	inches mm
(N)WW2 / (N)WWS3	0.37 ± 0.062 9.4 ± 1.6	0.156 ± 0.031 4 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)WW2A	0.55 ± 0.062 14 ± 1.6	0.156 ± 0.031 4 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)WW3 / (N)WWS4	0.56 ± 0.062 14.2 ± 1.6	0.187 ± 0.031 4.8 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)WW3A	0.5 ± 0.062 12.7 ± 1.6	0.218 ± 0.031 5.5 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)WW4 / (N)WWS5	0.7 ± 0.062 17.8 ± 1.6	0.27 ± 0.031 6.9 ± 0.8	0.036 ± 0.002 0.91 ± 0.05	inches mm
(N)WW5 / (N)WWS7	0.875 ± 0.062 22.2 ± 1.6	0.312 ± 0.031 7.9 ± 0.8	0.036 ± 0.002 0.91 ± 0.05	inches mm
(N)WW7	1 ± 0.062 25.4 ± 1.6	0.312 ± 0.031 7.9 ± 0.8	0.036 ± 0.002 0.91 ± 0.05	inches mm
(N)WW7B / (N)WWS10	1.2 ± 0.062 30.5 ± 1.6	0.312 ± 0.031 7.9 ± 0.8	0.036 ± 0.002 0.91 ± 0.05	inches mm
(N)WW10	1.78 ± 0.062 45.2 ± 1.6	0.375 ± 0.031 9.5 ± 0.8	0.036 ± 0.002(1) 0.91 ± 0.05(1)	inches mm
(N)MWW1	0.385 ± 0.062 9.8 ± 1.6	0.135 ± 0.031 3.4 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)MWW3	0.56 ± 0.062 14.2 ± 1.6	0.205 ± 0.031 5.2 ± 0.8	0.032 ± 0.002 0.81 ± 0.05	inches mm
(N)MWW5	0.925 ± 0.062 23.5 ± 1.6	0.33 ± 0.031 8.4 ± 0.8	0.036 ± 0.002 0.91 ± 0.05	inches mm
(N)MWW10	1.965 ± 0.062 49.9 ± 1.6	0.48 ± 0.031 12.2 ± 0.8	0.04 ± 0.002 1.02 ± 0.05	inches mm

(1) Available in 0.04mm / 0.0016"

Performance Characteristics	
Test	Results
Moisture Resistance	1% max
Load Life	1%
Temperature Cycling	0.5%
Short Time Overload	1%

How to Order

SEI Type		Code		Nominal Resistance	Tolerance	Packaging			
WW		1		10K	1%	R			
Type	Description	Code			Tolerance	Types	Qty	Description	Code
WW	Standard	1	4		0.1%	(N)WWH, (N)WW1, (N)WWS2, (N)WW1A, (N)MWW1	2,500	11" reel tape	R
WWS	Mini	1A	5		0.5%	(N)WW2, (N)WWS3, (N)WW2A, (N)WW3, (N)WWS4, (N)WW4, (N)WWS5, (N)MWW3	2,000		
MWW	Molded	2	7		1%	(N)WW3A	5,000		
NWW	Non-Inductive	2A	7B		5%	(N)WW5, (N)WWS7, (N)WW7, (N)WW7B, (N)WWS10, (N)MWW5	500		
NWWS	Mini Non-Inductive	3	10			(N)WW10, (N)MWW10	250		
NWWS	Mini Non-Inductive	3A	H						

New part number format starting January 3rd, 2011:

How to Order

1	2	3	4	5	6	7	8	9
W	W	1	F	T	1	K	0	0

Product Series	Series	Code	Power Rating @ 25°C	Tolerance		Code	Description	Size	Quantity	Resistance Value
WW	Standard			Code	Tol					Four characters with the multiplier used as the decimal holder.
WWS	Mini	H	0.6W	B	0.1%	T	11" reel tape	(N)WWH, (N)WW1, (N)WWS2, (N)WW1A, (N)MWW1	2,500	
MWW	Molded	1	1.2W	D	0.5%			(N)WW2, (N)WWS3, (N)WW2A, (N)WW3, (N)WWS4, (N)WW4, (N)WWS5, (N)MWW3	2,000	0.1 ohm = R100 2 Kohm = 2K00
NWW	Non-Inductive	1A	1.5W	F	1%			(N)WW3A	5,000	
NWWS	Mini Non-Inductive	2	2.5W	J	5%			(N)WW5, (N)WWS7, (N)WW7, (N)WW7B, (N)WWS10, (N)MWW5	500	
	WW	2A	3W					(N)WW10, (N)MWW10	250	
	NWW	3	3.7W							
		3A	4W							
		4	5W							
		5	6W							
		7	8.5W							
		7B	9W							
		10	13W							
	WWS	2	1.2W							
	NWWS	3	2.5W							
		4	3.7W							
		5	5W							
		7	6W							
		10	9W							
	MWW	1	1.5W							
		3	3.75W							
		5	6.5W							
		10	13W							

High Power Chip Resistors and Thermal Management

Stackpole has developed several surface mount resistor series in addition to our current sense resistors, which have had higher power ratings than standard resistor chips. This has caused some uncertainty and even confusion by users as to how to reliably use these resistors at the higher power ratings in their designs.


The data sheets for the RHC, RMCP, RNCP, CSR, CSRN, CSRF, CSS, and CSSH state that the rated power assumes an ambient temperature of no more than 100 degrees C for the CSS / CSSH series and 70 degrees C for all other high power resistor series. In addition, IPC and UL best practices dictate that the combined temperature on any resistor due to power dissipated and ambient air shall be no more than 105C. At first glance this wouldn't seem too difficult, however the graph below shows typical heat rise for the CSR 1/2 100 milliohm at full rated power. The heat rise for the RMCP and RNCP would be similar. The RHC with its unique materials, design, and processes would have less heat rise and therefore would be easier to implement for any given customer.

CSR 1/2 100m Surface Temp Rise



Test equipment:

Chroma Programmable DC Power supply
YF-162 TYPE-K thermometer

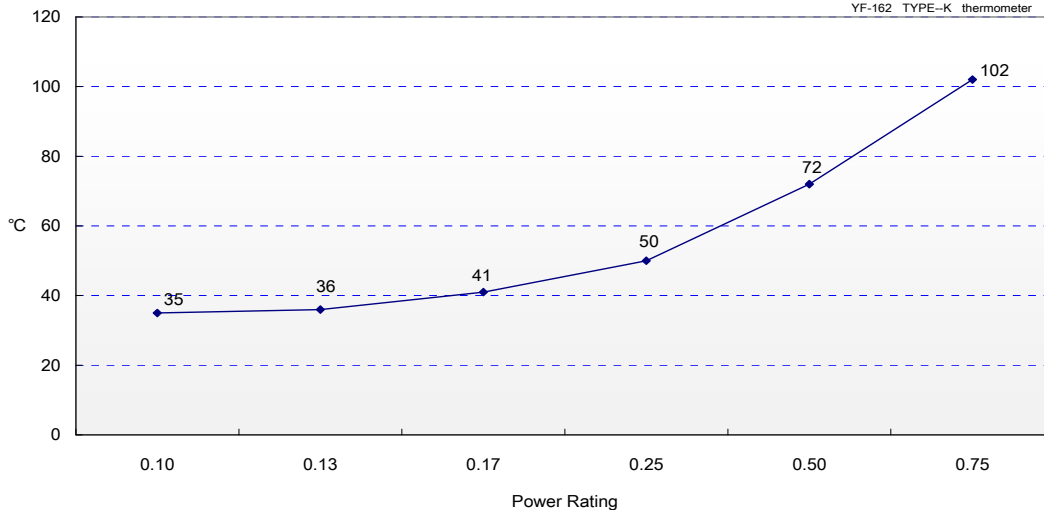

The 102 degrees C heat rise shown here would indicate there will be additional thermal reduction techniques needed to keep this part under 105C total hot spot temperature if this part is to be used at 0.75 watts of power. However, this same part at the usual power rating for this size would have a heat rise of around 72 degrees C. This additional heat rise may be dealt with using wider conductor traces, larger solder pads and land patterns under the solder mask, heavier copper in the conductors, vias through PCB, air movement, and heat sinks, among many other techniques. Because of the variety of methods customers can use to lower the effective heat rise of the circuit, resistor manufacturers simply specify power ratings with the limitations on ambient air temperature and total hot spot temperatures and leave the details of how to best accomplish this to the design engineers. Design guidelines for products in various market segments can vary widely so it would be unnecessarily constraining for a resistor manufacturer to recommend the use of any of these methods over another.

Note: The final resistance value can be affected by the board layout and assembly process, especially the size of the mounting pads and the amount of solder used. This is especially notable for resistance values ≤ 50 m Ω . This should be taken into account when designing.