


**MECHANICAL DATA**

Dimensions in mm (inches)

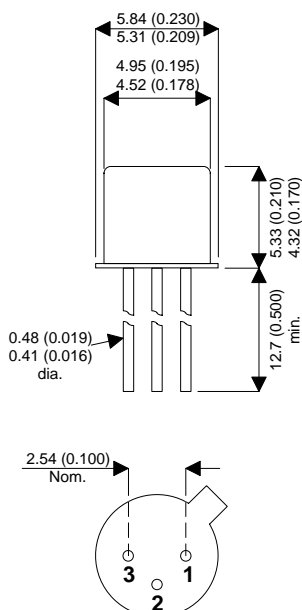

**TO-18 METAL PACKAGE**

PIN 1 – Emitter    PIN 2 – Base    PIN 3 – Collector

**GENERAL PURPOSE  
NPN TRANSISTOR  
FOR HIGH RELIABILITY  
APPLICATIONS**

**FEATURES**

- SILICON PLANAR EPITAXIAL NPN TRANSISTOR
- CECC SCREENING OPTIONS
- HIGH SPEED SATURATED SWITCHING

**ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

$V_{CBO}$	Collector – Base Voltage	60V
$V_{CEO}$	Collector – Emitter Voltage	40V
$V_{EBO}$	Emitter – Base Voltage	6V
$I_C$	Collector Current	200mA
$P_D$	Total Device Dissipation @ $T_A = 25^\circ\text{C}$	350mW
	Derate above $25^\circ\text{C}$	3.33mW / $^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance Junction – Ambient	300 $^\circ\text{C}/\text{W}$
$T_{STG}, T_J$	Operating and Storage Temperature Range	-55 to +175 $^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CEO}^*$ Collector – Emitter Breakdown Voltage	$I_C = 1\text{mA}$ $I_B = 0$	40			V
$V_{(BR)CBO}$ Collector – Base Breakdown Voltage	$I_C = 10\mu\text{A}$ $I_E = 0$	60			
$V_{(BR)EBO}$ Emitter – Base Breakdown Voltage	$I_E = 10\mu\text{A}$ $I_C = 0$	6			
$I_{BL}$ Base Cut-off Current	$V_{CE} = 30\text{V}$			50	nA
$I_{CEX}$ Collector – Emitter Cut-off Current	$V_{EB} = 3\text{V}$			50	
$V_{CE(sat)}$ Collector – Emitter Saturation Voltage	$I_C = 10\text{mA}$ $I_B = 1\text{mA}$			0.2	V
	$I_C = 50\text{mA}$ $I_B = 5\text{mA}$			0.3	
$V_{BE(sat)}^*$ Base – Emitter Saturation Voltage	$I_C = 10\text{mA}$ $I_B = 1\text{mA}$	0.65		0.85	V
	$I_C = 50\text{mA}$ $I_B = 5\text{mA}$			0.95	
$h_{FE}^*$ DC Current Gain	$V_{CE} = 1\text{V}$	$I_C = 0.1\text{mA}$	40		—
		$I_C = 1\text{mA}$	70		
		$I_C = 10\text{mA}$	100	300	
		$I_C = 50\text{mA}$	60		
		$I_C = 100\text{mA}$	30		

\* Pulse Test:  $t_p \leq 300\mu\text{s}$ ,  $\delta \leq 2\%$ .

**SMALL SIGNAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$f_t$ Current Gain Bandwidth Product	$V_{CE} = 20\text{V}$ $I_C = 10\text{mA}$ $f = 100\text{MHz}$	300			MHz
$C_{ob}$ Output Capacitance	$V_{CB} = 5\text{V}$ $I_E = 0$ $f = 1\text{MHz}$			4	pF
$C_{ib}$ Input Capacitance	$V_{BE} = 0.5\text{V}$ $I_C = 0$ $f = 1\text{MHz}$			8	pF
$h_{ie}$ Input Impedance	$V_{CE} = 10\text{V}$ $I_C = 1\text{mA}$ $f = 1\text{kHz}$	1		10	k $\Omega$
$h_{oe}$ Output Admittance		1		40	$\mu\text{hos}$
$h_{re}$ Voltage Feedback Ratio		0.5		8	$\times 10^{-4}$
$h_{fe}$ Small Signal Current Gain		100		400	—
$N_F$ Noise Figure		$V_{CE} = 5\text{V}$ $I_C = 100\mu\text{A}$ $f = 1\text{kHz}$ $R_S = 1\text{k}\Omega$			5

**SWITCHING CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_d$ Delay Time	$V_{CC} = 3\text{V}$ $V_{BE} = 0.5\text{V}$			35	ns
$t_r$ Rise Time	$I_C = 10\text{mA}$ $I_{B1} = 1\text{mA}$			35	
$t_s$ Storage Time	$V_{CC} = 3\text{V}$ $V_{BE} = 0.5\text{V}$			200	
$t_f$ Fall Time	$I_{B1} = I_{B2} = 1\text{mA}$			50	

--	--	--

## Part number search for devices beginning "2N3904-T18"

[Semelab Home](#)

Datasheets are downloaded as Acrobat PDF files.



### Bipolar Products

PRODUCT	Polarity	Package	V <sub>CEO</sub>	I <sub>C(cont)</sub>	H <sub>FE(min)</sub>	H <sub>FE(max)</sub>	@ V <sub>CE</sub> /I <sub>C</sub>	F <sub>T</sub>	P <sub>D</sub>
<a href="#">2N3904-T18</a>	NPN	TO18	40V	0.2A	100	-	10/1m	300MHz	0.31W

Searched through 3084 records and found 1 products matching your criteria.

[Top of Page](#)

If you are unable to find a suitable part, please [contact us](#).

