

Fast Recovery Rectifier

Qualified per MIL-PRF-19500/550

DESCRIPTION:

This hermetically sealed fast recovery rectifier diode series is targeted for space, commercial and military aircraft, military vehicles, shipboard markets and all high reliability applications.

✓ FEATURES / BENEFITS:

- ✓ Hermetic package
- ✓ All devices are 100% hot solder dipped
- ✓ JAN/ JANTX/ JANTXV available per MIL-PRF-19500/550

ELECTRICAL CHARACTERISTICS:

MAX. RATINGS / ELECTRICAL CHARACTERISTICS All ratings are at $T_A = 25^\circ\text{C}$ unless otherwise specified.

RATING	CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Voltage (V_R) 1N6304/R 1N6305/R 1N6306/R	-	-	-	50 100 150	V
Working Peak Reverse Voltage 1N6304/R 1N6305/R 1N6306/R		-	-	50 100 150	Volts (dc)
Average DC Output Current (I_O) ^{(1) (2)}	$T_C = +100^\circ\text{C}$	-	-	70	Amps
Peak Single Cycle Surge Current (I_{FSM})	$T_C = +55^\circ\text{C}$, $t_p = 8.3\text{ms}$	-	-	800	Amps(pk)
Reverse Recovery Time (t_{rr})		-	-	50	nsec
Forward Voltage (V_{FM})	$I_{FM} = 70\text{ A (pk)}$ duty cycle ≤ 2 percent $t_p = 300\ \mu\text{s}$ max			0.975	V (pk)
Reverse Current (I_R)	At rated V_R			25	μA dc
Junction and Storage Temp. (T_J & T_{stg})	-	-65	-	+175	$^\circ\text{C}$
Thermal Resistance ($R_{\theta JC}$)		-	-	0.8	$^\circ\text{C/W}$

(1) Derate linearly, 875 mA/ $^\circ\text{C}$ from $T_C = +100^\circ\text{C}$ to $+150^\circ\text{C}$, and 1,050 mA/ $^\circ\text{C}$ above $T_C > +150^\circ\text{C}$.

(2) Higher I_O , up to 1.2 times I_O is allowable provided that appropriate heat sinking or forced air cooling maintains the maximum junction temperature at or below $+175^\circ\text{C}$ as proven by the junction temperature rise time

SENSITRON SEMICONDUCTOR


TECHNICAL DATA
DATA SHEET 6151, REV -

1N6304/R, 1N6305/R, 1N6306/R

FAST RECOVERY DIODE

AVAILABLE AS
1N, JAN, JANTX, JANTXV

PACKAGE DIMENSIONS (inches):

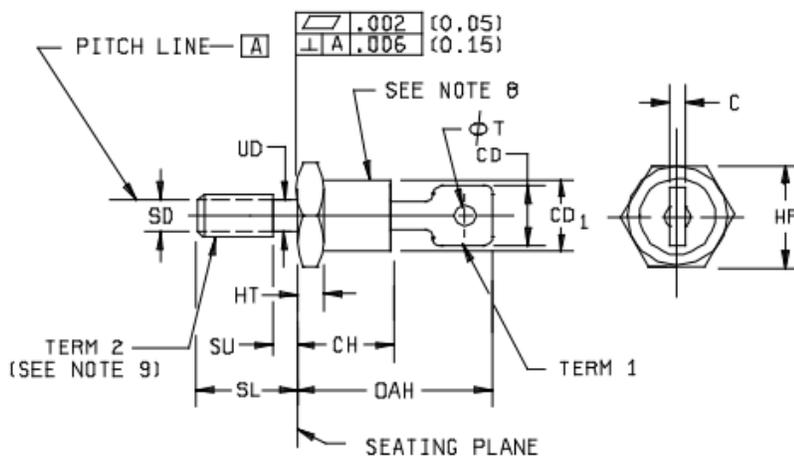

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD		.375		9.53	7
C		.080		2.03	
HF	.669	.688	16.99	17.48	
HT	.115	.200	2.92	5.08	
CH		.450		11.43	
OAH	.750	1.000	19.05	25.40	
SL	.422	.453	10.72	11.51	
SU		.090		2.29	4
CD ₁		.667		16.94	
SD					5
UD	.220	.249	5.59	6.32	
ØT	.140	.175	3.56	4.45	

NOTES:

1. Dimensions are in inches.
2. Millimeter equivalents are given for information only.
3. Units must not be damaged by torque of 30 inch-pound applied to .25-28 UNF-2B nut assembled on thread.
4. Length of incomplete or undercut threads of UD.
5. Maximum pitch diameter of plated threads shall be basic pitch diameter .2268 inch (5.761 mm).
6. A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane .60 inch (15.2 mm).
7. The angular orientation and peripheral configuration of terminal 1 is undefined.
8. Standard types shall have cathode connected to stud. Reverse types shall have anode connected to stud.
9. Term 2 threads in accordance with FED-STD-H28.
- * 10. In accordance with ASME Y14.5, diameters are equivalent to ϕx symbology.

PKG: DO-203AB (DO-5)

SENSITRON

SEMICONDUCTOR

1N6304/R, 1N6305/R, 1N6306/R

FAST RECOVERY DIODE

TECHNICAL DATA
DATA SHEET 6151, REV -

PART ORDERING INFORMATION:

The following part numbers can be screened and tested to the military screening flow. The parts are marked in accordance with the testing performed, example:

Sensitron Screening Level	*Part Number-- example for 1N6304)
1N	1N6304
JAN	JAN1N6304
JANTX	JANTX1N6304
JANTXV	JANTXV1N6304

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.