

Description


Semicoa Semiconductors offers:

- Screening and processing per MIL-PRF-19500 Appendix E
- JAN level (2N3500LJ)
- JANTX level (2N3500LJX)
- JANTXV level (2N3500LJV)
- QCI to the applicable level
- 100% die visual inspection per MIL-STD-750 method 2072 for JANTXV and JANS
- Radiation testing (total dose) upon request

Please contact Semicoa for special configurations
www.SEMICOA.com or (714) 979-1900

Applications

- General purpose
- Low power
- NPN silicon transistor

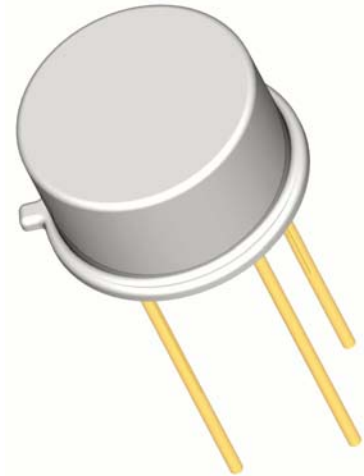

Features

- Hermetically sealed TO-5 metal can
- Also available in chip configuration
- Chip geometry 5620
- Reference document: MIL-PRF-19500/366

Benefits

- Qualification Levels: JAN, JANTX, and JANTXV
- Radiation testing available

Absolute Maximum Ratings		$T_C = 25^\circ\text{C}$ unless otherwise specified	
Parameter	Symbol	Rating	Unit
Collector-Emitter Voltage	V_{CEO}	150	Volts
Collector-Base Voltage	V_{CBO}	150	Volts
Emitter-Base Voltage	V_{EBO}	6	Volts
Collector Current, Continuous	I_C	300	mA
Power Dissipation, $T_A = 25^\circ\text{C}$ Derate linearly above 25°C	P_T	1 5.71	W mW/ $^\circ\text{C}$
Thermal Resistance	$R_{\theta JA}$	175	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	T_J	-65 to +200	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 to +200	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

characteristics specified at $T_A = 25^\circ\text{C}$

Off Characteristics						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10 \text{ mA}$	150			Volts
Collector-Base Cutoff Current	I_{CBO1}	$V_{CB} = 150 \text{ Volts}$			10	μA
	I_{CBO2}	$V_{CB} = 75 \text{ Volts}$			50	nA
	I_{CBO3}	$V_{CB} = 75 \text{ Volts}, T_A = 150^\circ\text{C}$			50	μA
Collector-Emitter Cutoff Current	I_{CEO}	$V_{CE} = 120 \text{ Volts}$			1	μA
Emitter-Base Cutoff Current	I_{EBO1}	$V_{EB} = 6 \text{ Volts}$			10	μA
	I_{EBO2}	$V_{EB} = 4 \text{ Volts}$			25	nA

On Characteristics			Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$			
Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
DC Current Gain	h_{FE1}	$I_C = 0.1 \text{ mA}, V_{CE} = 10 \text{ Volts}$	20			
	h_{FE2}	$I_C = 1.0 \text{ mA}, V_{CE} = 10 \text{ Volts}$	25			
	h_{FE3}	$I_C = 10 \text{ mA}, V_{CE} = 10 \text{ Volts}$	35			
	h_{FE4}	$I_C = 150 \text{ mA}, V_{CE} = 10 \text{ Volts}$	40		120	
	h_{FE5}	$I_C = 300 \text{ mA}, V_{CE} = 10 \text{ Volts}$	15			
	h_{FE6}	$I_C = 150 \text{ mA}, V_{CE} = 10 \text{ Volts}$	22			
	h_{FE7}	$T_A = -55^\circ\text{C}$				
Base-Emitter Saturation Voltage	V_{BEsat1}	$I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$			0.8	Volts
	V_{BEsat2}	$I_C = 150 \text{ mA}, I_B = 15 \text{ mA}$			1.2	
Collector-Emitter Saturation Voltage	V_{CEsat1}	$I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$			0.2	Volts
	V_{CEsat2}	$I_C = 150 \text{ mA}, I_B = 15 \text{ mA}$			0.4	

Dynamic Characteristics						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Magnitude – Common Emitter, Short Circuit Forward Current Transfer Ratio	$ h_{FE} $	$V_{CE} = 20 \text{ Volts}, I_C = 20 \text{ mA}, f = 100 \text{ MHz}$	1.5		8	
Small Signal Short Circuit Forward Current Transfer Ratio	h_{FE}	$V_{CE} = 10 \text{ Volts}, I_C = 10 \text{ mA}, f = 1 \text{ kHz}$	35		300	
Open Circuit Output Capacitance	C_{OBO}	$V_{CB} = 10 \text{ Volts}, I_E = 0 \text{ mA}, 100 \text{ kHz} < f < 1 \text{ MHz}$			8	pF
Open Circuit Input Capacitance	C_{IBO}	$V_{EB} = 0.5 \text{ Volts}, I_C = 0 \text{ mA}, 100 \text{ kHz} < f < 1 \text{ MHz}$			80	pF
Noise Figure	NF_1	$V_{CE} = 10 \text{ Volts}, I_C = 0.5 \text{ mA}, f = 1 \text{ kHz}, R_g = 1 \text{ k}\Omega$			16	dB
	NF_2	$V_{CE} = 10 \text{ Volts}, I_C = 0.5 \text{ mA}, f = 10 \text{ kHz}, R_g = 1 \text{ k}\Omega$			6	

Switching Characteristics						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Saturated Turn-On Time	t_{ON}	$V_{EB} = 5 \text{ Volts}, I_C = 150 \text{ mA}, I_{B1} = 15 \text{ mA}$			115	ns
Saturated Turn-Off Time	t_{OFF}	$I_C = 150 \text{ mA}, I_{B1}=I_{B2}=15 \text{ mA}$			1,150	ns