


# STM32L073Z-EVAL

#### Evaluation board with STM32L073VZ MCU

**Data brief** 

#### **Features**

- Four 5 V power supply options: power jack, ST-LINK USB connector, user USB FS connector, or daughter board
- MCU voltage selectable: 3.3 V or adjustable from 1.71 V to 3.6 V
- Micro SD card interface
- RF-EEPROM on I<sup>2</sup>C interface
- RS-232 interface configurable for communication or Flashloader
- Low-power UART
- IrDA transceiver
- USB FS connector
- Pressure sensor
- LC sensor metering
- · Joystick with 4-direction control and selector
- Reset and tamper or key button
- Touch sensing slider
- LCD glass 40 x 8 segments connected to LCD driver of STM32L073VZT6
- 2.8 inch color LCD-TFT with resistive touchscreen
- ADC & DAC signal connectors
- MCU consumption measurement circuit
- JTAG/SWD, user interface by USB virtual comport, ST-LINK/V2-1 embedded
- Extension connector for daughter board or wrapping board

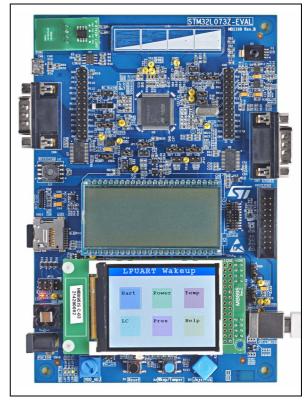

1. Picture not contractual.

Description STM32L073Z-EVAL

### 1 Description

The STM32L073Z-EVAL evaluation board has been designed as a complete demonstration and development platform for the STMicroelectronic's ARM<sup>®</sup> cortex<sup>®</sup>-M4 core-based STM32L073VZT6 microcontroller with three I<sup>2</sup>Cs, two SPIs, four USARTs, one UART, one 12-bit ADC, two 12-bit DACs, LCD driver, up to 192KB Flash memory, 20KB RAM, 6KB EEPROM, touch sensing, USB FS, LCD controller, SWD debugging support.

The full range of hardware features on the board can be used to evaluate all peripherals (USB FS, RS-232, USART, 12-bit ADC and DAC, color LCD-TFT, LCD glass, Low-power UART, IrDA, MicroSD card, touch sensing slider, pressure measurement, temperature measurement, LC sensor metering) and develop user's applications. The extension headers make it possible to easily connect a daughter board or a wrapping board specific application.

An ST-LINK/V2-1 is integrated on the board as embedded in-circuit debugger, programmer for the STM32 MCU and USB Virtual Com Port bridge.

## 2 Ordering Information

To order the evaluation board based on the STM32L073VZ MCU, use the order code: STM32L073Z-EVAL.



STM32L073Z-EVAL Revision history

# 3 Revision history

Table 1. Document revision history

Date	Revision	Changes
21-Apr-2015	1	Initial release.

#### **IMPORTANT NOTICE - PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics - All rights reserved

