

ALTOS® Double-Jacket Dielectric Cables, 12-288 Fibers, Enhanced



Features and Benefits

Two jacket layers

Provides extra protection in harsh environments

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Innovative waterblocking design

Provides efficient and craft-friendly cable preparation


Medium-density polyethylene jacket

Makes cable rugged and durable while being flexible and easy to strip


Corning ALTOS® double-jacket dielectric cables are designed for duct and aerial (lashed) installation. The double-jacket construction adds a layer of protection for harsh environments. The loose tube cable design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Standards

Design and Test Criteria	ANSI/ICEA S-87-640 Telcordia GR-20 RDUP PE-90
--------------------------	---

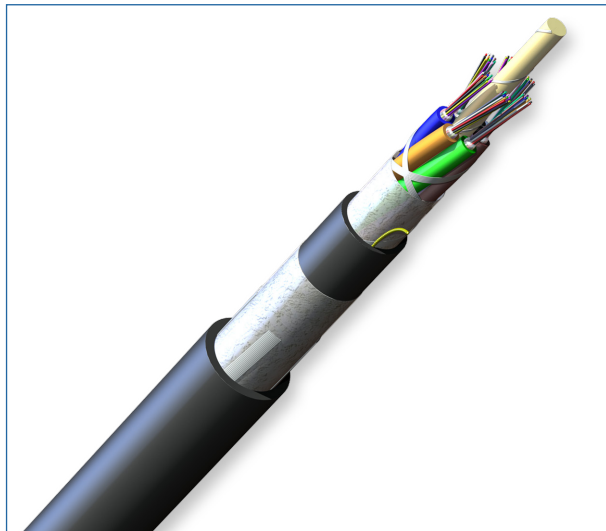


ALTOS Double-Jacket Dielectric Cables, 72 Fibers
| Photo PIM1322

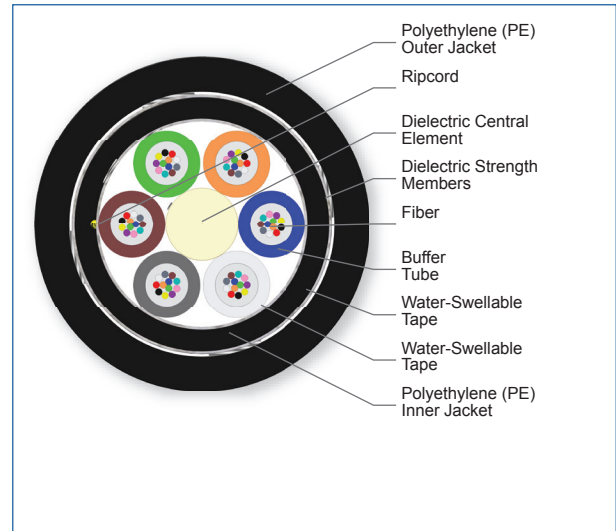


ALTOS Double-Jacket Dielectric Cables, 72 Fibers
| Photo PIM2220

ALTOS® Double-Jacket Dielectric Cables, 12-288 Fibers, Enhanced

CORNING

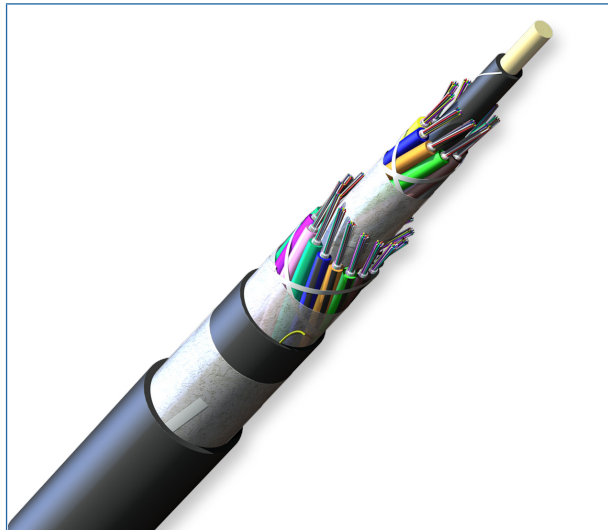

ALTOS Double-Jacket Dielectric Cables, 288 Fibers
| Photo PIM1327

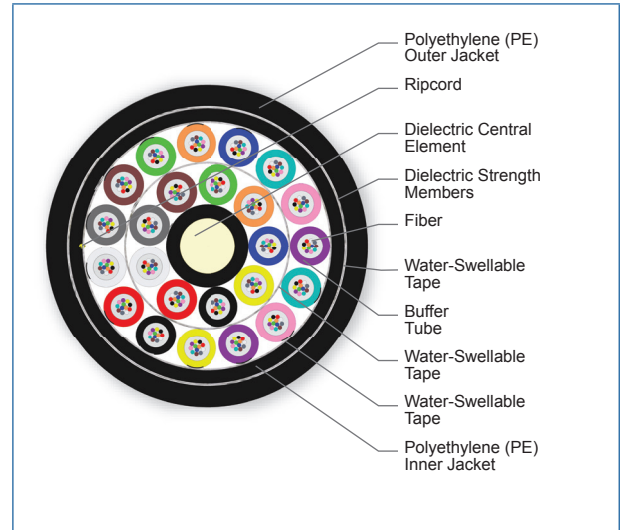

ALTOS Double-Jacket Dielectric Cables, 288 Fibers
| Photo PIM2225

Specifications

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

* Note: Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)

Mechanical Characteristics Cable

Fiber Count	Maximum Fibers per Tube	Number of Tube Positions	Number of Active Tubes	Weight	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation
12 - 72	12	6	1 - 6	114 kg/km (76 lb/1000 ft)	12.5 mm (0.49 in)	188 mm (7.4 in)	125 mm (4.9 in)
96	12	8	8	146 kg/km (98 lb/1000 ft)	14.2 mm (0.56 in)	213 mm (8.4 in)	142 mm (5.6 in)
144	12	12	12	224 kg/km (150 lb/1000 ft)	17.7 mm (0.70 in)	213 mm (8.4 in)	142 mm (5.6 in)

CORNING

ALTOS® Double-Jacket Dielectric Cables, 12-288 Fibers, Enhanced

CORNING

Mechanical Characteristics Cable

Fiber Count	Maximum Fibers per Tube	Number of Tube Positions	Number of Active Tubes	Weight	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation
192 - 216	12	18	16 - 18	217 kg/km (146 lb/1000 ft)	17.9 mm (0.70 in)	269 mm (10.6 in)	179 mm (7.0 in)
288	12	24	24	279 kg/km (187 lb/1000 ft)	20.1 mm (0.79 in)	302 mm (11.9 in)	201 mm (7.9 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Transmission Performance

Multimode				
Fiber Core Diameter (µm)	62.5	50	50	50
Fiber Category	OM1	OM2	OM3	OM4
Fiber Code	K	T	T	T
Performance Option Code	30	31	80	90
Wavelengths (nm)	850/1300	850/1300	850/1300	850/1300
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0	3.0/1.0	3.0/1.0
Serial 1 Gigabit Ethernet (m)	300/550	750/500	1000/600	1100/600
Serial 10 Gigabit Ethernet (m)	33/-	150/-	300/-	550/-
Min. Overfilled Launch (OFL) Bandwidth (MHz*km)	200/500	700/500	1500/500	3500/500
Minimum Effective Modal Bandwidth (EMB) (MHz*km)	220/-	950/-	2000/-	4700/-

CORNING

ALTOS® Double-Jacket Dielectric Cables, 12-288 Fibers, Enhanced

CORNING

Single-mode					
Fiber Name	SMF-28e+® fiber	SMF-28e+® fiber	SMF-28e+® LL	SMF-28® Ultra**	ClearCurve® XB**
Fiber Category	G.652.D	G.652.D	G.652.D	G.652.D/G.657.A1	G.652.D/G.657.A1
Fiber Code	E	E	L	Z	H
Performance Option Code	00	01	22	22	01
Wavelengths (nm)	1310/1383/1550	1310/1383/1550	1310/1383/1550	1310/1383/1550	1310/1383/1550
Maximum Attenuation (dB/km)	0.35/0.35/0.25	0.4/0.4/0.3	0.34/0.34/0.22	0.34/0.34/0.22	0.4/0.4/0.3
Typical Attenuation* (dB/km)	0.33/0.33/0.19	0.33/0.33/0.19	0.32/0.32/0.18	0.32/0.32/0.18	0.35/0.35/0.20
Fiber Name	SMF-28® ULL	LEAF®			
Fiber Category	G.652	G.655			
Fiber Code	P	F			
Performance Option Code	19	01			
Wavelengths (nm)	1310/1383/1550	1310/1383/1550			
Maximum Attenuation (dB/km)	0.33/-/0.19	-/-/0.25			
Typical Attenuation* (dB/km)	0.31/-/0.17	-/-/0.19			

* Typical attenuation values match the attenuation values listed in the optical fiber specifications. See www.corning.com/opticalfiber for Corning optical fiber specifications. Better attenuation performance options are available for some fiber and cable types. Contact Customer Care for additional fiber options.

** SMF-28® Ultra and ClearCurve® XB fiber deliver up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.

ALTOS® Double-Jacket Dielectric Cables, 12-288 Fibers, Enhanced

CORNING

Ordering Information | Note: Contact Customer Care at 1-800-743-2675 for other options.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	U	E	-	<input type="text"/>	<input type="text"/>	1	<input type="text"/>	<input type="text"/>	A	2	0
				1	2	3	4	5	6	7	8	9	10	

1 Select fiber count.

Standard offerings:
012-288 (Increments of 12)

2 Select fiber code.

K = 62.5 μm multimode (OM1)
T = 50 μm multimode (OM2/OM3/OM4)
E = Single-mode (G.652.D) SMF-28e+® fiber
L = Single-mode (G.652.D) SMF-28e+® LL fiber
Z = Single-mode (G.652.D/G.657.A1) SMF-28® Ultra fiber
H = Single-mode (G.652.D/G.657.A1) ClearCurve® XB fiber
P = Single-mode (G.652) SMF-28® ULL fiber
F = Single-mode (G.655) LEAF® fiber

3 Defines cable type.

U = ALTOS® Cable, Enhanced

4 Defines outer jacket.

E = Double-jacket, all-dielectric

5 Select fiber placement.

T = 12 fibers/buffer tube (standard)
6 = 6 fibers/buffer tube
See Note 1.

6 Select length markings.

3 = Markings in meters
4 = Markings in feet (standard)

7 Defines tensile strength.

1 = 2700 N/600 lbf (standard)

8 Select performance option code.

30 = 62.5 μm multimode (OM1)
31 = 50 μm multimode(OM2)
80 = 50 μm multimode (OM3)
90 = 50 μm multimode (OM4)
01 = Single-mode (OS2)
(Max. attenuation 0.4/0.4/0.3 dB/km)
00 = Single-mode (OS2)
(Max. attenuation 0.35/0.35/0.25 dB/km)
22 = Single-mode (OS2)
(Max. attenuation 0.34/0.34/0.22 dB/km)
19 = Single-mode (Ultra Low-Loss)
(Max. attenuation 0.33/-/0.19 dB/km)
01 = Single-mode NZDSF*
(Max. attenuation -/-/0.25 dB/km)

*Non-Zero Dispersion-Shifted Single-mode Fiber

9 Defines cable type.

A = Gel-filled cable

10 Defines special manufacturing code.

20 = No special requirements



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING