



Q



▶ Micro Battery

MS Lithium Rechargeable Battery

▶ MS414GE

▶ MS412FE

▶ MS518SE

▶ MS614SE

▶ MS621FE

▶ MS920SE

▶ MS920T (Wide temperature range)

▶ MS621T (Wide temperature range)

▶ TS Lithium Rechargeable Battery

▶ TS920E

▶ ML Lithium Rechargeable Battery

▶ ML414H

▶ Chip Capacitor

▶ CPX Capacitors

▶ CPX3225A752D

▶ CPH3225A

▶ XH Capacitors

▶ XH311HG

▶ XH311HU

▶ XH414HG

▶ Silver Oxide Battery

▶ SEIZAIKEN

▶ Cross reference chart

MS Lithium Rechargeable Battery MS920T (Wide Temperature)

SPECIFICATIONS


Type	MS920T
Operating Temperature Range (°C)	−40~+85
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage)(V)	2.8 to 3.3(3.1)
Nominal Capacity(mAh)	6.5
Internal Impedance(Ω)	60
Standard Charge Discharge Current(mA)	0.025
Maximum Discharge Current (Continuous)(mA)	0.40
Size Diameter(mm)	9.5
Size Height(mm)	2.0
Weight(g)	0.45



CHARACTERISTICS

Click to enlarge.

Terminals



+ Click to enlarge

SEIZAIKEN's new usage
except watches

Expiration Date Notification

For Your Safely

Select Guide

Micro battery's new challenge
for medical devices


Support

Global Network

Contact Us


Sitemap

Charge-Discharge Characteristics

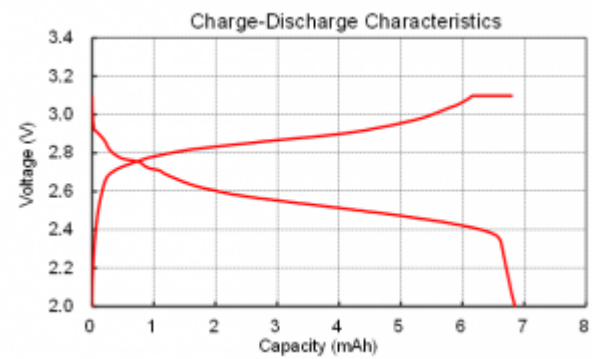

Charge	CC,CV	3.1V max200uA 72hr
Discharge	CC	25uA COV=2.0V

High Temperature Characteristics

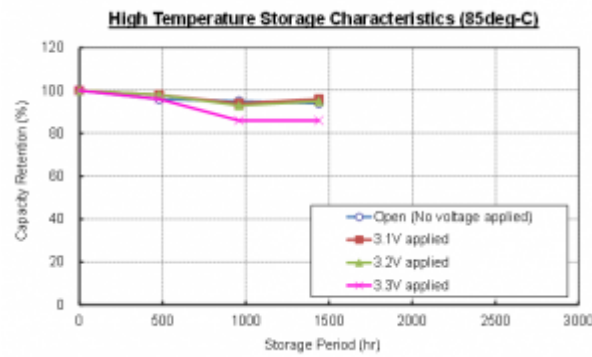

【 Storage Condition 】 85deg.-C, **V Impressed
【 Charge-Discharge Condition 】

Charge	CC,CV	3.1V, max200uA, 72hr, RT
Discharge	CC	25uA, cov=2.0V, RT

Please contact us for more details.

Inquiry Form