

Micro Battery

MS Lithium Rechargeable Battery
MS414GE
MS412FE
MS518SE
MS614SE
MS621FE
MS920SE
MS621T (Wide temperature range)
MS920T (Wide temperature range)
TS Lithium Rechargeable Battery
TS621E
TS920E
ML Lithium Rechargeable Battery
ML414H
Chip type Electric Double Layer Capacitor
CPH3225A
CPX3225A752D for energy harvesting
CPM3225A
Silver Oxide Battery
SEIZAIKEN
Cross reference chart
SEIZAIKEN's new usage except watches
Silver Oxide Battery Expiration Guide
For Your Safety
Micro battery's new challenge for medical devices
Support
Global Network
Contact Us
Sitemap


MS Lithium Rechargeable Battery MS621T (Wide range temperature)

SPECIFICATIONS

Type	MS621T
Operating Temperature Range (°C)	-40~+85
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage)(V)	2.8 to 3.3(3.1)
Nominal Capacity(mAh)	3.0
Internal Impedance(Ω)	80
Standard Charge Discharge Current(mA)	0.015
Maximum Discharge Current (Continuous)(mA)	0.1
Size Diameter(mm)	6.8
Size Height(mm)	2.1
Weight(g)	0.23



Terminals




MS621T FL11E

CHARACTERISTICS

Click to enlarge.


Charge-Discharge Characteristics

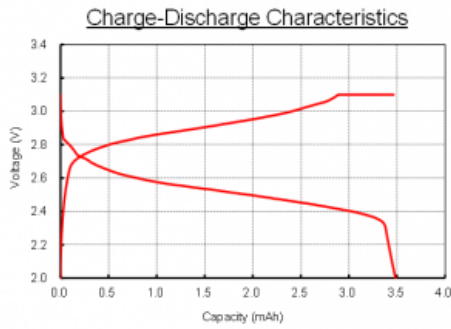

【 Charge-Discharge Condition 】

Charge	CC,CV	3.1V, max100uA , 96hr
Discharge	CC	15uA, COV=2.0V

High Temperature Characteristics

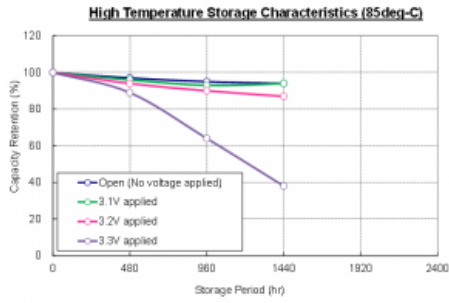

【 Storage Condition 】 85deg.-C, **V Impressed

【 Charge-Discharge Condition 】

Charge	CC,CV	3.1V, max100uA, 96hr, RT
Discharge	CC	15uA, cov=2.0V, RT

Please contact us for more details.

[Inquiry Form](#)