

SMD Power Inductor

CDH38D11D/LD



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 4.1 × 3.95 × 1.2mm Max.
- Product weight: 60mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40℃ ~ +105℃ (including coil's self temperature rise)
- Storage temperature range: -40℃ ~ +105℃
- Solder reflow temperature: 260 ℃ peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 4000pcs per reel


Applications

- Ideally used in Mobile phone, PDA, MP3, DVC/DSC, HDD etc. as DC-DC converter inductors.

Dimension - [mm]

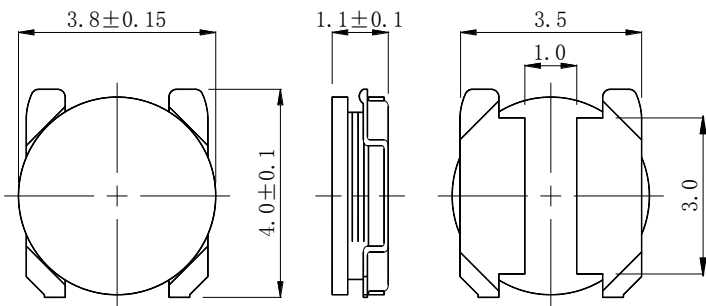

Land pattern and Schematics - [mm]

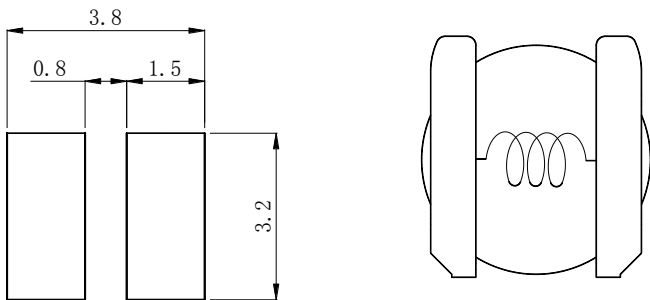

Electrical Characteristics

Part No.	Stamp	Inductance (μH) [Within] ※1	D.C.R. (mΩ) [Within] (at 20℃)	Saturation current (A) ※2 (at 20℃)	Temperature rise current (A) ※3
CDH38D11DLDNP-1R1MC	C	1.1±20%	49±25%	2.00	2.15
CDH38D11DLDNP-1R5MC	E	1.5±20%	58±25%	1.75	2.10
CDH38D11DLDNP-2R4MC	G	2.4±20%	77±25%	1.40	1.75
CDH38D11DLDNP-3R3MC	J	3.3±20%	99±25%	1.20	1.50
CDH38D11DLDNP-4R7MC	L	4.7±20%	136±20%	1.00	1.30
CDH38D11DLDNP-6R8MC	N	6.8±20%	203±20%	0.85	1.08
CDH38D11DLDNP-100MC	Q	10±20%	310±20%	0.70	0.88
CDH38D11DLDNP-150MC	S	15±20%	460±20%	0.56	0.65
CDH38D11DLDNP-220MC	U	22±20%	690±20%	0.47	0.56

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40℃(Ta=20℃).










SMD Power Inductor

CDH38D11D/LD



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

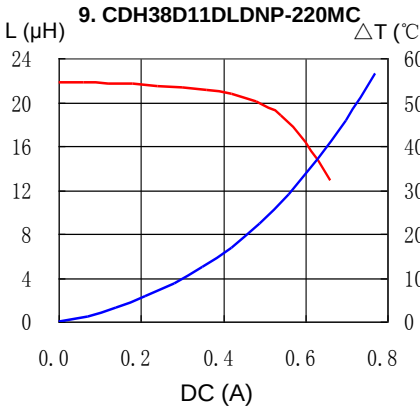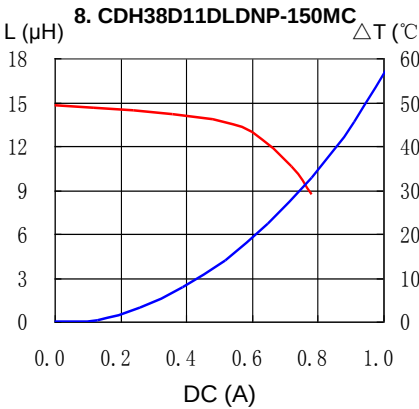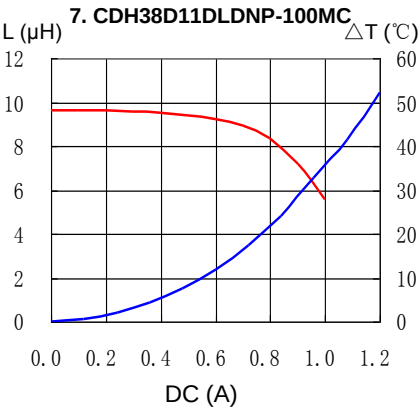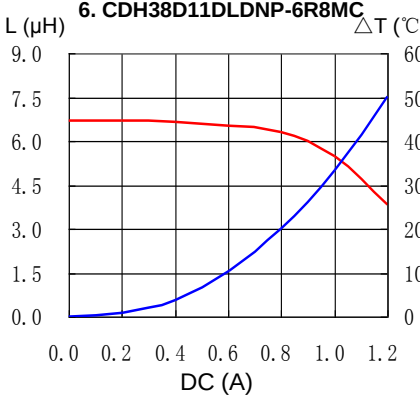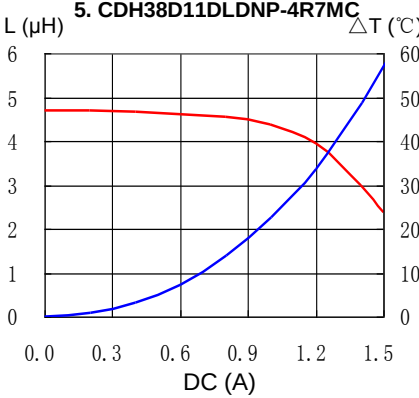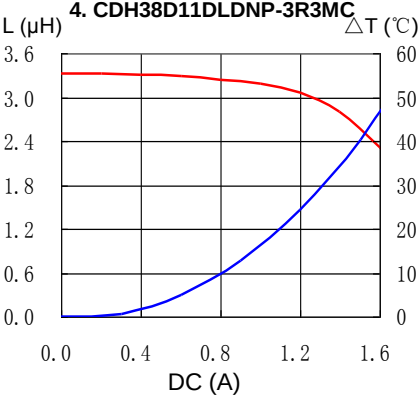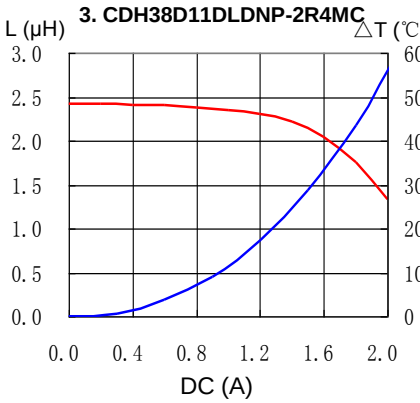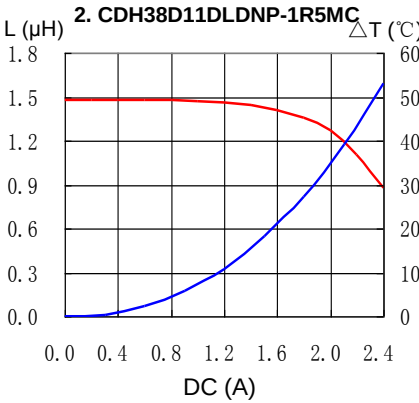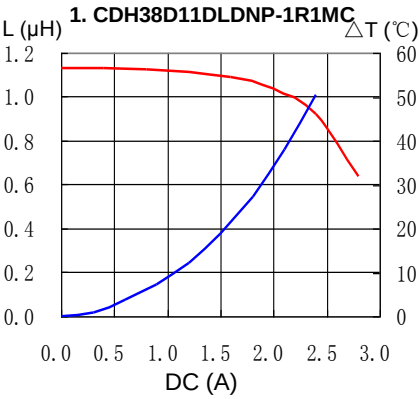


SMD Power Inductor CDH38D11D/LD




Solder Reflow Condition

Heat Endurance

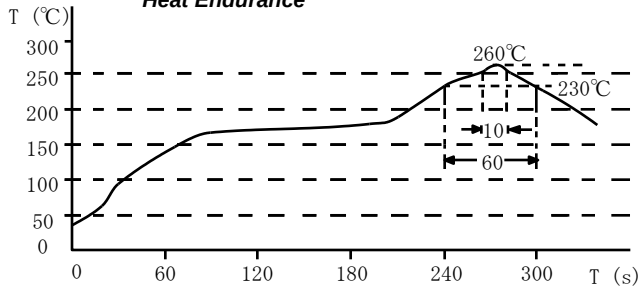

Temperature Chart

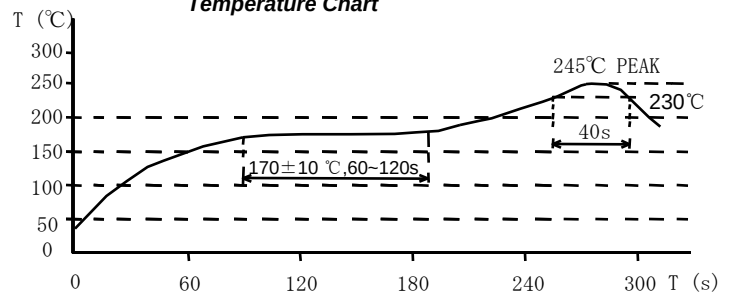

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com