

SMD Power Inductor

CDPQ2417



Description

- Ferrite core construction.
- Magnetically shielded.
- L×W×H:27.5×26.5×18.0mm Max.
- Product weight: 30g(Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C


Packaging

- Pallet packaging. 40pcs per pallet, 200pcs per package.


Applications

- High Current Inductor for DC/DC converters in distributed power systems and PV inverters etc.


Dimension - [mm]

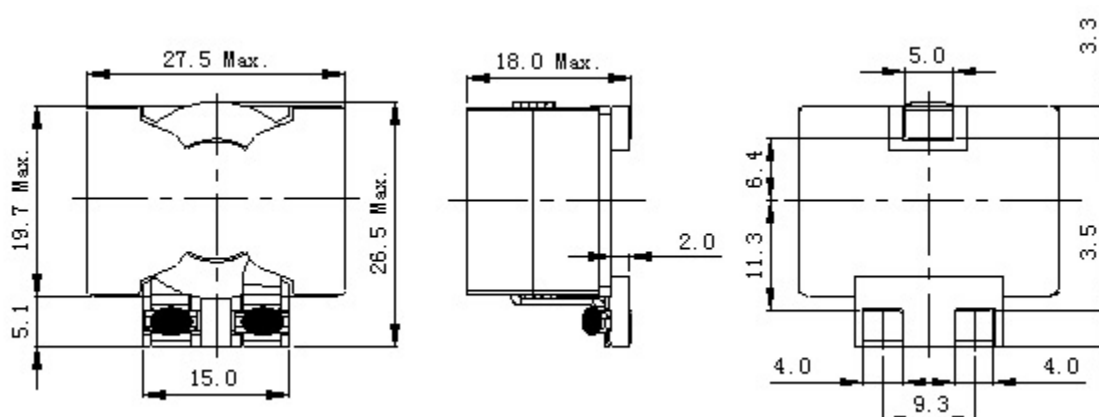

Recommended Land pattern - [mm]

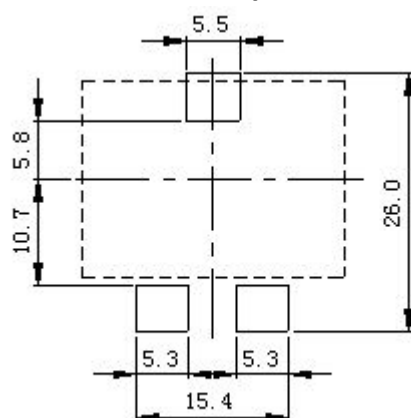

Wire Connection



SMD Power Inductor

CDPQ2417



Electrical Characteristics



Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2	Temperature Rise Current (A) Max.(Typ.) ※3
CDPQ2417NP-2R2MB	2.20 $\pm$ 20%	2.05 (1.80)	(100)	(30.00)
CDPQ2417NP-3R3MB	3.30 $\pm$ 20%	2.05 (1.80)	(72.00)	(30.00)
CDPQ2417NP-4R7MB	4.70 $\pm$ 20%	2.05 (1.80)	(52.00)	(30.00)
CDPQ2417NP-6R8MB	6.80 $\pm$ 20%	2.05 (1.80)	(35.00)	(30.00)
CDPQ2417NP-100MB	10.00 $\pm$ 20%	2.05 (1.80)	(23.00)	(30.00)
CDPQ2417NP-150MB	15.00 $\pm$ 20%	2.05 (1.80)	(15.20)	(30.00)

※1 Measuring condition at 100kHz 0.1V.

※2 Saturation current: The actual value of D.C. current when the inductance decreases to 80% of it's initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Solder Reflow Condition

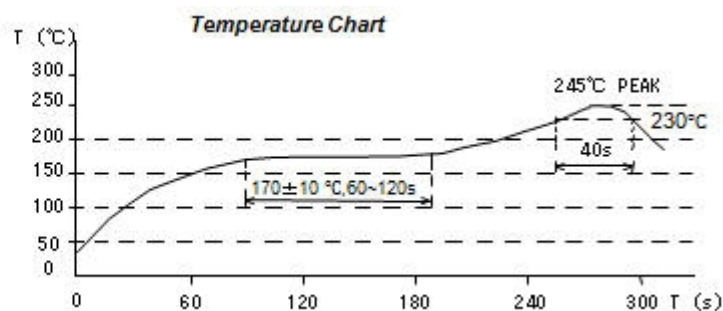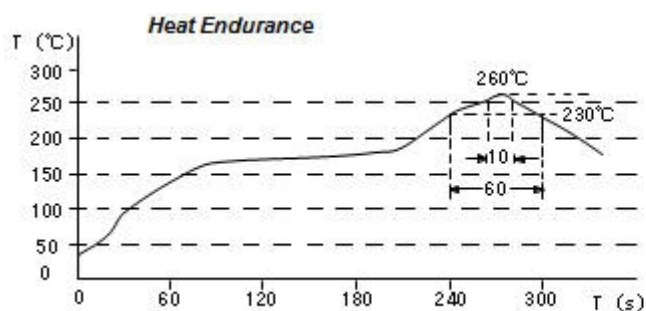

SMD Power Inductor


CDPQ2417




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. CDPQ2417NP-2R2MB

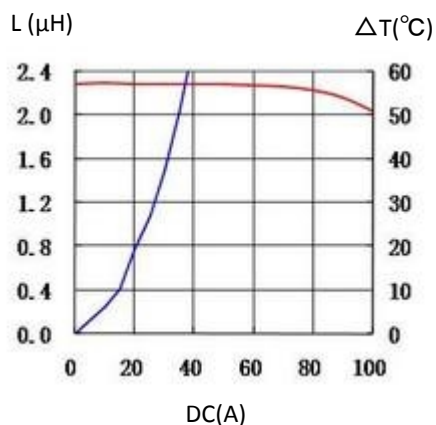


2. CDPQ2417NP-3R3MB

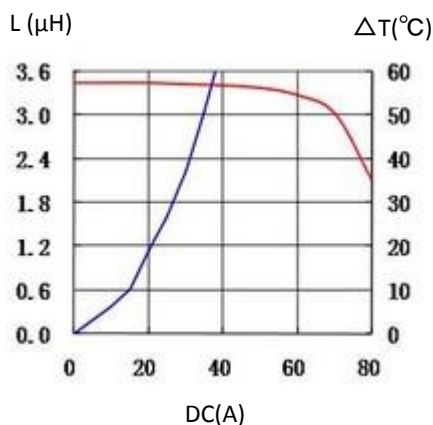


3. CDPQ2417NP-4R7MB

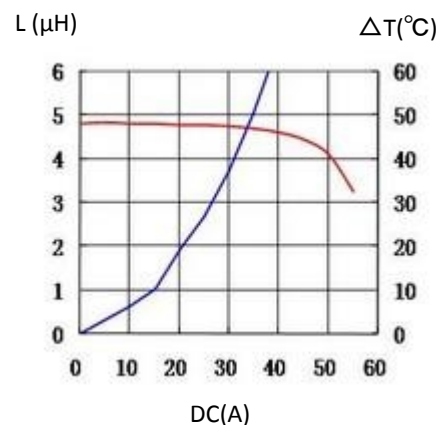


4. CDPQ2417NP-6R8MB

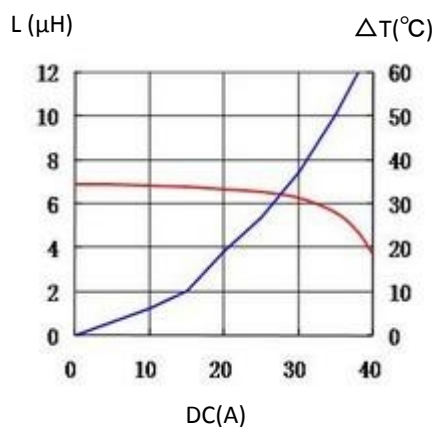

5. CDPQ2417NP-100MB

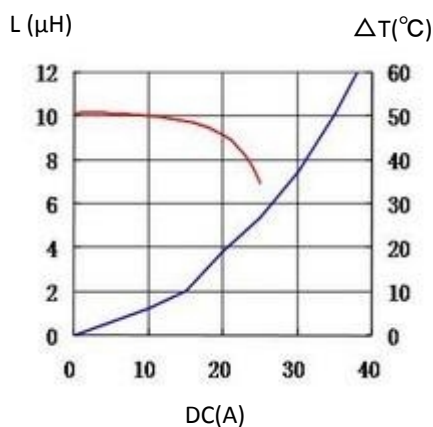

6. CDPQ2417NP-150MB

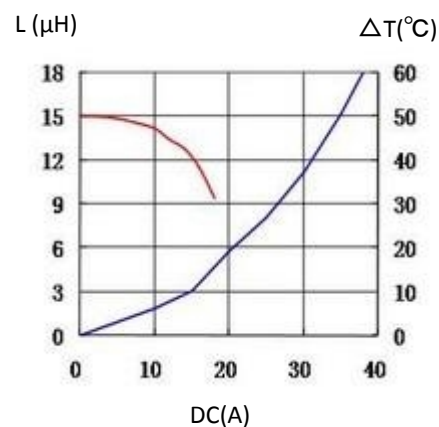

For sales office information, please [click here](#) to visit our website.