



95 E. Jefryn Boulevard
Deer Park, NY 11729
Tel (631) 595-1818
Fax (631) 595-1283

HER101G thru HER108G

Glass Passivated High Efficient Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere

Features

- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability




Mechanical Data

- ◆ Case: Molded plastic DO-204AL(DO-41)/A-405
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:
250°C/10 seconds .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◆ Weight: DO-41 - 0.012 ounce, 0.335 gram
A-405 - 0.008 ounce, 0.22 gram

DO-204AL (DO-41)

A-405

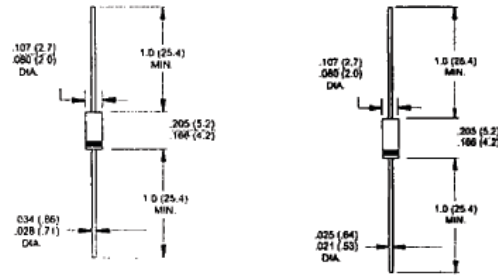

Note: Lead diameter is 0.025(0.64)/0.021(0.53) for part numbers from HER101SG thru HER108SG

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbols	HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	Units	
Maximum repetitive peak reverse voltage	V_{RM}	50	100	200	300	400	600	800	1000	Volts	
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	Volts	
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	Volts	
Maximum average forward rectified current .375" (9.5mm) lead length @ $T_A=55^\circ\text{C}$	I_{AV}	1.0								Amp	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0								Amps	
Maximum instantaneous forward voltage @ 1.0A	V_F	1.0			1.3		1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage	I_R					5.0		100			μA μA
Maximum reverse recovery time (Note 1)	t_r	50				75				nS	
Typical junction capacitance (Note 2)	C_j	20				15				pF	
Typical thermal resistance	$R_{\theta JA}$ $R_{\theta JC}$					60		18			$^\circ\text{C/W}$
Operating temperature range	T_J	-55 to +150								$^\circ\text{C}$	
Storage temperature range	T_{STG}	-55 to +150								$^\circ\text{C}$	

Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

www.surgecomponents.com



95 E. Jeffryn Boulevard
Deer Park, NY 11729
Tel (631) 595-1818
Fax (631) 595-1283

RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


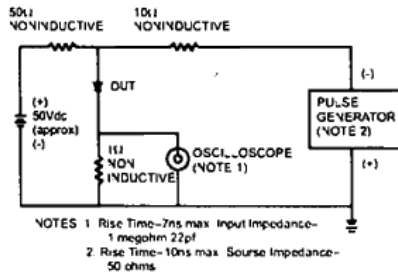


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE




FIG.3- TYPICAL REVERSE CHARACTERISTICS

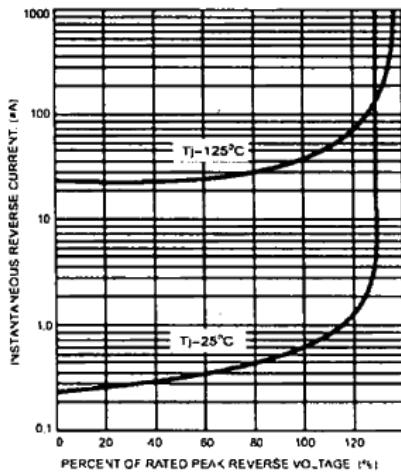


FIG.4- TYPICAL FORWARD CHARACTERISTICS

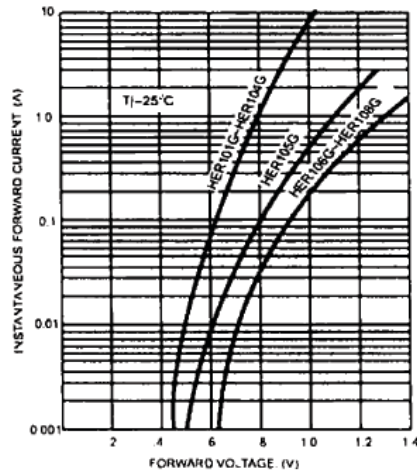


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

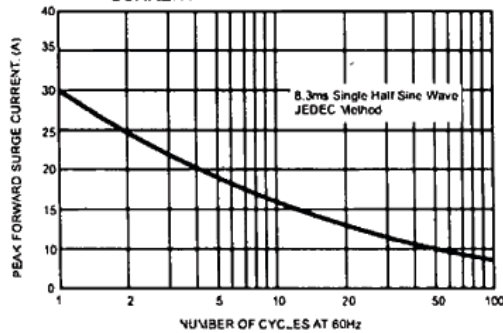


FIG.6- TYPICAL JUNCTION CAPACITANCE

