




# GBU4A thru GBU4M

Glass Passivated Single-Phase Bridge Rectifiers  
Reverse Voltage 50 to 1000 Volts Forward Current 4.0 Amperes

## Features

- ◆ Ideal for printed circuit boards
- ◆ High surge current capability
- ◆ High case dielectric strength of 1500 V<sub>RMS</sub>
- ◆ Solder Dip 260 °C, 40 seconds

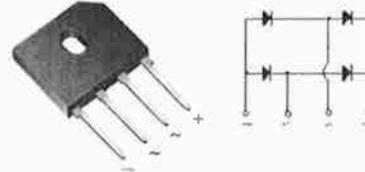


## Mechanical Data

- ◆ Case: GBU  
Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D
- ◆ Polarity: As marked on body
- ◆ Mounting Torque: 10 cm-kg (8.8 inches-lbs) max.
- ◆ Recommended Torque: 5.7 cm-kg (5 inches-lbs)

## Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications.

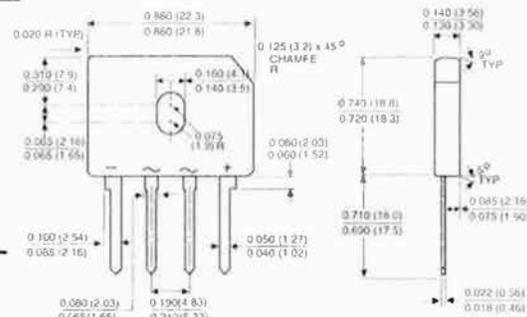

Polarity shown on front side of case. positive lead by beveled corner  
Package outline dimensions in inches (millimeters)

## Maximum Ratings and Electrical Characteristics

T<sub>A</sub> = 25 °C, unless otherwise specified.

Parameter	Symbols	GBU4A	GBU4B	GBU4D	GBU4G	GBU4J	GBU4K	GBU4M	Units	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified output current at T <sub>C</sub> =100°C (1) T <sub>A</sub> =40°C (2)	I <sub>F(AV)</sub>	4.0 3.0						Amps		
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150.0						Amps		
Rating for fusing (t<8.3ms)	Pt	93						A <sup>2</sup> sec		
Maximum instantaneous forward voltage drop per leg at 2.0A	V <sub>F</sub>	1.0						Volt		
Maximum DC reverse current at rated DC blocking voltage per leg T <sub>A</sub> =25°C T <sub>A</sub> =125°C	I <sub>R</sub>	5.0 500.0						µA		
Typical junction capacitance per leg at 4.0V, 1MHz	C <sub>J</sub>	100				45				pF
Typical thermal resistance per leg	R <sub>JA</sub> (1) R <sub>JC</sub> (1)	22 4.2						°C/W		
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150						°C		

- Notes: 1 Unit case mounted on 1.6 x 1.6 x 0.06" thick (5.1 x 5.1 x 0.15 cm) Al Plate  
2 Units mounted on P.C.B. with 0.5 x 0.5" (12.7 x 12.7 mm) copper pads and 0.375" (9.5 mm) lead length



## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

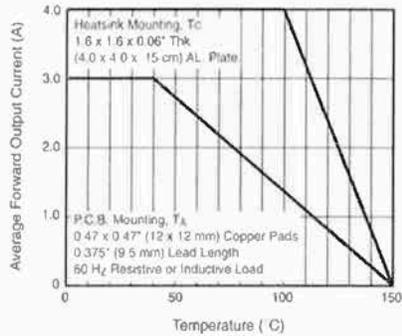


Figure 1. Derating Curve Output Rectified Current

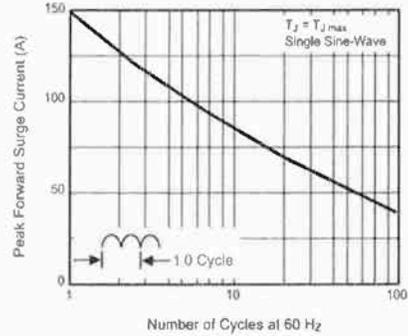


Figure 2. Maximum Non-Replicative Peak Forward Surge Current Per Leg

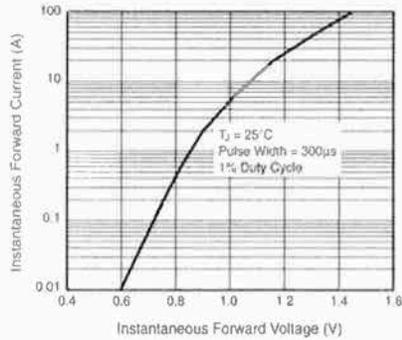


Figure 3. Typical Forward Characteristics Per Leg

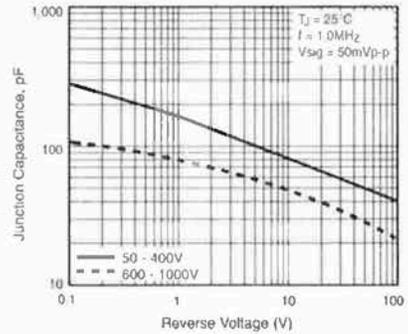


Figure 5. Typical Junction Capacitance Per Leg

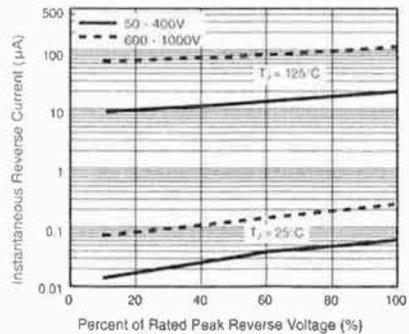


Figure 4. Typical Reverse Leakage Characteristics Per Leg

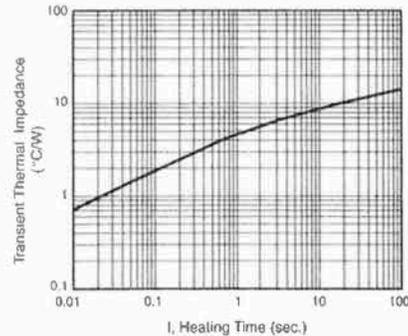


Figure 6. Typical Transient Thermal Impedance