

## **PRODUCT DATA DRAWING**

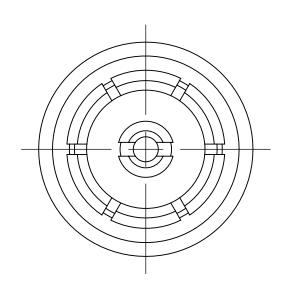

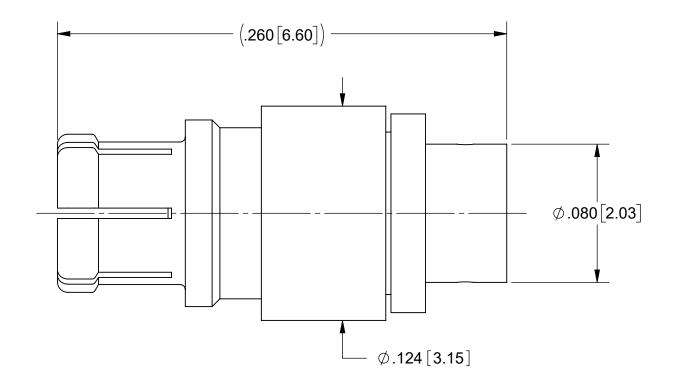

## MATERIAL:

BODY, FERRULE& CONTACT:BERYLLIUM COPPER

INSULATOR: PTFE

## FINISH:

BODY, CONTACT & FERRULE: GOLD OVER COPPER

## **PERFORMANCE:**

IMPEDANCE: FREQ. RANGE: 50 OHMS DC TO 40.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X* ±1*0'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 151 & LAST THREADS.		Amphenol WWW.svmicrowave.com		
FINISH:	SEE NOTES	X*X' ±15' DECIMAL: X ±.030 .XX ±.010					
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.J.R. 7) REMOVE ALL BURRS		SMPM JACK (NON-MAGNETIC) FOR .047 CABLE		
PROPRIETARY							
	ATION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE, INC. UCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF VE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN: SJ 05/27/20				
ANY REPROD			CHECKED:	STW 05/27/20	B 3221-401		40131
			APPROVED:	STW 05/27/20	SCALE: 18:1		SHEET 1 OF 1

REVISION HISTORY								
REV	DESCRIPTION	DATE	APPROVED					
-	NRN 44863	05/20	STW					