



SAW Components

SAW Duplexer

LTE Band 7


Series/type:	B8659
Ordering code:	B39272B8659P810
Date:	February 27, 2015
Version:	2.0

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Application

- Low-loss SAW duplexer for mobile telephone
LTE Band 7 systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 70 MHz
- 50 Ω single-ended in both in Antenna-Rx
and Tx-Antenna paths

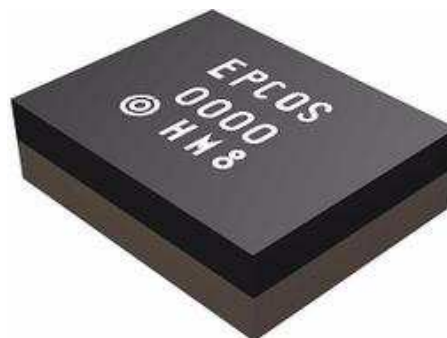


Features

- Package size 1.8 x 1.4 mm²
- Max. package height 0.475mm
- RoHS compatible
- Approx. weight 0.0042 g
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

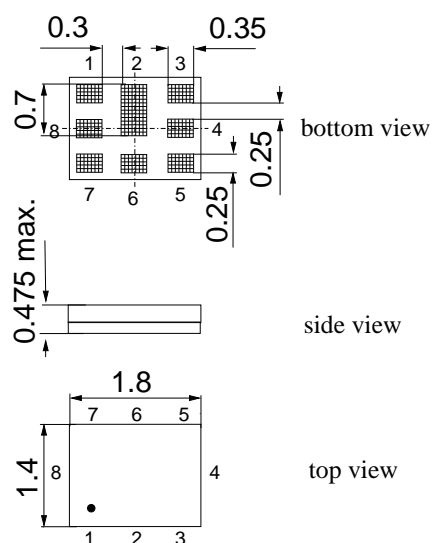

Pin configuration

- 3 Tx Input
- 1 Rx Output
- 6 Antenna
- 2,4,5,7,8 To be grounded

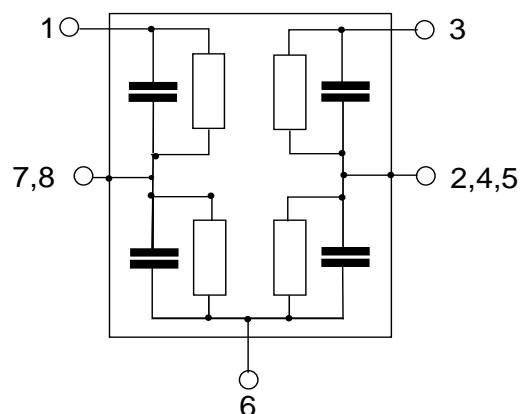

SAW Components
B8659
SAW Duplexer
2535.0 / 2655.0 MHz
Data sheet

Characteristics

Temperature range for specification:	T	=	-20 °C to +90 °C
Ant terminating impedance:	Z _{Ant}	=	50 Ω 2.7 nH
Rx terminating impedance:	Z _{Rx}	=	50 Ω
Tx terminating impedance:	Z _{Tx}	=	50 Ω

Characteristics Tx - Antenna				min.	typ. @ 25°C	max.	
Center frequency	f _C			—	2535.0	—	MHz
Maximum insertion attenuation	α _{max}			—	1.8	2.8	dB
2500.0 ... 2570.0 MHz							
Amplitude ripple (p-p)	Δα			—	0.8	1.8	dB
2500.0 ... 2570.0 MHz							
Error Vector Magnitude	EVM ¹⁾						
@f _{Carrier} 2502.4 ... 2567.6 MHz				—	0.7	2.5	%
@f _{Carrier} 2502.4 ... 2567.6 MHz				—	0.7	2.0 ²⁾	%
Input VSWR (Tx port)							
2500.0 ... 2570.0 MHz				—	1.6	2.1	
Output VSWR (Ant port)							
2500.0 ... 2570.0 MHz				—	1.8	2.2	

¹⁾ Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

²⁾ Valid for room temperature at 25°C.

Data sheet

Characteristics

Temperature range for specification:	T	= -20 °C to +90 °C
Ant terminating impedance:	Z _{Ant}	= 50 Ω 2.7 nH
Rx terminating impedance:	Z _{Rx}	= 50 Ω
Tx terminating impedance:	Z _{Tx}	= 50 Ω

Characteristics Tx - Antenna				min.	typ. @ 25°C	max.	
Attenuation α							
10.0	...	1559.0	MHz	33	39	—	dB
1559.0	...	1563.0	MHz	33	38	—	dB
1565.42	...	1573.374	MHz	33	38	—	dB
1573.374	...	1577.466	MHz	32	38	—	dB
1577.466	...	1585.42	MHz	32	38	—	dB
1597.552	...	1605.886	MHz	32	38	—	dB
1605.886	...	1680.0	MHz	32	37	—	dB
1805.0	...	1880.0	MHz	30	36	—	dB
1900.0	...	1920.0	MHz	30	36	—	dB
2010.0	...	2025.0	MHz	30	35	—	dB
2110.0	...	2170.0	MHz	30	35	—	dB
2402.0	...	2440.0	MHz	33	36	—	dB
2440.0	...	2460.0	MHz	33	36	—	dB
2470.0	...	2474.0	MHz	14	39	—	dB
2474.0	...	2500.0	MHz	0.5	1.8	—	dB
2590.0	...	2620.0	MHz	1.5	8	—	dB
2620.0	...	2690.0	MHz	45	48	—	dB
4900.0	...	5000.0	MHz	30	37	—	dB
5000.0	...	5140.0	MHz	30	36	—	dB
5140.0	...	5280.0	MHz	30	36	—	dB
7500.0	...	7710.0	MHz	15	23	—	dB

Data sheet

Characteristics

Temperature range for specification:	T	= -20 °C to +90 °C
Ant terminating impedance:	Z _{Ant}	= 50 Ω 2.7 nH
Rx terminating impedance:	Z _{Rx}	= 50 Ω
Tx terminating impedance:	Z _{Tx}	= 50 Ω

Characteristics Antenna - Rx				min.	typ. @ 25°C	max.	
Center frequency		f _C		—	2655.0	—	MHz
Maximum insertion attenuation		α _{max}		—	2.2	3.3	dB
2620.0	...	2690.0	MHz				
Amplitude ripple (p-p)		Δα		—	0.7	1.9	dB
2620.0	...	2690.0	MHz				
Input VSWR (Ant port)				—	1.9	2.2	
2620.0	...	2690.0	MHz				
Output VSWR (Rx port)				—	1.8	2.1	
2620.0	...	2690.0	MHz				
Attenuation		α					
10.0	...	718.0	MHz	50	55	—	dB
		45.0	MHz	50	90	—	dB
718.0	...	748.0	MHz	50	55	—	dB
814.0	...	849.0	MHz	45	53	—	dB
832.0	...	862.0	MHz	45	53	—	dB
880.0	...	915.0	MHz	45	52	—	dB
1710.0	...	1785.0	MHz	37	41	—	dB
1920.0	...	1980.0	MHz	37	40	—	dB
2400.0	...	2500.0	MHz	40	43	—	dB
2500.0	...	2570.0	MHz	45	57	—	dB
2570.0	...	2600.0	MHz	3	8	—	dB
2775.0	...	2790.0	MHz	40	46	—	dB
2790.0	...	2810.0	MHz	40	46	—	dB
2810.0	...	3660.0	MHz	37	41	—	dB
3600.0	...	4900.0	MHz	35	42	—	dB
4900.0	...	5300.0	MHz	33	41	—	dB
5300.0	...	5950.0	MHz	30	36	—	dB
7620.0	...	7830.0	MHz	10	15	—	dB

Data sheet

Characteristics

Temperature range for specification:	T	=	-20 °C to +90 °C
Ant terminating impedance:	Z _{Ant}	=	50 Ω 2.7 nH
Rx terminating impedance:	Z _{Rx}	=	50 Ω
Tx terminating impedance:	Z _{Tx}	=	50 Ω

Characteristics Antenna - Rx	min.	typ. @ 25°C	max.	
IMD Product Level Limits¹⁾				
at f_{Tx}=2535.0 MHz, f_{Rx}=2655.0 MHz				
Blocker 1 120.0 MHz	—	-130	-110	dBm
Blocker 2 2415.0 MHz	—	-109	-100	dBm
Blocker 3 5190.0 MHz	—	-111	-100	dBm

¹⁾ IMD product level limits for power levels P_{Tx}=21.5dBm (antenna port output power) and P_{Blocker}=-15dBm (antenna port input power)

SAW Components
B8659
SAW Duplexer
2535.0 / 2655.0 MHz
Data sheet

Characteristics

Temperature range for specification:	T	=	-20 °C to +90 °C
Ant terminating impedance:	Z _{Ant}	=	50 Ω 2.7 nH
Rx terminating impedance:	Z _{Rx}	=	50 Ω
Tx terminating impedance:	Z _{Tx}	=	50 Ω

Characteristics Tx - Rx				min.	typ. @ 25°C	max.	
Isolation							
			α				
1574.0	...	1577.0	MHz	30	73	—	dB
2500.0	...	2560.0	MHz	54	57	—	dB
2560.0	...	2570.0	MHz	54 ¹⁾	59	—	dB
2560.0	...	2570.0	MHz	47	59	—	dB
2620.0	...	2690.0	MHz	50	53	—	dB
5000.0	...	5140.0	MHz	30	59	—	dB
7500.0	...	7710.0	MHz	25	44	—	dB

¹⁾ Valid for room temperature at 25°C.

Maximum ratings



Storage temperature range	T_{stg}	−40/+85	°C	
DC voltage	V_{DC}	5 ¹⁾	V	
ESD voltage	V_{ESD}	50 ²⁾	V	Machine Model
		300 ³⁾	V	Human Body Model
		600 ⁴⁾	V	Charged Device Model
Input power at	P_{IN}			
2500.0 ... 2570.0 MHz		28	dBm	} continuous wave 50°C, 5000 h
elsewhere		10	dBm	

1) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.


2) acc. to JESD22-A115B (MM - Machine Model), 10 negative and 10 positive pulses.

3) acc. to JESD22-A114F (HBM - Human Body Model) , 1 negative & 1 positive pulses.


4) acc. to JESD22-C101C (CDM - Field Induced Charged Device Model) , 3 negative & 3 positive pulses.

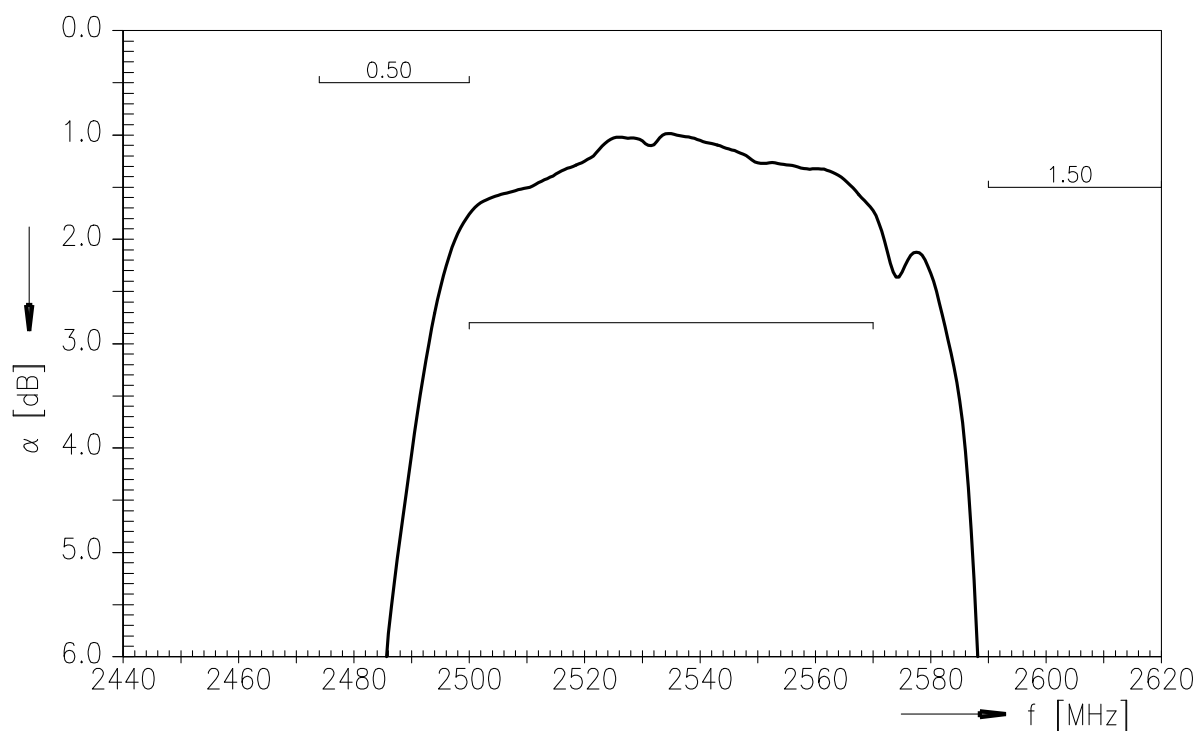
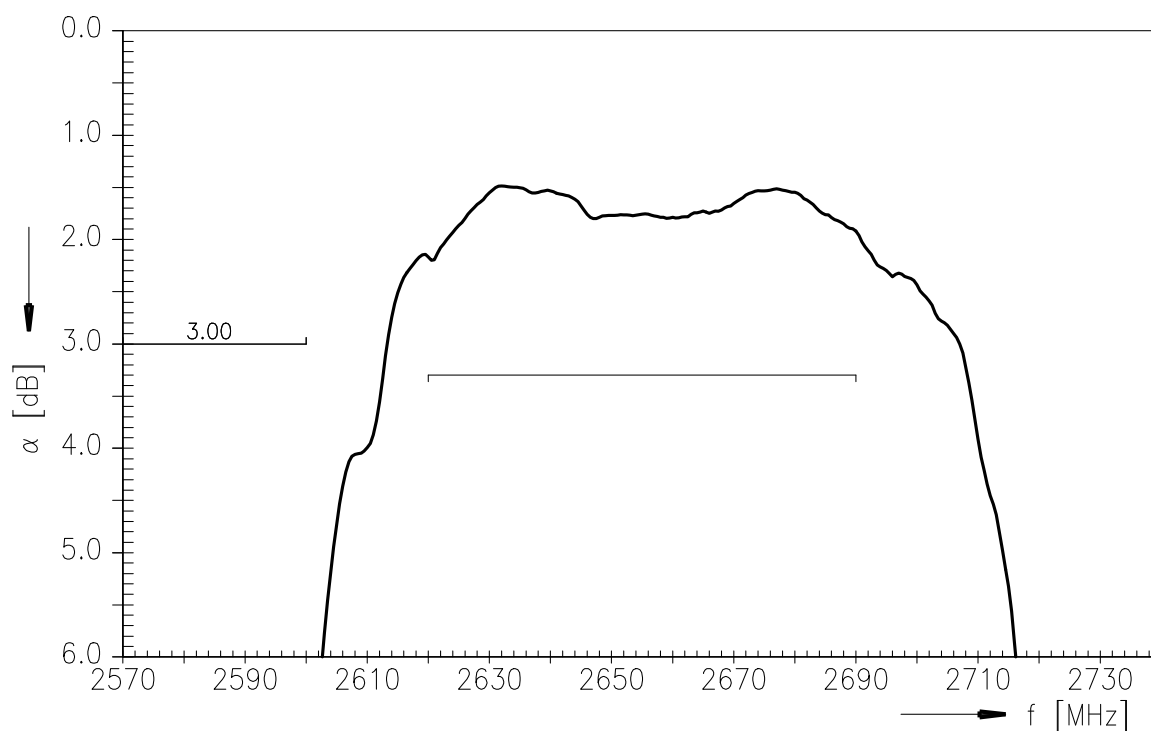
Frequency response Tx-Antenna (passband)

Frequency response Antenna-Rx (passband)

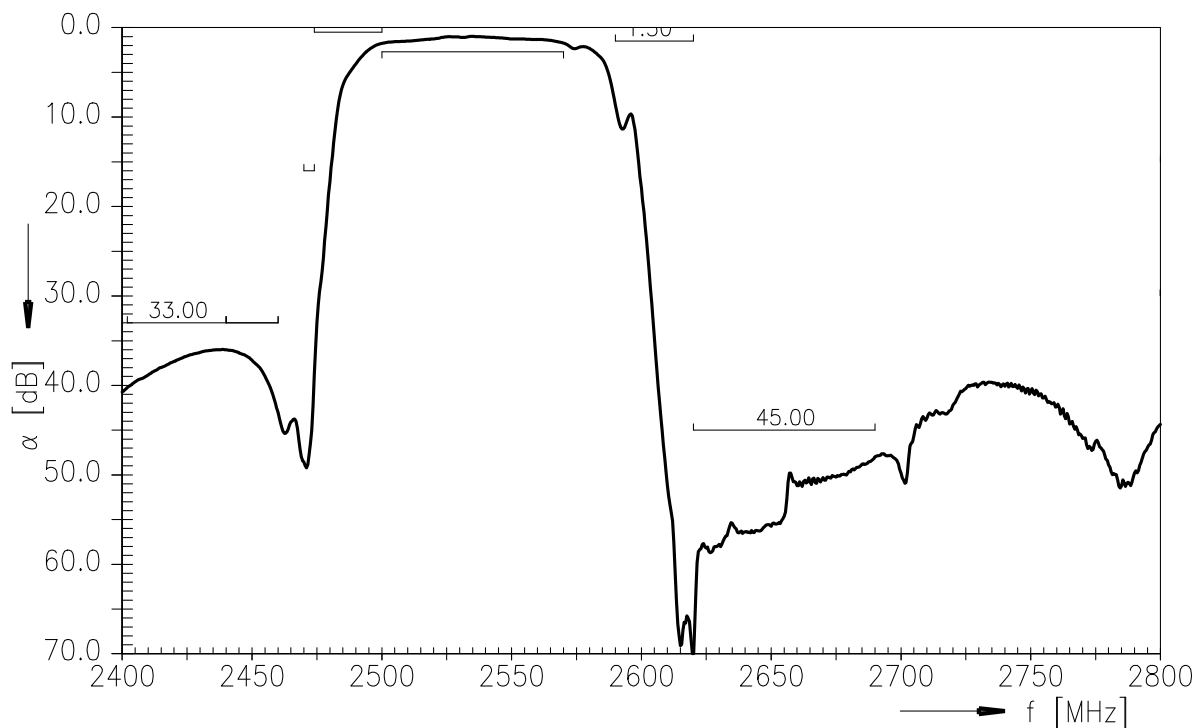
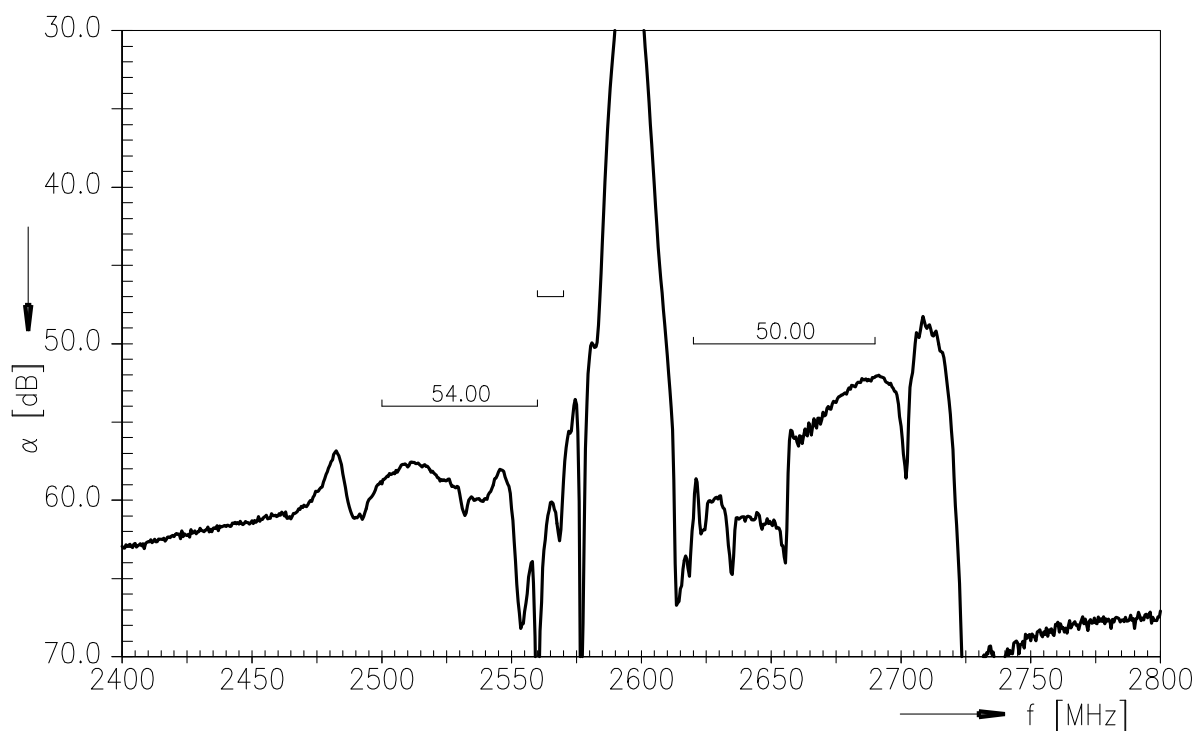
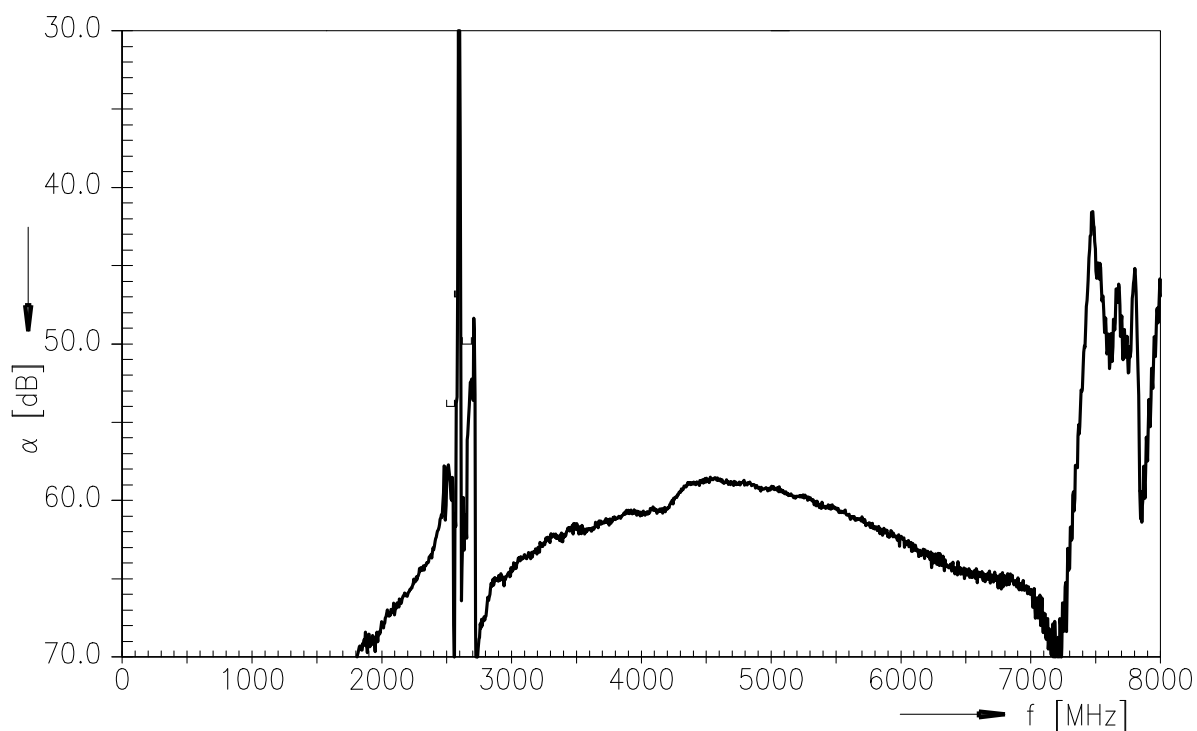
Frequency response Tx-Antenna (narrowband)

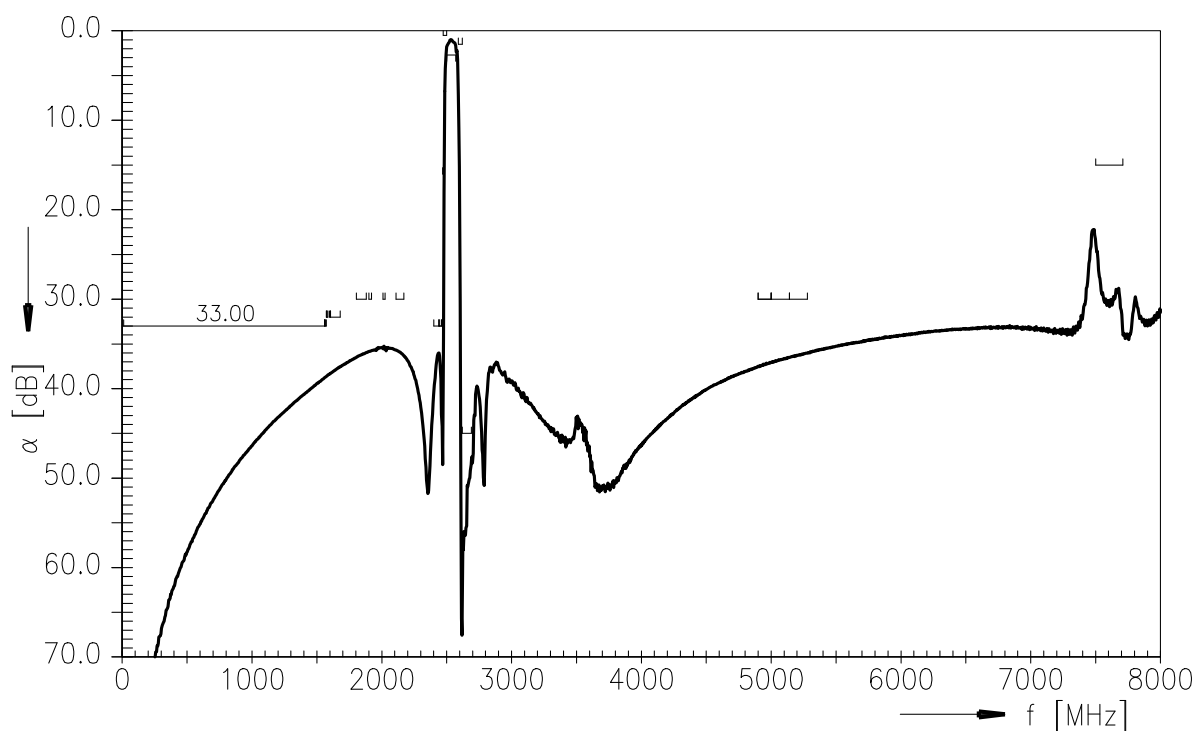

Frequency response Tx-Antenna (wideband)

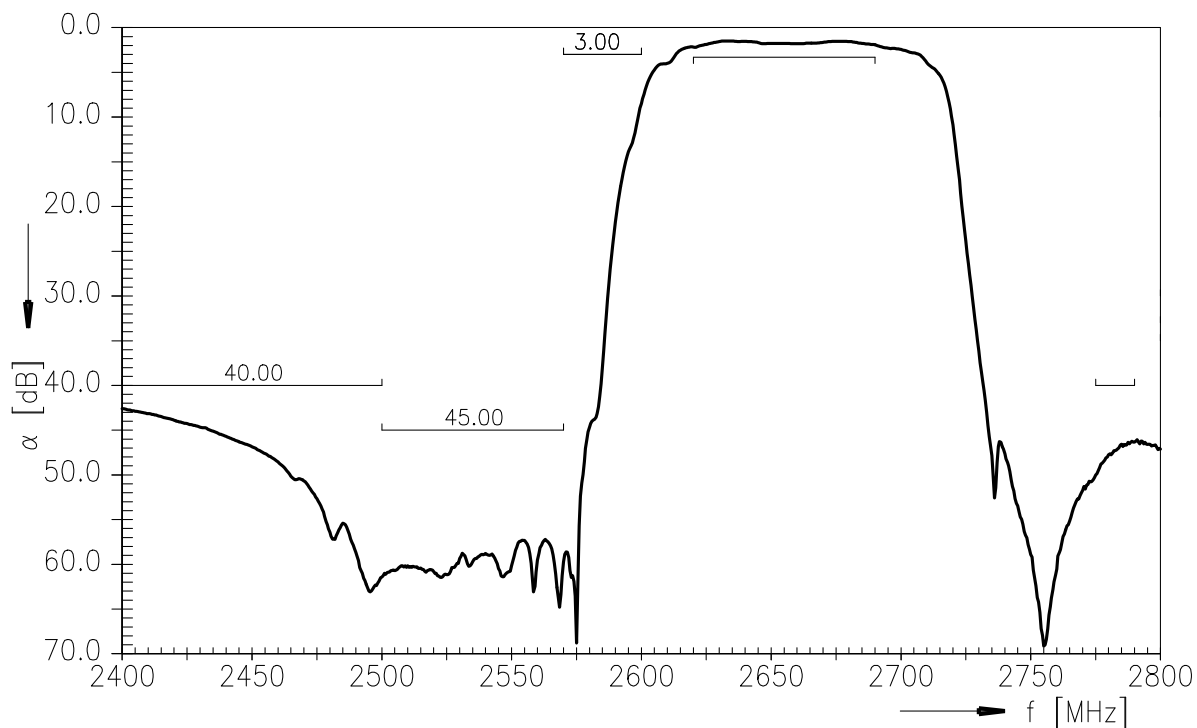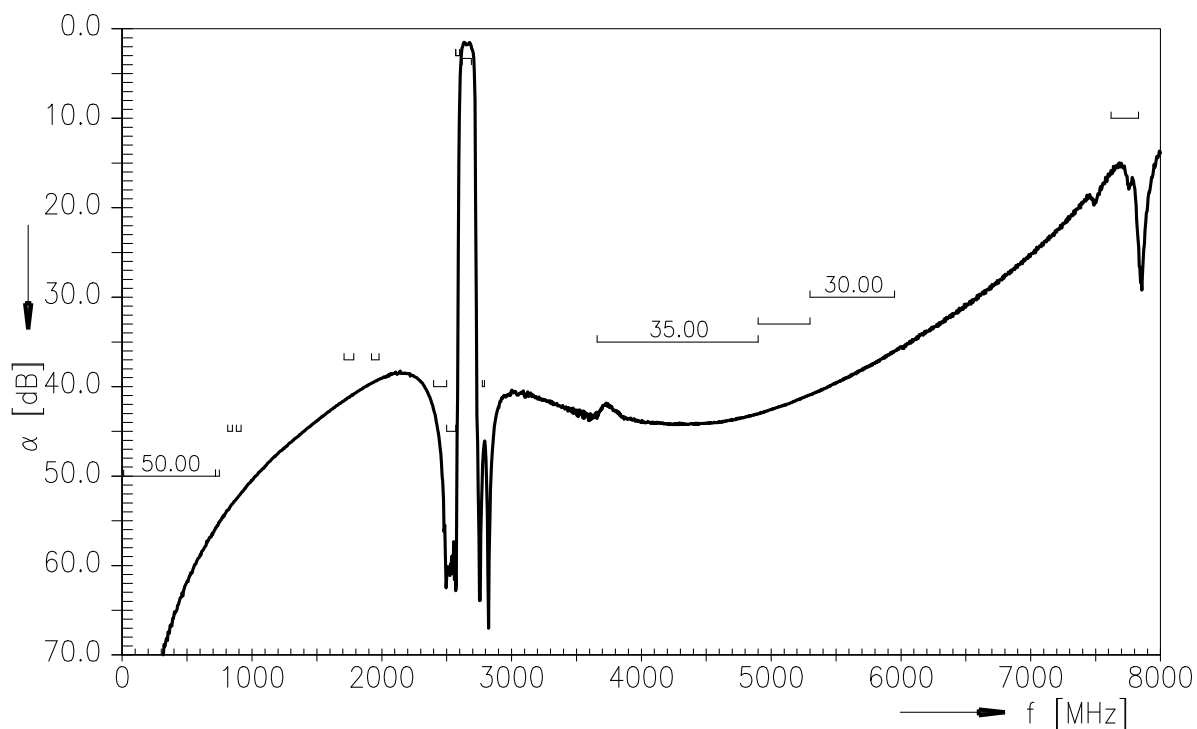







Frequency response Antenna-Rx (narrowband)

Frequency response Antenna-Rx (wideband)


Frequency response Tx-Rx (narrowband)

Frequency response Tx-Rx (wideband)


Data sheet

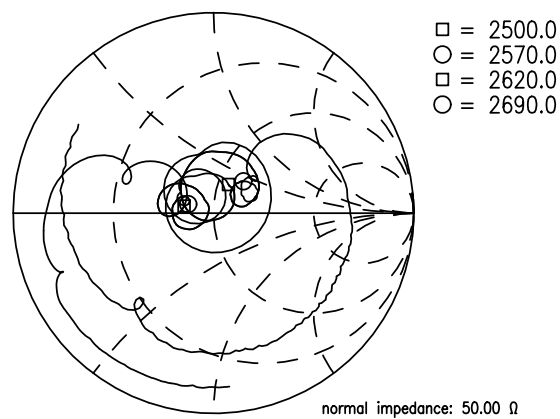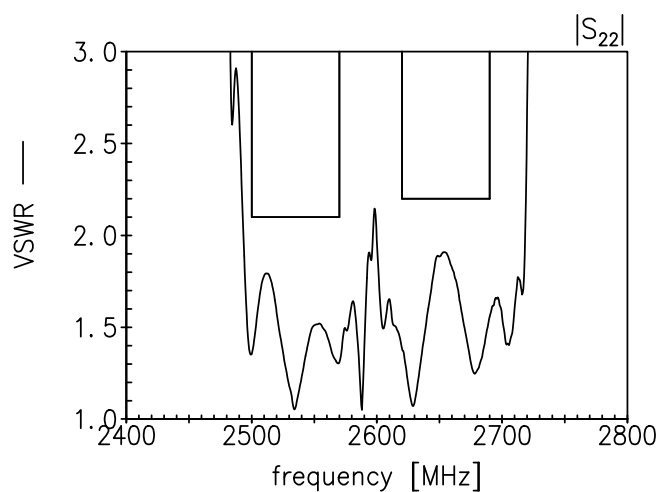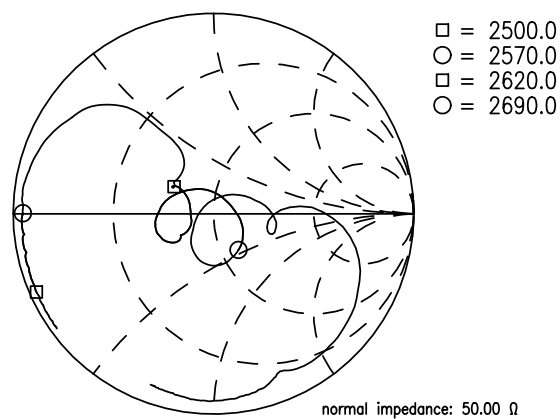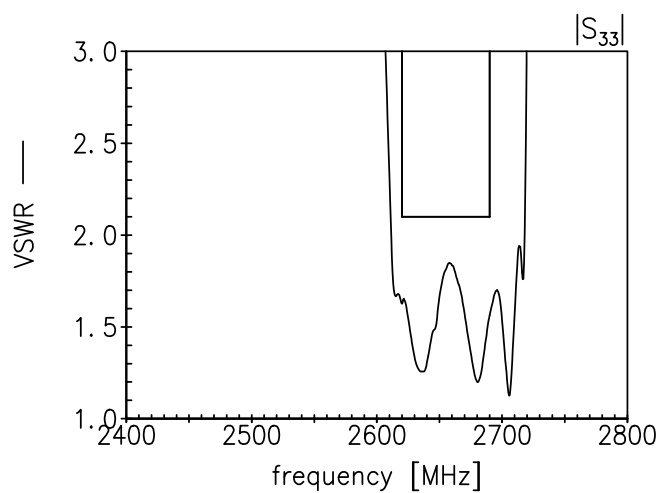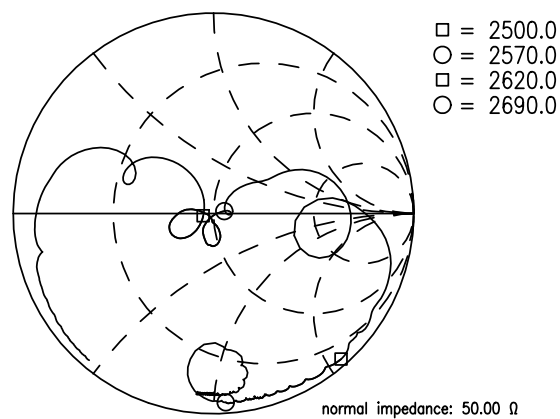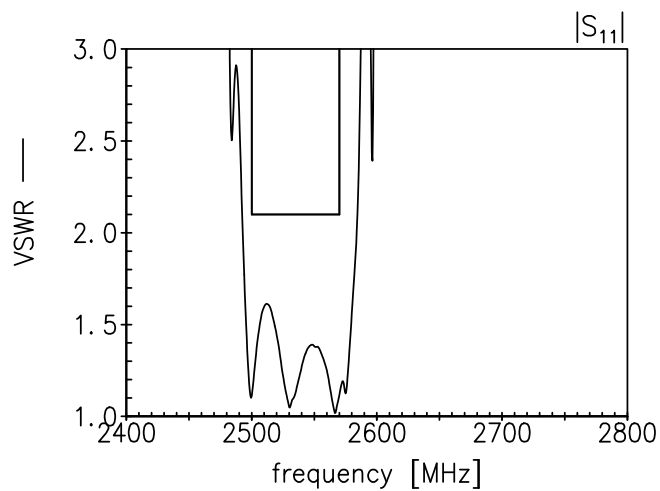

VSWR S_{11} Tx-port S_{22} Antenna-port S_{33} Rx-port



References

Type	B8659
Ordering code	B39272B8659P810
Marking and package	C61157-A8-A98
Packaging	F61074-V8259-Z000
Date codes	L_1126
S-parameters	B8659_NB_UN.s3p, B8659_WB_UN.s3p See file header for pin/port assignment.
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

Published by EPCOS AG

Systems, Acoustics, Waves Business Group

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2015. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, Alu-X, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PQSine, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.