



Applications	Automotive Grade
Feature	Shield Magnetic Shield Wire Wound Ferrite Core AEC-Q200 AEC-Q200
Series Type	CLF-D
Status	Production
Brand	ток




Size		
Length(L)	6.20mm ±0.20mm	
Width(W)	5.90mm ±0.20mm	
Thickness Height	4.50mm ±0.30mm	
Recommended Land Pattern (A)	1.70mm Nom.	
Recommended Land Pattern (B)	3.60mm Nom.	
Recommended Land Pattern (C)	2.20mm Nom.	

Electrical Characteristics				
Inductance	33µH ±20% at 100kHz			
Rated Current (L Change) [Typ.]	1.07A (10% Down)			
Rated Current (L Change) [Max.]				
Rated Current (Temperature Rise) [Typ.]	1.5A (30°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	103mΩ			
DC Resistance [Max.]	123.6mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 150°C		
Caldering Method	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	Yes		
Packing	Blister (Plastic)Taping [330mm Reel]		
Package Quantity	1000pcs		
I Images are for reference only and show exemplary products. I This PDF document was created based on the data listed on the TDK Corporation website. I All specifications are subject to change without notice.	0.6g		





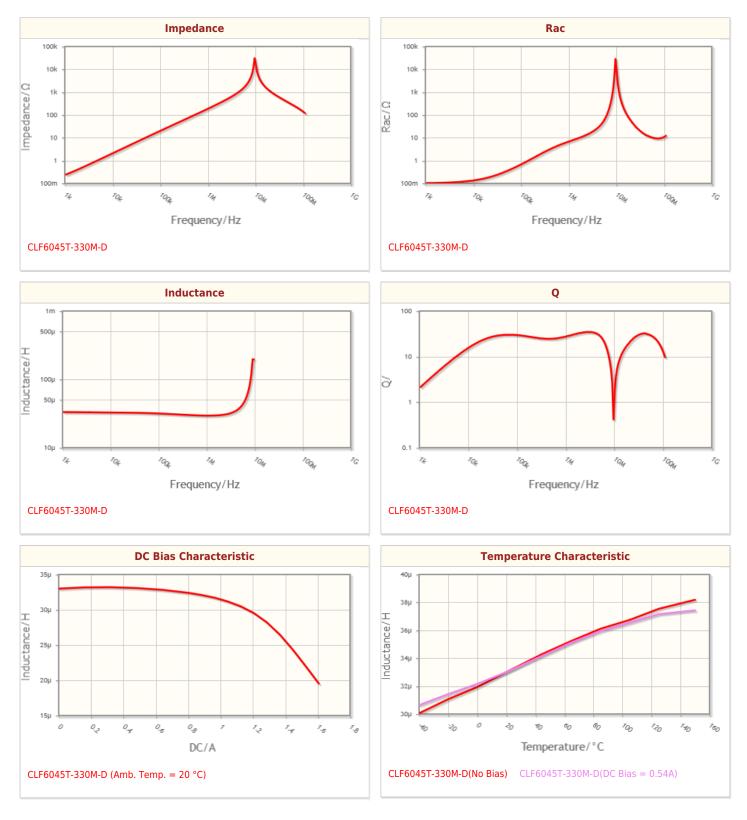

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.





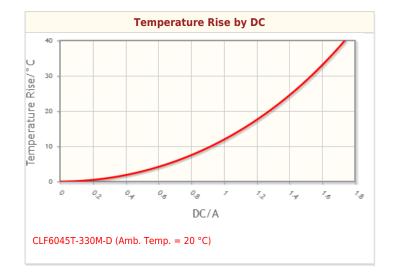

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.





Associated Images

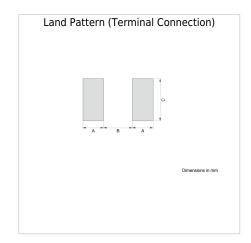

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.