

1.5KE6.8-400CA Series

GLASS PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

Voltage 6.8 to 400 Volts 1500 Watt Peak Pulse Power




Mechanical Data

Case: Moulded plastic over passivated junction
Terminals: Plated Axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Colour band denotes positive end (cathode) except Bi-directionals

Mounting Position: Any

Weight: 0.045 ounce, 1.2 gram

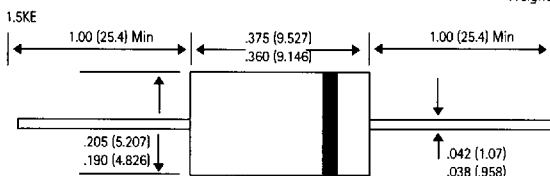

Features:

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction in Molded Plastic package
- 1500W Peak Pulse Power capability on 10/1000 us waveform
- Repetition Rate (duty cycle): 0.05%
- Excellent clamping capability
- Low incremental surge resistance
- Fast response time: typically less than 1.0 ps from 0 volts to BV for unidirectional and 5.0 nS for bidirectional types
- Typical I_g less than 1 uA above 10V
- High temperature soldering guaranteed: 300°C/10 seconds/.375", (9.5mm) lead length/5lbs., (2.3 kg) tension

Devices for Bi-Directional Applications

For Bi-directional use C or CA Suffix.

Maximum Ratings and Characteristics

@ 25°C ambient temperature unless otherwise specified

		Value	Units
P_{PPM}	Peak Pulse Power Dissipation on 10/1000 us Waveform (Note 1)	Min 1500	Watts
I_{PPM}	Peak Pulse Current on 10/1000 us waveform (Note 1)	See Table	Amps
$P_{M(AV)}$	Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$.		
	Lead Length .375", (9.5mm) (Note 2)	5.0	Watts
I_{FSM}	Peak Forward Surge Current,		
	8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method) Unidirectional (Note 3)	200	Amps
V_F	Maximum Instantaneous Forward Voltage		
	@ 50.0 A for Uni-directional only (Note 3)	3.5/5.0	Volts
$T_{J,TSTG}$	Operating Junction and Storage Temperature Range	-65 to + 175	°C.

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_a = 25^\circ\text{C}$ per Fig. 2.

2. Mounted on Copper Leaf area of 1.57 in² (40mm²) per Fig. 5.

3. 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per Minute maximum.

1.5KE6.8-400CA Series

JEDEC Type	Device	Breakdown Voltage VBR @ IT (Note 1)		@ IT	Reverse Stand-off Voltage Vwm	Max Reverse Leakage @ Vwm (Note 3)	Max Peak Pulse Current Ipp (Note 2)	Max Clamping Voltage @ Ipp	Max Temp. Coefficient of Vbr
		Min	Max	mA	Volts	Io uA	Amps	Vc Volts	%/Deg C
1N6267	1.5KE6.8	6.12	7.48	10	5.50	1000	139	10.8	0.057
1N6267A	1.5KE6.8A	6.45	7.14	10	5.80	1000	143	10.5	0.057
1N6268	1.5KE7.5	6.75	8.25	10	6.05	500	128	11.7	0.061
1N6268A	1.5KE7.5A	7.13	7.88	10	6.40	500	132	11.3	0.061
1N6269	1.5KE8.2	7.38	9.02	10	6.63	200	120	12.5	0.065
1N6269A	1.5KE8.2A	7.79	8.61	10	7.02	200	124	12.1	0.065
1N6270	1.5KE9.1	8.19	10.0	1.0	7.37	50	109	13.8	0.068
1N6270A	1.5KE9.1A	8.65	9.55	1.0	7.78	50	112	13.4	0.068
1N6271	1.5KE10	9.00	11.0	1.0	8.10	10	100	15.0	0.073
1N6271A	1.5KE10A	9.50	10.5	1.0	8.55	10	103	14.5	0.073
1N6272	1.5KE11	9.90	12.1	1.0	8.92	5.0	93.0	16.2	0.075
1N6272A	1.5KE11A	10.5	11.6	1.0	9.40	5.0	96.0	15.6	0.075
1N6273	1.5KE12	10.8	13.2	1.0	9.72	5.0	87.0	17.3	0.076
1N6273A	1.5KE12A	11.4	12.6	1.0	10.2	5.0	90.0	16.7	0.078
1N6274	1.5KE13	11.7	14.3	1.0	10.5	5.0	79.0	19.0	0.081
1N6274A	1.5KE13A	12.4	13.7	1.0	11.1	5.0	82.0	18.2	0.081
1N6275	1.5KE15	13.5	16.5	1.0	12.1	5.0	68.0	22.0	0.084
1N6275A	1.5KE15A	14.3	15.8	1.0	12.8	5.0	71.0	21.2	0.084
1N6276	1.5KE16	14.4	17.6	1.0	12.9	5.0	64.0	23.5	0.086
1N6276A	1.5KE16A	15.2	16.8	1.0	13.6	5.0	67.0	22.5	0.086
1N6277	1.5KE18	16.2	19.8	1.0	14.5	5.0	56.5	26.5	0.088
1N6277A	1.5KE18A	17.1	18.9	1.0	15.3	5.0	59.5	26.2	0.088
1N6278	1.5KE20	18.0	22.0	1.0	16.2	5.0	51.5	29.1	0.090
1N6278A	1.5KE20A	19.0	21.0	1.0	17.1	5.0	54.0	27.7	0.090
1N6279	1.5KE22	19.8	24.2	1.0	17.8	5.0	47.0	31.9	0.092
1N6279A	1.5KE22A	20.9	23.1	1.0	18.8	5.0	49.0	30.6	0.092
1N6280	1.5KE24	21.6	26.4	1.0	19.4	5.0	43.0	34.7	0.094
1N6280A	1.5KE24A	22.8	25.2	1.0	20.5	5.0	45.0	33.2	0.094
1N6281	1.5KE27	24.3	29.7	1.0	21.8	5.0	38.5	39.1	0.096
1N6281A	1.5KE27A	25.7	28.4	1.0	23.1	5.0	40.0	37.5	0.096
1N6282	1.5KE30	27.0	33.0	1.0	24.3	5.0	34.5	43.5	0.097
1N6282A	1.5KE30A	28.5	31.5	1.0	25.6	5.0	36.0	41.4	0.097
1N6283	1.5KE33	29.7	36.3	1.0	26.8	5.0	31.5	47.7	0.098
1N6283A	1.5KE33A	31.4	34.7	1.0	28.2	5.0	33.0	45.7	0.098
1N6284	1.5KE36	32.4	39.6	1.0	29.1	5.0	29.0	52.0	0.099
1N6284A	1.5KE36A	34.2	37.8	1.0	30.8	5.0	30.0	49.9	0.099
1N6285	1.5KE39	35.1	42.9	1.0	31.6	5.0	26.5	56.4	0.100
1N6285A	1.5KE39A	37.1	41.0	1.0	33.3	5.0	28.0	53.9	0.100
1N6286	1.5KE43	38.7	47.3	1.0	34.8	5.0	24.0	61.9	0.101
1N6286A	1.5KE43A	40.9	45.2	1.0	36.8	5.0	25.3	59.3	0.101
1N6287	1.5KE47	42.3	51.7	1.0	38.1	5.0	22.2	67.8	0.101
1N6287A	1.5KE47A	44.7	49.4	1.0	40.2	5.0	23.2	64.8	0.101
1N6288	1.5KE51	45.9	56.1	1.0	41.3	5.0	20.4	73.5	0.102
1N6288A	1.5KE51A	48.5	53.6	1.0	43.6	5.0	21.4	70.1	0.102
1N6289	1.5KE56	50.4	61.6	1.0	45.4	5.0	18.6	80.5	0.103
1N6289A	1.5KE56A	53.2	58.8	1.0	47.8	5.0	19.5	77.0	0.103
1N6290	1.5KE62	55.8	68.2	1.0	50.2	5.0	16.9	89.0	0.104
1N6290A	1.5KE62A	58.9	65.1	1.0	53.0	5.0	17.7	85.0	0.104
1N6291	1.5KE68	61.2	74.8	1.0	55.1	5.0	15.3	98.0	0.104
1N6291A	1.5KE68A	64.6	71.4	1.0	58.1	5	16.3	92.0	0.104
1N6292	1.5KE75	67.5	82.5	1.0	60.7	5.0	13.9	109	0.105
1N6292A	1.5KE75A	71.3	78.8	1.0	64.1	5.0	14.6	104	0.105



1.5KE6.8-400CA Series

JEDEC Type	Device	Breakdown Voltage VBR @ IT (Note 1)		@ IT	Reverse Stand-off Voltage Vwm	Max Reverse Leakage @ Vwm (Note 3)	Max Peak Pulse Current Ipp (Note 2)	Max Clamping Voltage @ Ipp	Max Temp. Coefficient of Vbr
		Min	Max						
1N6293	1.5KE82	73.8	90.2	1.0	66.4	5.0	12.7	118	0.105
1N6293A	1.5KE82A	77.9	86.1	1.0	70.1	5.0	13.3	113	0.105
1N6294	1.5KE91	81.9	100	1.0	73.7	5.0	11.4	131	0.106
1N6294A	1.5KE91A	86.5	95.5	1.0	77.8	5.0	12.0	125	0.106
1N6295	1.5KE100	90.0	110	1.0	81.0	5.0	10.4	144	0.106
1N6295A	1.5KE100A	95.0	105	1.0	85.5	5.0	11	137	0.106
1N6296	1.5KE110	99.0	121	1.0	89.2	5.0	9.5	158	0.107
1N6296A	1.5KE110A	105	116	1.0	94.0	5.0	9.9	152	0.107
1N6297	1.5KE120	108	132	1.0	97.2	5.0	8.7	173	0.107
1N6297A	1.5KE120A	114	126	1.0	102	5.0	9.1	165	0.107
1N6298	1.5KE130	117	143	1.0	105	5.0	8.0	187	0.107
1N6298A	1.5KE130A	124	137	1.0	111	5.0	8.4	179	0.107
1N6299	1.5KE150	135	165	1.0	121	5.0	7.0	215	0.108
1N6299A	1.5KE150A	143	158	1.0	128	5.0	7.2	207	0.108
1N6300	1.5KE160	144	176	1.0	130	5.0	6.5	230	0.108
1N6300A	1.5KE160A	152	168	1.0	136	5.0	6.8	219	0.108
1N6301	1.5KE170	153	187	1.0	138	5.0	6.2	244	0.108
1N6301A	1.5KE170A	162	179	1.0	145	5.0	6.4	234	0.108
1N6302	1.5KE180	162	198	1.0	146	5.0	5.8	258	0.108
1N6302A	1.5KE180A	171	189	1.0	154	5.0	6.1	246	0.108
1N6303	1.5KE200	180	220	1.0	162	5.0	5.2	287	0.108
1N6303A	1.5KE200A	190	210	1.0	171	5.0	5.5	274	0.108
	1.5KE220	198	242	1.0	175	5.0	4.3	344	0.108
	1.5KE220A	209	231	1.0	185	5.0	4.6	328	0.108
	1.5KE250	225	275	1.0	202	5.0	5.0	360	0.110
	1.5KE250A	237	267	1.0	214	5.0	5.0	344	0.110
	1.5KE300	270	330	1.0	243	5.0	5.0	430	0.110
	1.5KE300A	285	315	1.0	256	5.0	5.0	414	0.110
	1.5KE350	315	385	1.0	284	5.0	4.0	504	0.110
	1.5KE350A	332	368	1.0	300	5.0	4.0	482	0.110
	1.5KE400	360	440	1.0	324	5.0	4.0	574	0.110
	1.5KE400A	380	420	1.0	342	5.0	4.0	548	0.110

NOTES:

1. VBR measured after Ir applied for 3000us. Ir = Square Wave Pulse or equivalent.
2. Surge current Waveform per Figure 3 and Derate per Figure 2.
3. VF = 3.5V max., IF = 100A (1.5KE6.8 thru 1.5KE9.1A)
VF = 5.0V max., IF = 100A (1.5KE100 thru 1.5KE440A) per 1/2 Square or equivalent Sine Wave.
PW-8.3ms, Duty Cycle - 4 Pulses per minute maximum.
4. All terms and symbols are consistent with ANSI/IEEE CA62.35.

1.5KE6.8-400CA Series

1.5KE6.8-400CA Series

