


MARKETING SALES DRAWING


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.







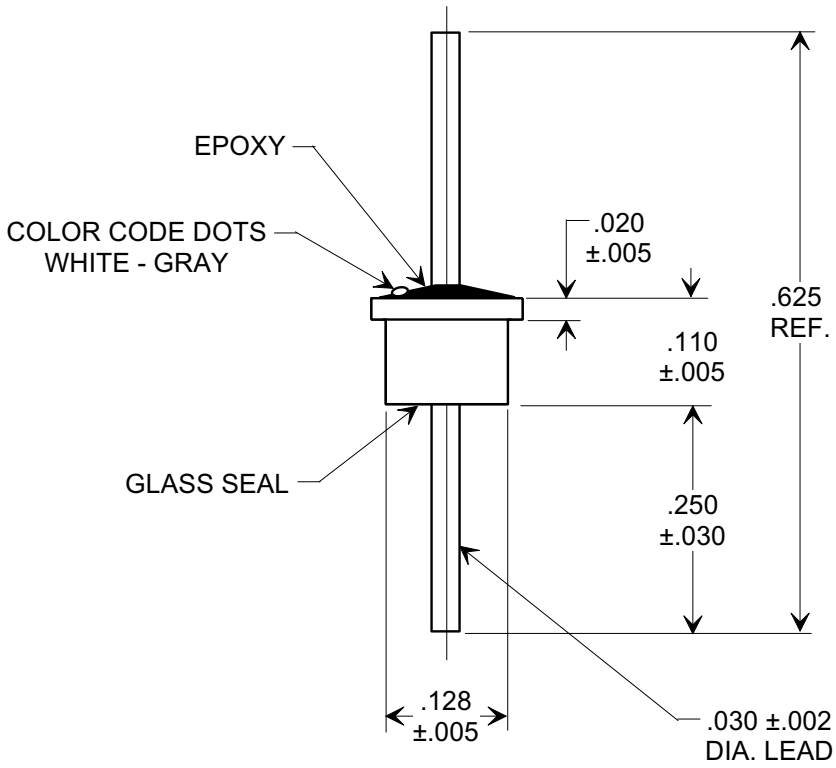

NOTES:
1. Solder plated case and lead.
2. Epoxy sealed on opposite end from glass.
3. Max. recommended soldering temperature: 260°C.
4. Recommended mounting hole: .135 Dia.
5. Solder preform available for mounting.
6. Anti-Static packaging.
7. Box marked: "Warning capable of static discharge".

Cx (pF)	DC Working Voltage		DC Current (Amps)	Dielectric Withstanding Voltage (VDC)	Insulation Resistance Min @ 100 (VDC)	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					Operating Temp. Range
	85°C	125°C				1 MHz	10 MHz	100 MHz	1GHz	10 GHz	
960/2160	300	200	5	500	100 G Ω	---	5	20	35	45	-55°C to +125°C

REVISION RECORD

Original Release	0
C.O.	19980211-1-06

--TOLERANCES--
Unless Otherwise Specified

DECIMAL ±

ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title
EMI FILTER

Drawn S.M. 02-18-98

Scale 5 X

Approved S.C. 02-18-98

A

4300-040

X-2015 Rev-0