

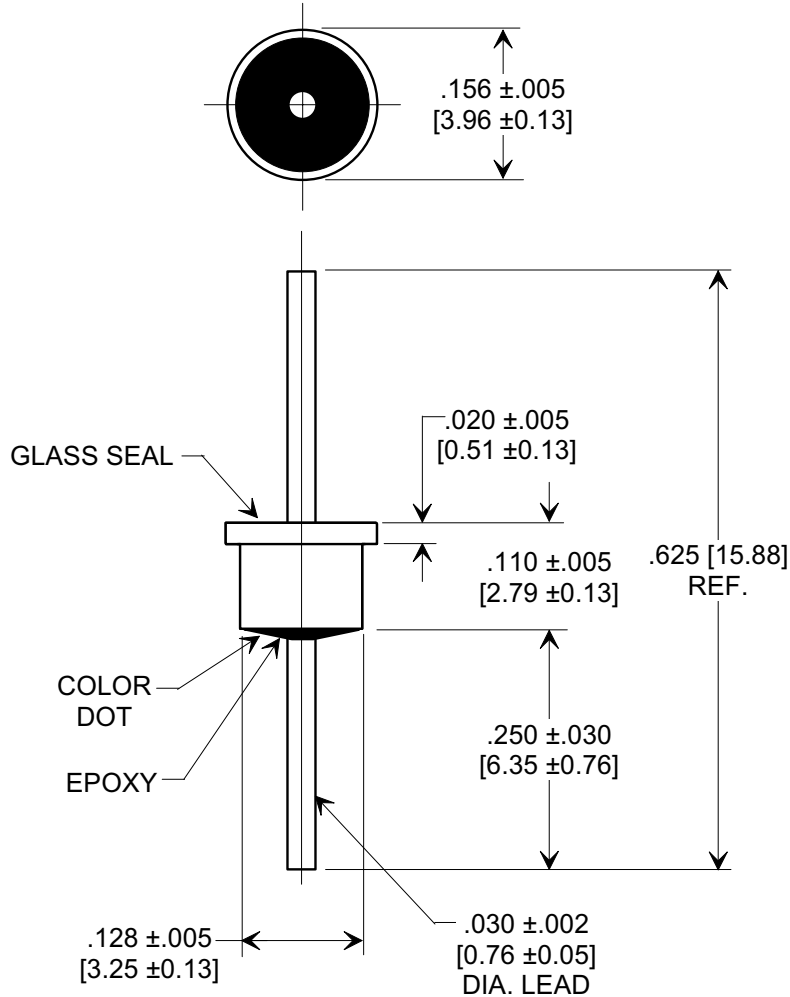


MARKETING SALES DRAWING
 DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

- Operating temperature range: -55°C to +125°C.
- Gold plated case and lead.
- Epoxy sealed on opposite end from glass seal.
- Max. recommended soldering temperature: 260°C.
See installation recommendations.
- Recommended mounting hole: .135 dia.
- Solder preform available for mounting.
- Tusonix Standard part number: 4300-064.
Tusonix RoHS compliant part number: 4300-064 LF.
Customer must specify Standard or RoHS part number when ordering.
- RoHS compliant part marked with additional dark green dot for identification.

Cx (pF)	DC WORKING VOLTAGE		I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					COLOR CODE
	85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz	
4000/6000	150	100	10 G	250	5	---	15	30	45	55	YELLOW/GOLD

X-2015 Rev-0
REVISION RECORD
 Original Release
 C.O. 20031120-2-01
 ADDED NOTES 7 & 8.
 S.M. 05-23-05
 20050511-2-37

--TOLERANCES-- Unless Otherwise Specified		Title	
DECIMAL ± NOTED		SOLDER MOUNT EMI FILTER	
ANGLES ±		Drawn L.E. 11-20-03	Scale 5 X
TUSONIX TUCSON, ARIZONA		Approved T.C. 11-20-03	
A		4300-064	