



# MARKETING SALES DRAWING

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING  
DIMENSIONS IN METRIC - [ ]




CIRCUIT



**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

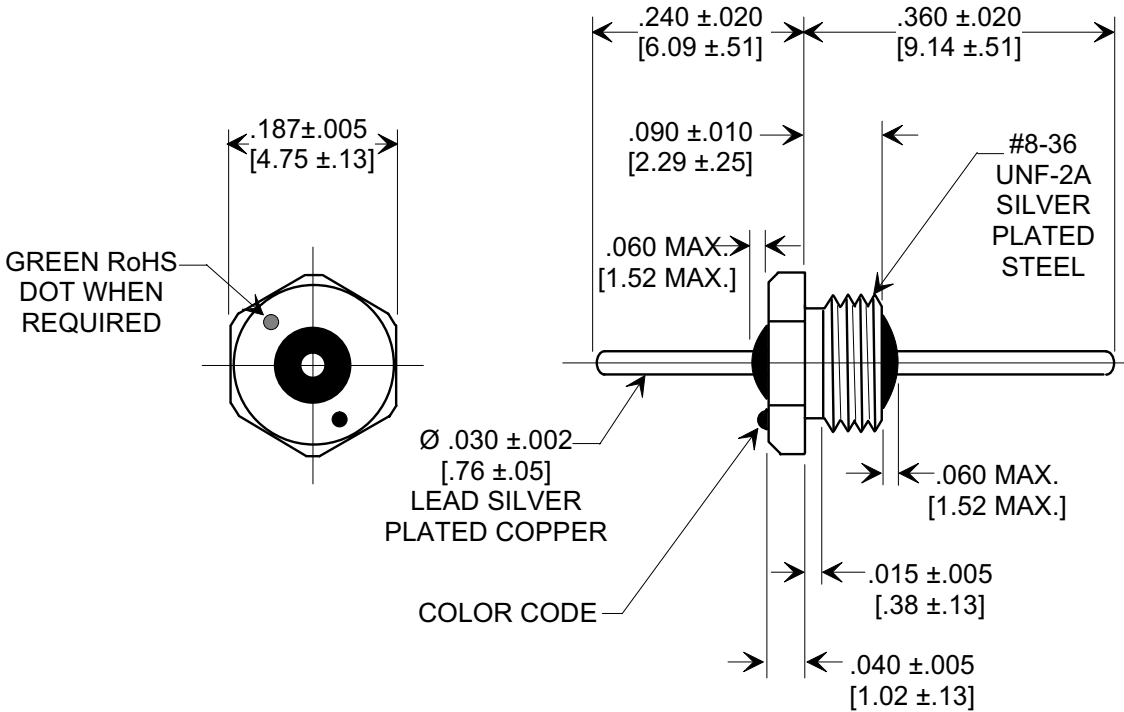

**MOUNTING HARDWARE**

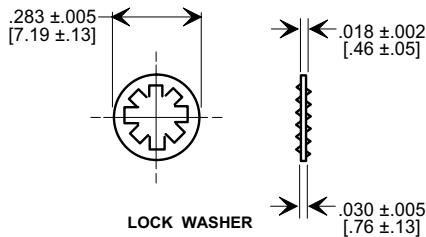

**NOTES:**

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. RECOMMENDED MOUNTING TORQUE: 1.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C. SEE INSTALLATION RECOMMENDATIONS.
5. LOCK WASHER INCLUDED.
6. TUSONIX STANDARD PART NUMBER: 4401-680.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4401-680 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
7. PART MARKING: STANDARD PART: COLOR CODE AS SPECIFIED.  
RoHS PART: ADDITIONAL GREEN DOT IDENTIFIER.

5	MAX.	300	200	10	----	----	----	----	BLK-BLK
CAP. (pF)	TOL.	85° C		DC CURRENT (AMPS)	10 MHz	100 MHz	1 GHz	10 GHz	COLOR CODE
		DC WORKING VOLTAGE			MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220				

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20010717-1-01 REMOVED STRAIGHTNESS. S.M. 12-18-01 20011210-2-10 ADDED & REVISED NOTES. S.M. 03-13-06 20060214-3-02	--TOLERANCES-- Unless Otherwise Specified		Title <b>BUSHING STYLE EMI FILTER</b>	
	DECIMAL ± NOTED		Drawn L.E. 07-17-01 Scale 4.5 X	
	ANGLES ±		Approved T.C. 07-17-01	
	<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b>	<b>4401-680</b>