


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

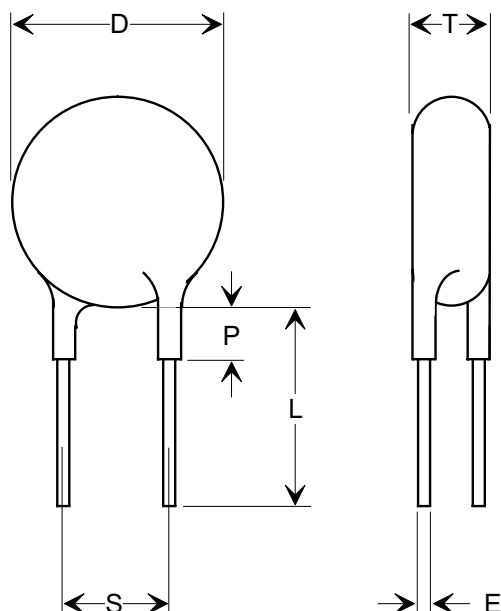

SPECIFICATIONS

TUSONIX PART NO.		0808-540-X7W0-352M
D (Diameter):		.360
T (Thickness):		.156
S (Lead Wire Spacing):		.250 ±.031
L (Lead Wire Length):		1.5 MIN.
E (Lead Wire Diameter):		.025 (22 AWG.)
P (Coating on Leads Max.):		.125 MAX.
Capacitance Value:		3500 pF
Capacitance Tolerance:		± 20%
Temperature Coefficient:		X7W
Voltage:	Working:	1 KVDC
	Test:	1750 VDC
	Life:	1500 VDC
Marking: TMK, CAP, TOL, TC		

NOTE:
PART TO BE DUREZ COATED,
NO WAX IMPREGNATION, WITH
A JET SEAL OVERCOAT.

REVISION RECORD	Original Release C.O.	0		--TOLERANCES-- Unless Otherwise Specified	Title DISC	
				DECIMAL ± 		
				ANGLES ± 	Drawn S.M. 10-06-97	
				TUSONIX TUCSON, ARIZONA	Approved J.Mc. 10-06-97	
					A	808-540-X7W0-352M