


## B07B035BC1 Product Details

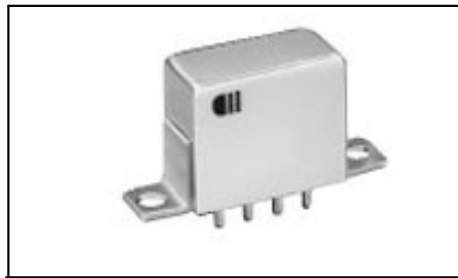

**B07B035BC1**  
(4-1617002-1)

TE Internal Number: 4-1617002-1

[Active](#)

### Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)

**Product Highlights:**

- 07 Full Size Relay Series
- Input Voltage = 26.5 VDC
- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Contact Current Rating = 10 Amps.
- Non Polarized, Monostable Coil Magnetic System

[View all Features](#)

### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Documentation & Additional Information	
<p><b>Product Drawings:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>Catalog Pages/Data Sheets:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">RELAY</a> (PDF, English)</li> </ul> <p><b>Product Specifications:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>Application Specifications:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>Instruction Sheets:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>CAD Files:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul>	<p><b>Additional Information:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Product Line Information</a></li> </ul> <p><b>Related Products:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Tooling</a></li> </ul>

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p><b>Product Type Features:</b></p> <ul style="list-style-type: none"> <li>• Termination Type = PC Pins</li> </ul> <p><b>Electrical Characteristics:</b></p> <ul style="list-style-type: none"> <li>• Input Voltage (VDC) = 26.5</li> <li>• Contact Current Rating (Amps.) = 10</li> <li>• Coil Polarity Protection Diode = Without</li> <li>• Transistor Driver = Without</li> <li>• Coil Resistance (?) = 300</li> <li>• MOSFET Driver = Without</li> <li>• Coil Power Measurement = Milliwatts</li> <li>• Coil Power, Nominal (mW) = 2341</li> <li>• Actuating System = DC</li> <li>• Shock = 50G's, 11ms</li> <li>• Vibration = 20G's, 10 to 2000Hz</li> </ul> <p><b>Body Related Features:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Series</a> = 07 Full Size Relay</li> </ul>	<p><b>Contact Related Features:</b></p> <ul style="list-style-type: none"> <li>• Mounting Options = PC Board</li> <li>• Enclosure = Hermetically Sealed</li> </ul> <p><b>Configuration Related Features:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Contact Arrangement</a> = 2 Form C, DPDT, 2 C/O</li> <li>• Coil Magnetic System = Non Polarized, Monostable</li> <li>• Coil Suppression Diode = Without</li> </ul> <p><b>Industry Standards:</b></p> <ul style="list-style-type: none"> <li>• Government/Industry Qualification = No</li> <li>• <a href="#">RoHS/ELV Compliance</a> = Not ELV/RoHS compliant</li> <li>• <a href="#">Lead Free Solder Processes</a> = Not suitable for lead free processing</li> </ul> <p><b>Conditions for Usage:</b></p> <ul style="list-style-type: none"> <li>• Temperature Range (?C) = -65 - +125</li> </ul> <p><b>Other:</b></p> <ul style="list-style-type: none"> <li>• Brand = CII</li> </ul>

### Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)