



Relays, Contactors & Switches > Relays > Signal Relays > Signal Relay, MT2 Standard, Axicom



Contact Voltage Rating: 220 VDC

Signal Relay Coil Power Rating (DC): 400 mW

Isolation (HF Parameter): -14.2dB @ 900MHz, -31.8dB @ 100MHz

Insertion Loss (HF Parameter): -.02dB @ 100MHz, -.97dB @ 900MHz

[All Signal Relay, MT2 Standard, Axicom \(0\)](#)

Features

Product Type Features

Relay Type	MT2 Relay
Relay Style	MT2 Relay
Product Type	Relay

Electrical Characteristics

Coil Power Rating Class	300 – 400 mW
Actuating System	DC
Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Short-Time Current	2 A
Insulation Initial Dielectric Between Contacts and Coil	1050 Vrms
Insulation Initial Dielectric Between Coil/Contact Class	1000 V – 1500 VA
Voltage Standing Wave Ration (HF Parameter)	1.03 @ 100MHz, 1.31 @ 900MHz
Insulation Initial Dielectric Between Adjacent Contacts	750 Vrms
Power Consumption	400 mW
Insulation Initial Resistance	1000 MΩ
Contact Limiting Making Current	2 A
Coil Resistance	360 Ω
Contact Limiting Continuous Current	2 A
Coil Type	Monostable



Contact Limiting Breaking Current	2 A
Contact Switching Load (Min)	10mA @ .02V
Contact Voltage Rating	220 VDC
Signal Relay Coil Power Rating (DC)	400 mW
Signal Relay Coil Voltage Rating	12 VDC
Signal Relay Contact Switching Voltage (Max)	220 VDC
Signal Relay Coil Magnetic System	Monostable, DC

Signal Characteristics

Isolation (HF Parameter)	-14.2dB @ 900MHz, -31.8dB @ 100MHz
Insertion Loss (HF Parameter)	-.02dB @ 100MHz, -.97dB @ 900MHz

Body Features

Weight	5 g[.1764 oz]
--------	---------------

Contact Features

Contact Plating Material	Gold
Contact Current Class	0 – 2 A
Contact Special Features	Bifurcated/Twin Contacts
Signal Relay Terminal Type	PCB-THT
Signal Relay Contact Current Rating	2 A
Signal Relay Contact Arrangement	2 Form C (2 CO)
Contact Material	Nickel-Titanium
Contact Number of Poles	2

Termination Features

Termination Type	Through Hole
------------------	--------------

Mechanical Attachment

Signal Relay Mounting Type	Printed Circuit Board
----------------------------	-----------------------

Dimensions

Width Class (Mechanical)	8 – 10 mm
Width	10 mm[.394 in]
Height	10.8 mm[.425 in]
Length Class (Mechanical)	20 – 25 mm
Height Class (Mechanical)	10 – 11 mm
Length	20.2 mm[.795 in]



Dimensions (L x W x H) (Approximate)	20.2 x 10 x 10.8 mm
--------------------------------------	---------------------

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C[185 °F]
Environmental Ambient Temperature Class	70 – 85°C
Operating Temperature Range	-55 – 85 °C

Operation/Application

Performance Type	Standard
------------------	----------

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 1393793-8
[V23105A5403A201](#)

Also in the Series


Customers Also Bought

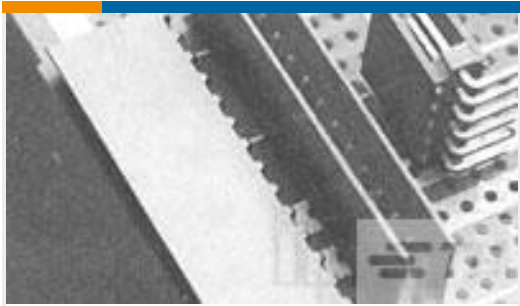

TE Part #281695-6
[HEADER HE14 STRAIGHT 6 P](#)

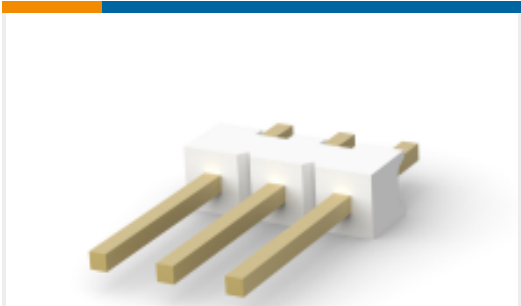


TE Part #3-644695-8
[Polyester Vertical PCB Header: 2.54 mm, Breakaway, MTA 100](#)

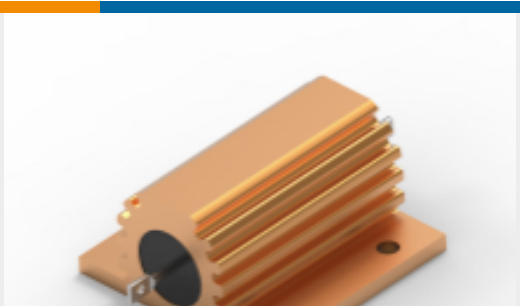

TE Part #9-1625971-3
[Power Resistors: Aluminum Housed, HSA](#)



TE Part #4-1879071-5
[THS50 330R 5%](#)

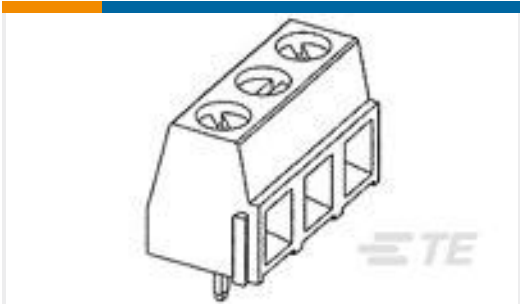

TE Part #282836-4
[TERMI-BLOK PCB MOUNT 90 4P.](#)



TE Part #1676249-2
[RN 0805 20K5 0.1% 10PPM 1KRL](#)



TE Part #1-1462000-8
[C93404=MT RELAY 150MW 48V](#)

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5-1462000-1_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1462000-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1462000-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



Transportation, Storage, Handling, Assembly and Testing of AXICOM THT Relays

English

MT2 Relay Datasheet

English

Product Specifications

Definitions General Purpose Relays

English