

HEADERS & RECEPTACLES





















PRODUCT DRAWING



3D PDF

MTA | MTA-100 3-640441-4

TE Internal Number: 3-640441-4 Alias ID: 1167642

TE CONNECTIVITY (TE)

Always EU RoHS/ELV Compliant

Centerline 2.54 mm [.1 in]

Number of Positions 4

Number of Rows 1

Contact Mating Area Plating Material Tin

Contact Mating Area Plating Material Finish Matte

04P MTA100 CONN ASSY WHT

Product Drawings

MTA-100 CONNECTOR ASSEMBLY, 24 AWG, STANDARD

PDF **English**

CAD Files

Customer View Model

3D STP.ZIP

Customer View Model

2D_DXF.ZIP English

Customer View Model

3D_IGS.ZIP **English**

3D PDF PDF English

Catalog Pages/Data Sheets

MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors

PDF **English**

Product Specifications

Application Specification MTA 100 Connector

English

Product Environmental Compliance

TE Material Declaration MD_3-640441-4_0525201238

PDF **English**


Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Product Type	Connector
	Connector Type	Connector Assembly
	Connector System	Wire-to-Post
	Wire/Cable Type	Discrete Wire, Stranded
	Strain Relief	With
	Sealed	No
	Connector Style	Receptacle
	Applies To	Wire/Cable
	Connector Design	Closed End
Configuration Features	Number of Positions	4
	Number of Rows	1
	Backwall/Post Interruptions	Without
Electrical Characteristics	Operating Voltage (VAC)	250
Body Features	Cable Exit Angle	90°
·		
Contact Features	Contact Mating Area Plating Material	Tin
	Contact Mating Area Plating Material Finish	Matte
	Contact Mating Area Plating Thickness	2.03 – 5.08 μm [80 – 200 μin]
	Underplate Material	Nickel
	Contact Termination Area Plating Thickness	2.03 – 5.08 μm [80 – 200 μin]
	Underplate Material Thickness	.762 μm, 30 μin
	Contact Termination Area Plating Material	Tin
	Contact Type	Socket
	Contact Current Rating (A)	5
	Contact Layout	Inline
	Contact Termination Area Plating Material Finish	Matte
	Contact Base Material	Copper Alloy
ermination Features	Termination Method to Wire/Cable	IDC
Mechanical Attachment	PCB Mount Alignment	Without
	e e e e e e e e e e e e e e e e e e e	
	Mating Retention	With

	Contact Retention	With
	Contact Retention Type	Locking Lance
	Mating Retention Type	Locking Ramp
	Panel Mount Retention	Without
	Mating Alignment	Without
Housing Features	Centerline	2.54 mm [.1 in]
	Housing Color	White
	Housing Style	Standard
	Housing Material	Nylon
Dimensions	Height	6.99 mm [.275 in]
	Wire/Cable Size (AWG)	24
	Wire/Cable Size (mm²)	.2
	Insulation Diameter	1.52 mm [.06 in]
	Length	10.16 mm [.4 in]
Usage Conditions	Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
Usage Conditions Operation/Application	Operating Temperature Range For Use With	-55 – 105 °C [-67 – 221 °F] MTA .100 Headers & MTA .100 IDC Posted Connectors
		MTA .100 Headers & MTA .100 IDC Posted
	For Use With	MTA .100 Headers & MTA .100 IDC Posted Connectors
Operation/Application	For Use With Pick and Place Cover	MTA .100 Headers & MTA .100 IDC Posted Connectors Without
Operation/Application	For Use With Pick and Place Cover UL Flammability Rating	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2
Operation/Application	For Use With Pick and Place Cover UL Flammability Rating UL File Number	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2 E28476
Operation/Application	For Use With Pick and Place Cover UL Flammability Rating UL File Number CSA Rating	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2 E28476 Certified
Operation/Application	For Use With Pick and Place Cover UL Flammability Rating UL File Number CSA Rating Agency/Standard	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2 E28476 Certified CSA, UL
Operation/Application	For Use With Pick and Place Cover UL Flammability Rating UL File Number CSA Rating Agency/Standard CSA File Number	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2 E28476 Certified CSA, UL LR7189
Operation/Application Industry Standards	For Use With Pick and Place Cover UL Flammability Rating UL File Number CSA Rating Agency/Standard CSA File Number UL Rating	MTA .100 Headers & MTA .100 IDC Posted Connectors Without UL 94V-2 E28476 Certified CSA, UL LR7189 Recognized

VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT

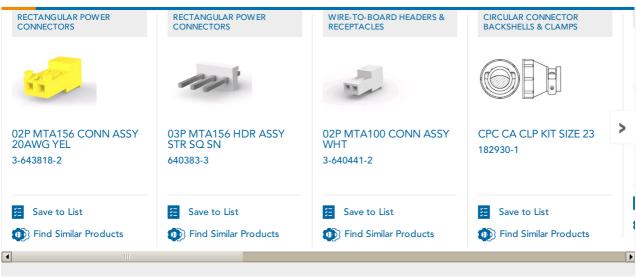





Connectors - W-T-B Headers & Receptacles MTA | MTA-100 O4P MTA100 SHRDED HDR ASSY SN - 2-644486-4
TE INTERNAL NUMBER: 2-644486-4

Always EU RoHS/ELV Compliant

Centerline **2.54 mm**Number of Positions **4**PCB Mounting Orientation **Vertical**PCB Mounting Style **Through**

Number of Rows 1

Hole

RELATIONSHIP

Mating Products Used to identify Mating Parts

See All Mating Products



PRODUCT - MATING PRODUCTS

MTA I MTA-100 04P MTA 100 SHRDED HDR ASY .235 - 647421-4 TE INTERNAL NUMBER: 647421-4

Connectors - W-T-B Headers & Receptacles

E INTERNAL NUMBER: 64/421

✓ Active

Not EU RoHS or ELV Compliant

Centerline 2.54 mm

Number of Positions 4

PCB Mounting Orientation

Vertical

PCB Mounting Style **Through**

Hole

Number of Rows ${\bf 1}$

RELATIONSHIP

Mating Products

Used to identify Mating Parts

See All Mating Products



PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTA | MTA-100

04P MTA100 PSTD **CONN ASSY LF**

- 3-647000-4 TE INTERNAL NUMBER: 3-647000-4



Always EU RoHS/ELV Compliant

Centerline 2.54 mm

Number of Positions 4

Number of Rows 1

Contact Mating Area Plating

Material **Tin**

Contact Mating Area Plating Material Finish Matte

