


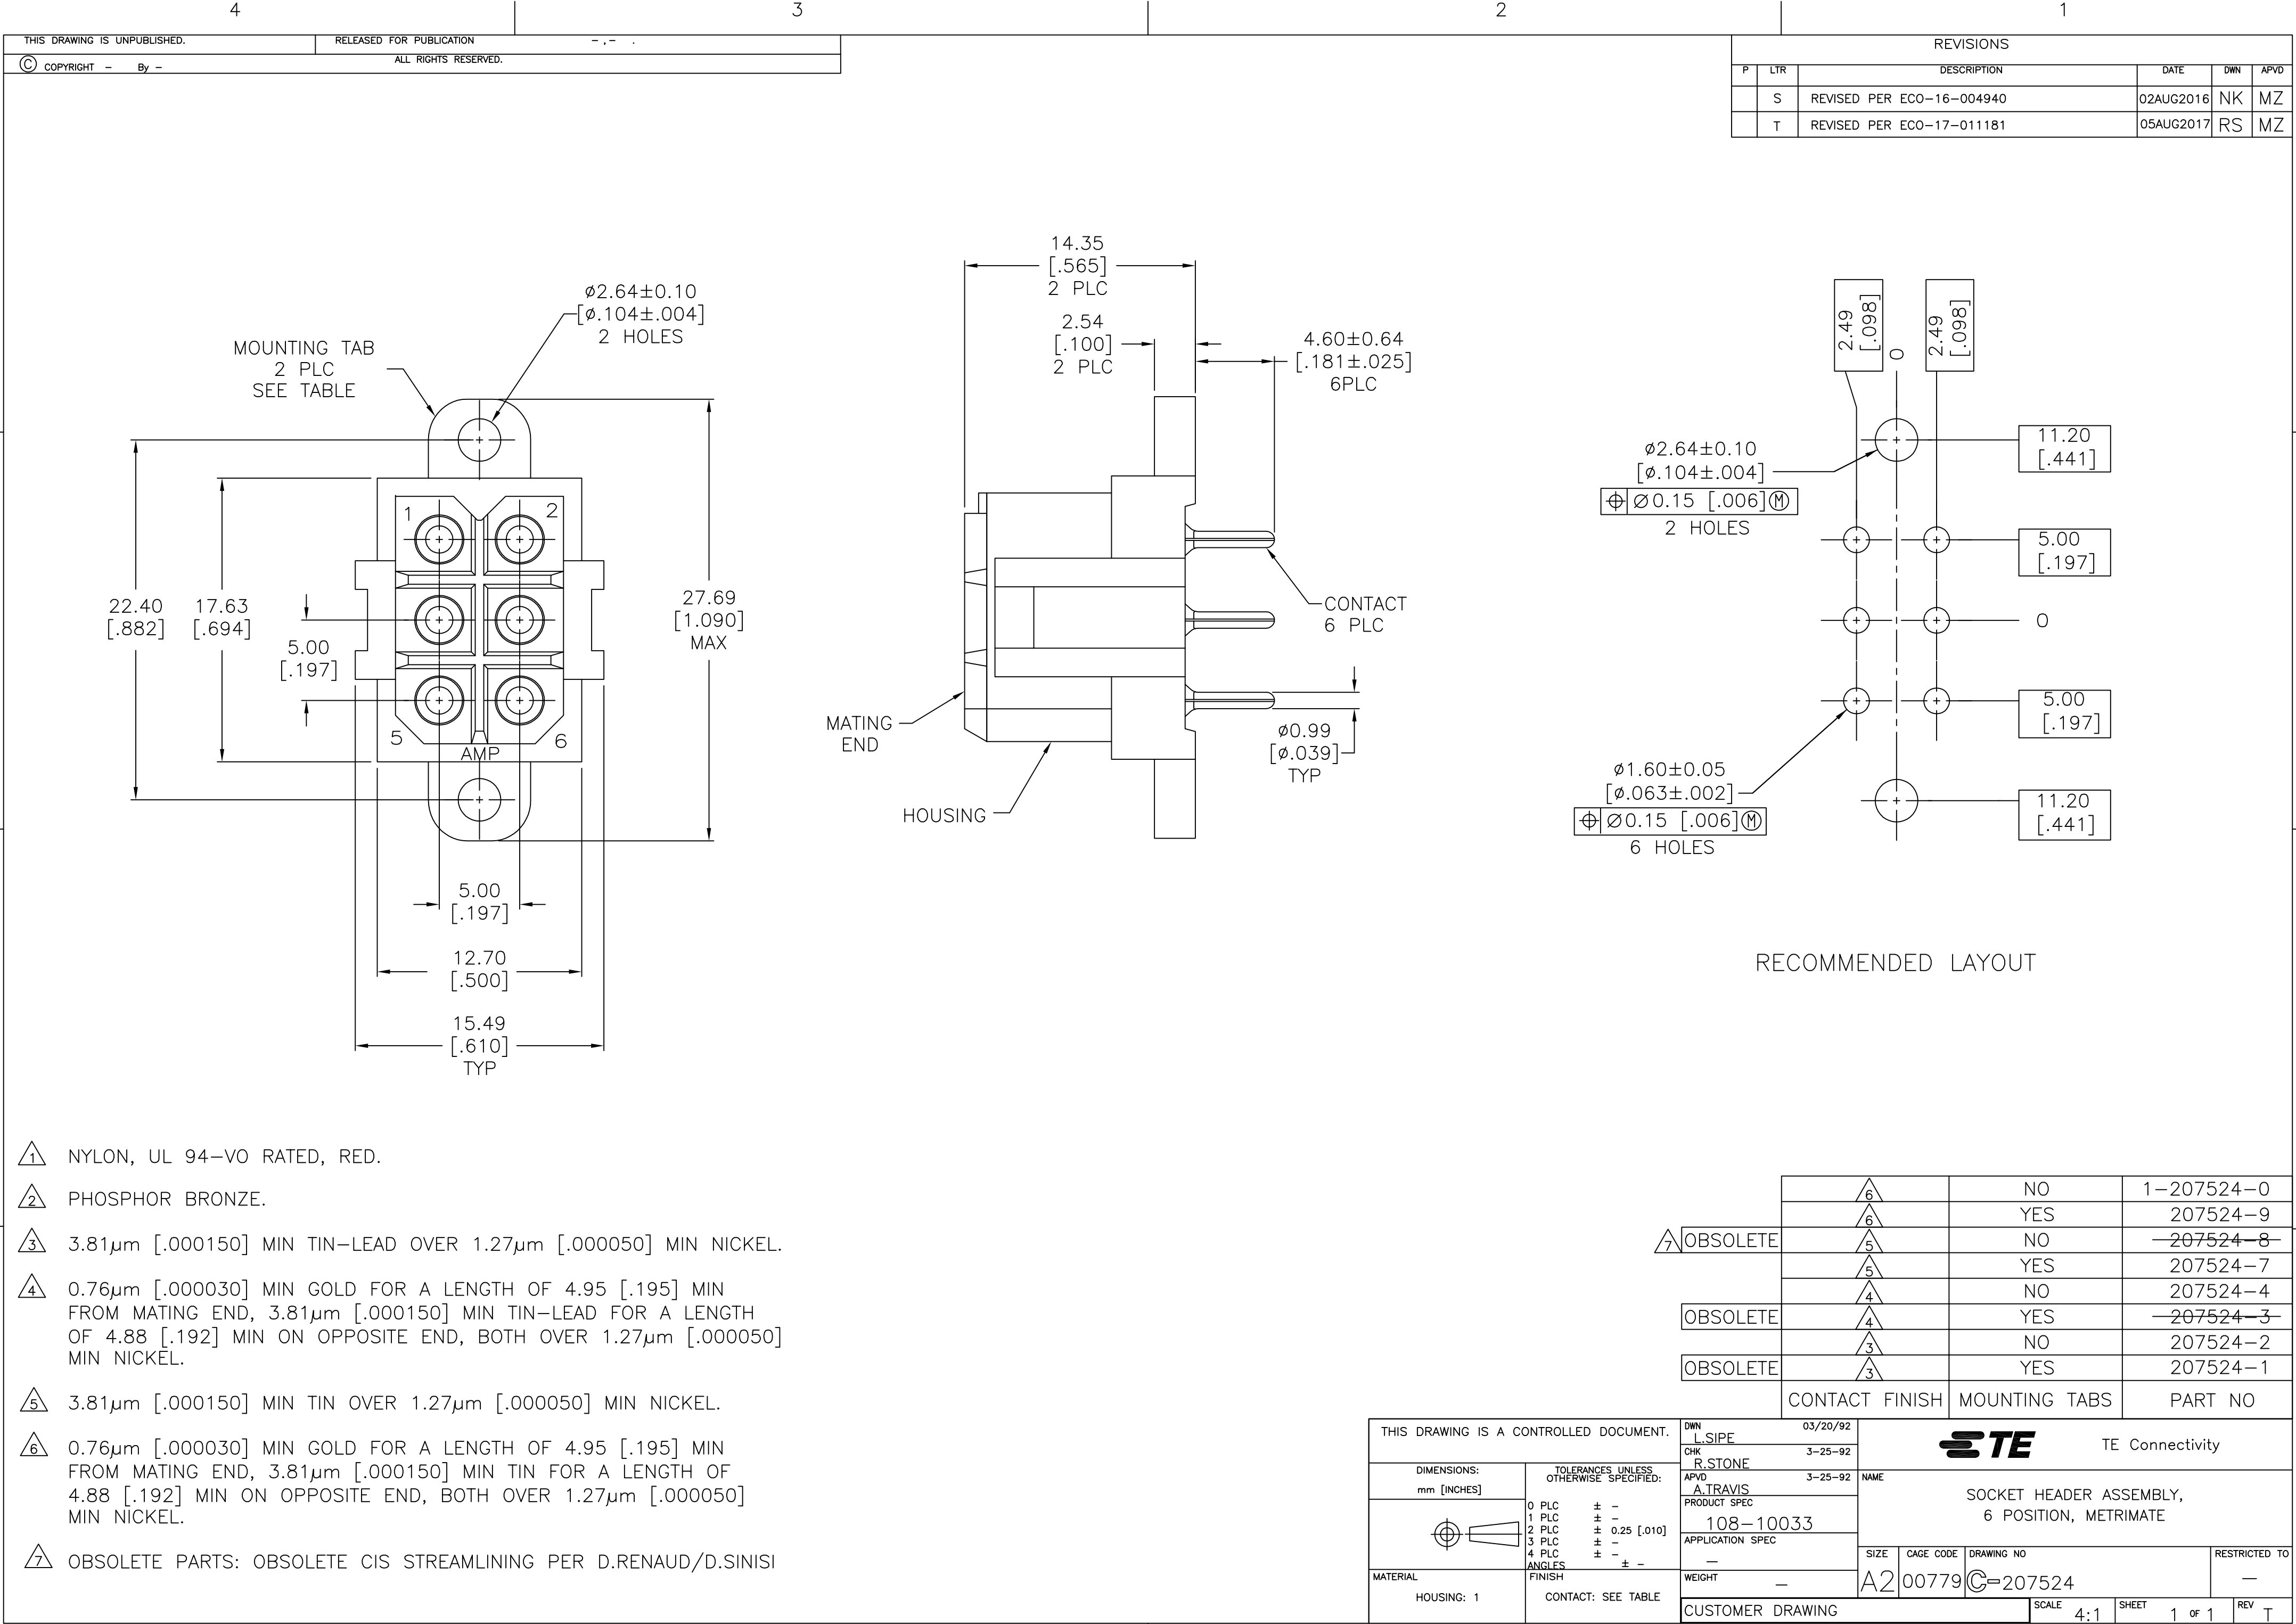

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
S		REVISED PER ECO-16-004940	02AUG2016	NK	MZ
T		REVISED PER ECO-17-011181	05AUG2017	RS	MZ

- 1 NYLON, UL 94-VO RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81 μ m [.000150] MIN TIN-LEAD OVER 1.27 μ m [.000050] MIN NICKEL.
- 4 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81 μ m [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
- 5 3.81 μ m [.000150] MIN TIN OVER 1.27 μ m [.000050] MIN NICKEL.
- 6 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81 μ m [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	6	NO	1-207524-0
	6	YES	207524-9
7 OBSOLETE	5	NO	-207524-8
	5	YES	207524-7
	4	NO	207524-4
OBSOLETE	4	YES	-207524-3
	3	NO	207524-2
OBSOLETE	3	YES	207524-1
CONTACT FINISH		MOUNTING TABS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/20/92	TE Connectivity	
		CHK	3-25-92		
		APVD	3-25-92		
		PRODUCT SPEC	108-10033		
		APPLICATION SPEC	-	SIZE	CAGE CODE
		WEIGHT	-	A2	00779
		CUSTOMER DRAWING	SCALE	4:1	SHEET
				1	of 1
				REV	T