



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-11-005027	11MAR11	RK	HMR
	C	REVISED PER ECO-16-006378	03NOV2016	RS	MZ

D

C



B

A

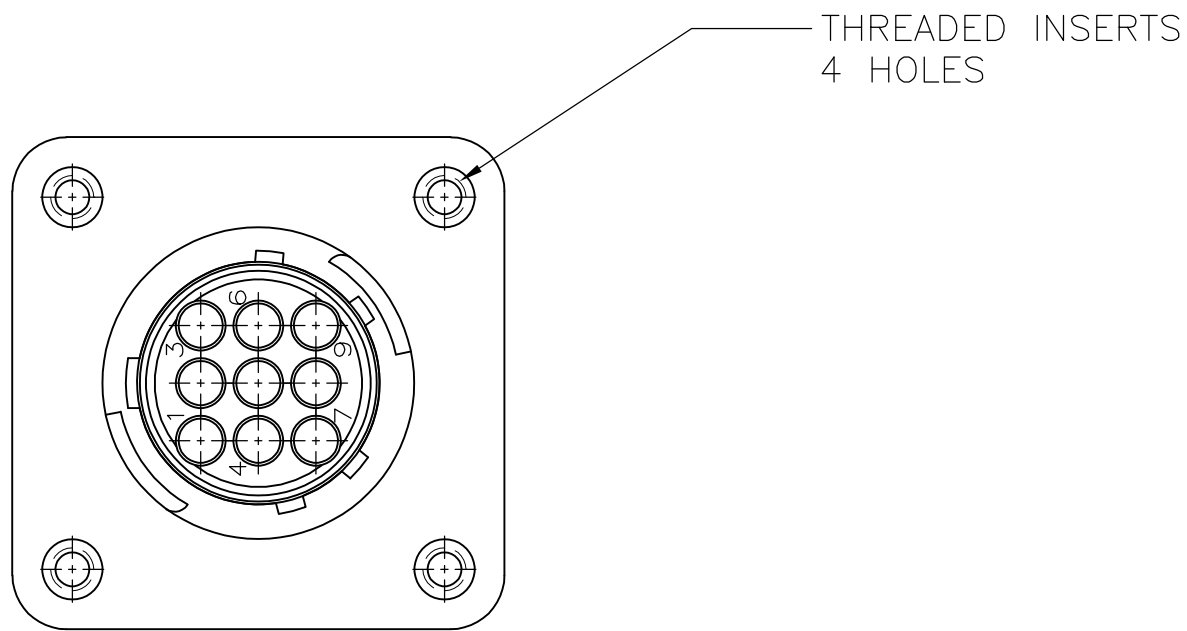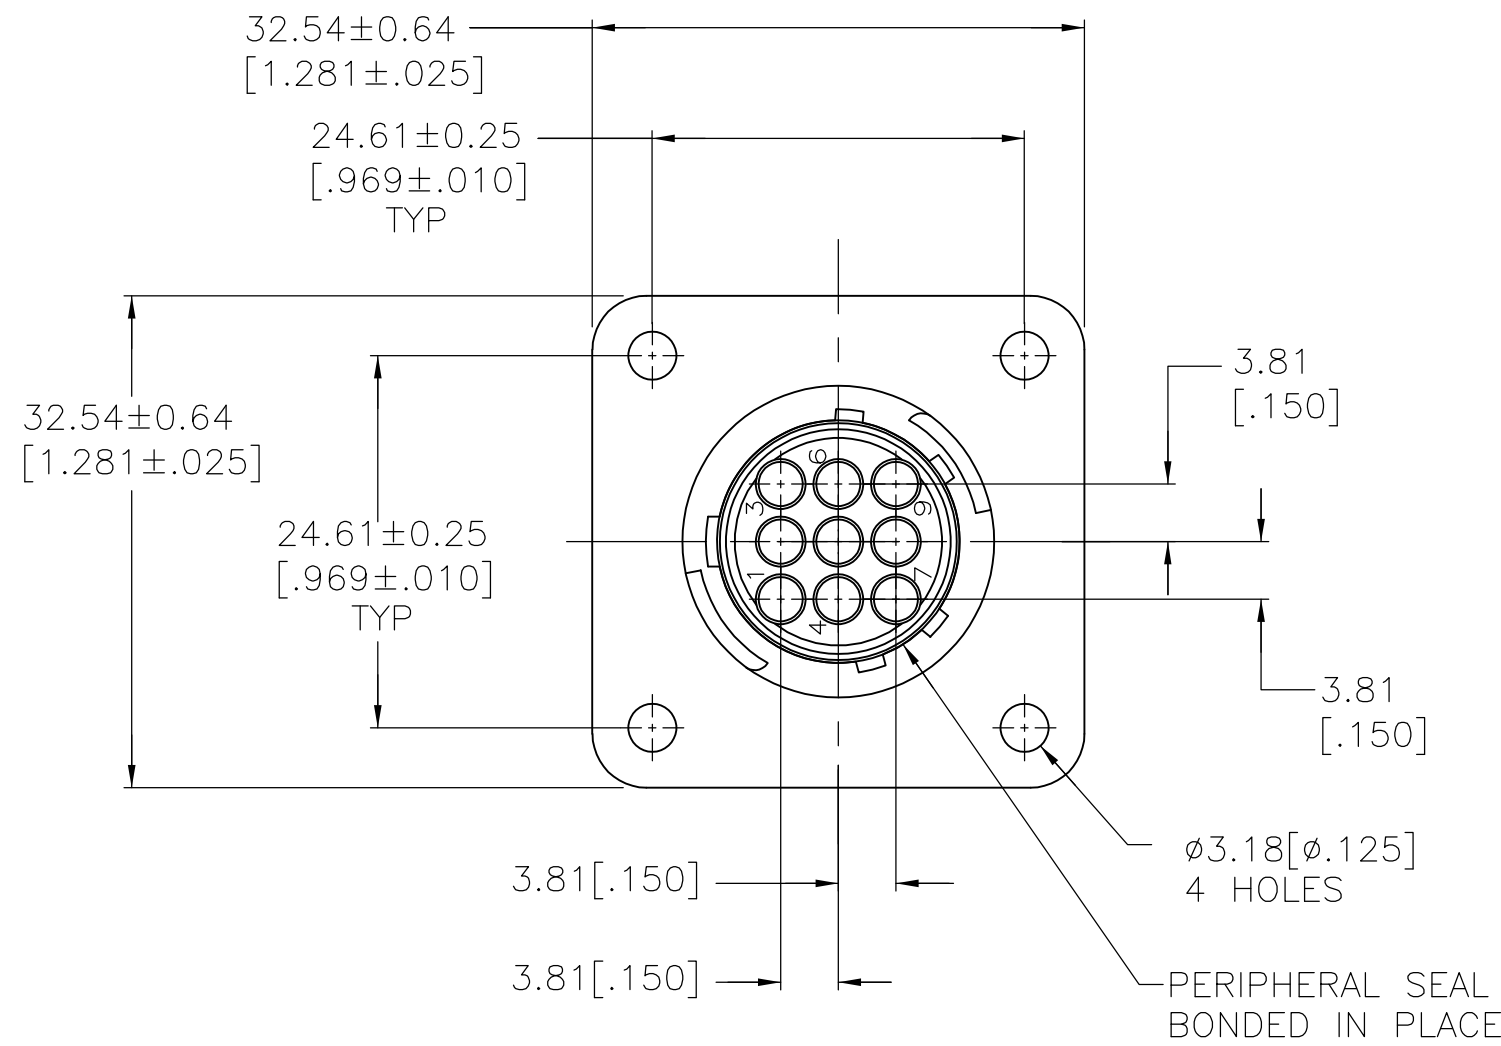

788158-3 ONLY

- 1 THIS PART WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- 2 HOUSING AND PRESSURE PLATE: NYLON, BLACK.
PERIPHERAL SEAL: ELASTOMER, GRAY.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.
THREADED INSERTS: BRASS.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

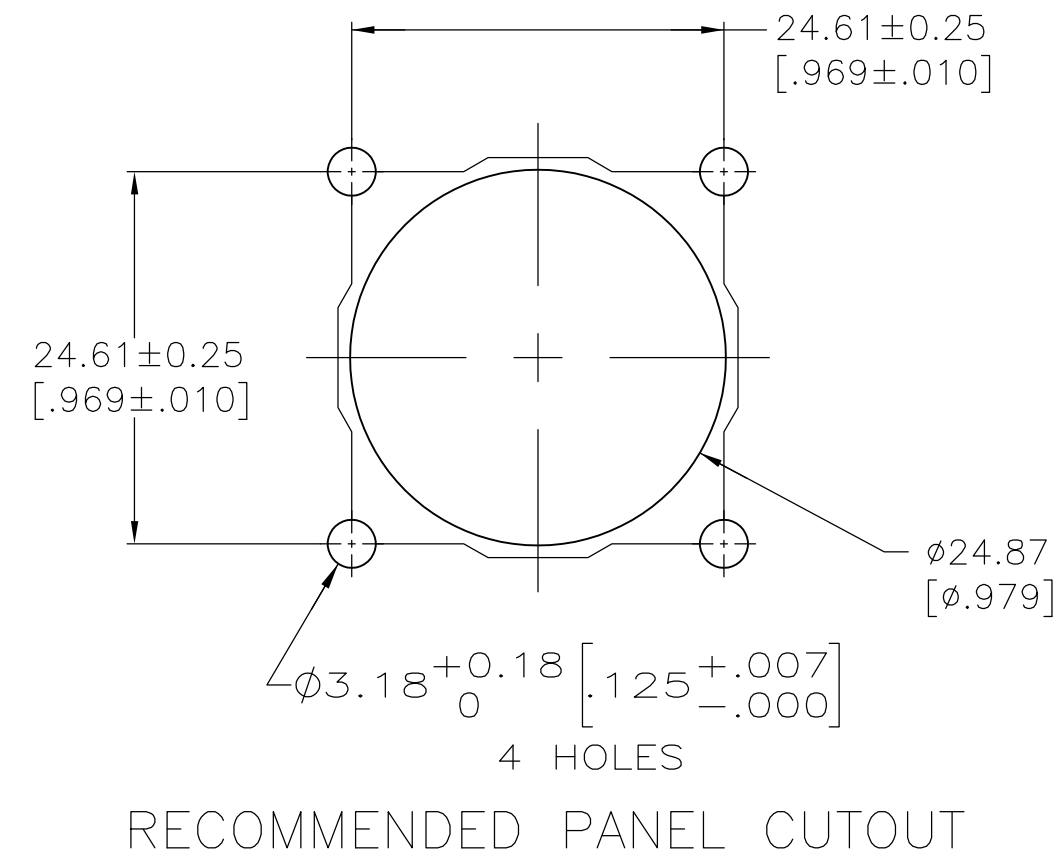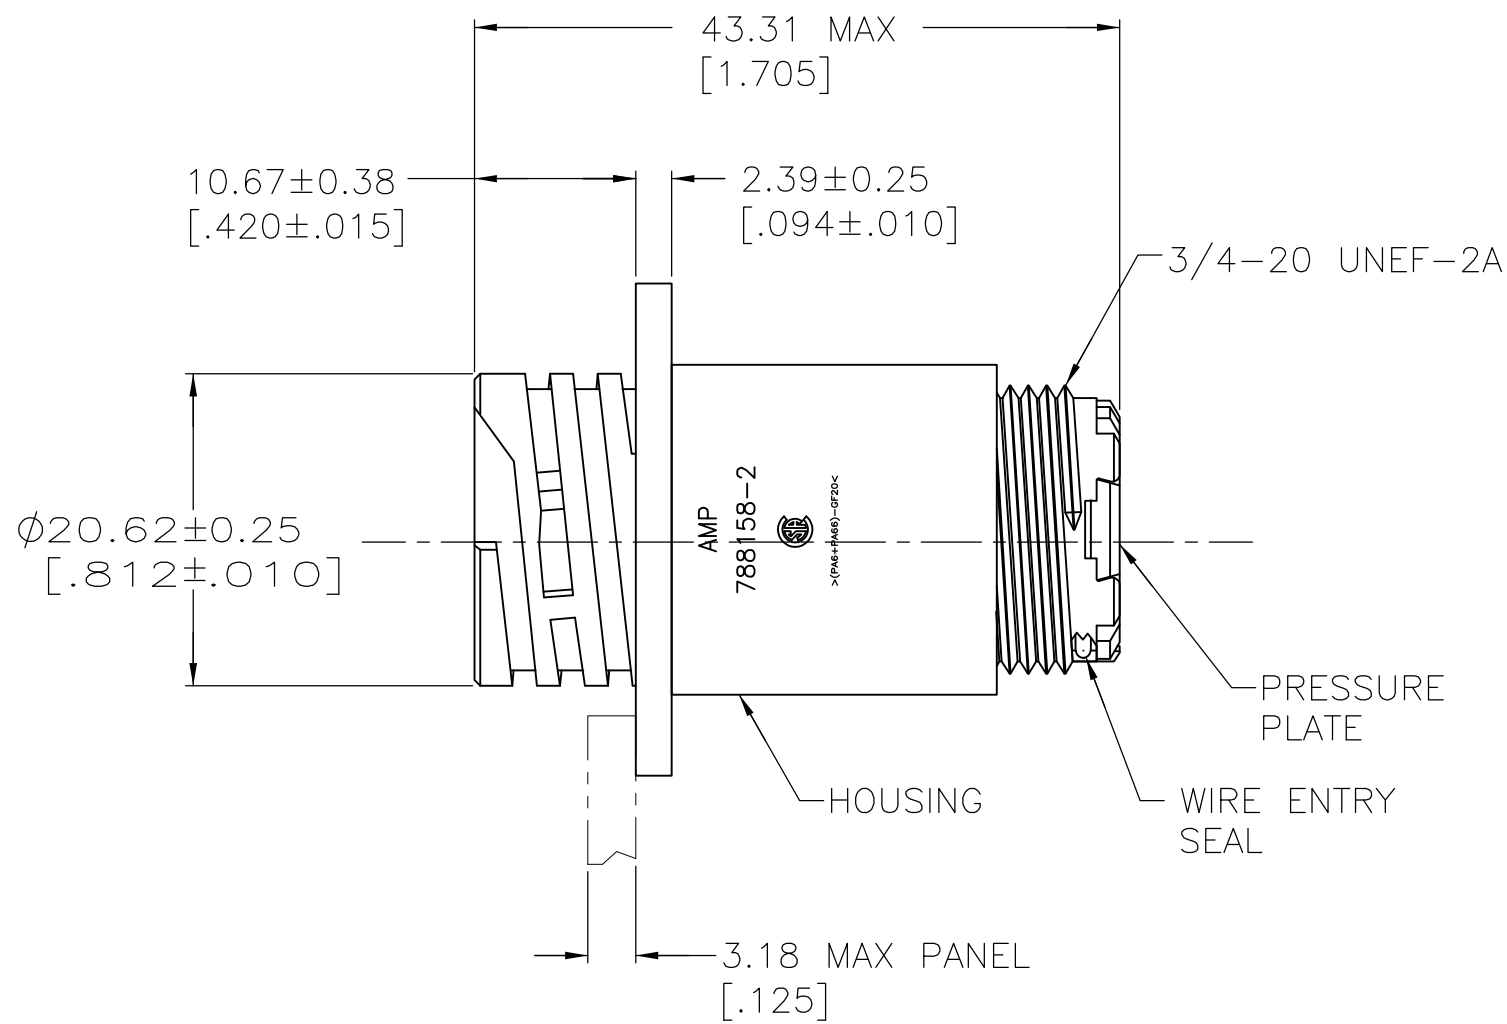

3 OBSOLETE	YES	.040-.080	SMALL	788158-3
	NO	.065-.100	STANDARD	788158-2
3 OBSOLETE	NO	.040-.080	SMALL	788158-1
THREADED INSERTS		WIRE INSULATION DIAMETER RANGE	INSULATION	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.DORWART 26 AUG 98	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK R.WALTER 26 AUG 98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.WALTER 26 AUG 98	NAME	
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± 0.13 [.005]		WEIGHT		
3 PLC ± -		CUSTOMER DRAWING	A2 00779 C=788158	
4 PLC ± -		SCALE 2:1		
ANGLES ± -		SHEET 1 OF 1	REV C	
FINISH -				