

TSAS-NR501-X-25MM

✓ ACTIVE

Raychem | Raychem TSAS

TE Internal #: 5670416002

Raychem TSAS, Heat Shrink Tubing, Clear, Single Wall Type, Adhesive, Non-Flame-Retardant, Reel, Operating Temperature Range -30 – 125 °C, Flexible

[View on TE.com >](#)



Heat Shrink Tubing



Primary Product Color: **Clear**

Wall Type: **Single**

Primary Product Material: **Adhesive**

Heat Shrink Tubing Flammability: **Non-Flame-Retardant**

Packaging Method: **Reel**

Features

Product Type Features

Wall Type	Single
-----------	--------

Body Features

Primary Product Color	Clear
Primary Product Material	Adhesive
Flexibility	Flexible

Dimensions

Cut Length	25 mm[.984 in]
------------	----------------

Usage Conditions

Heat Shrink Tubing Flammability	Non-Flame-Retardant
Operating Temperature Range	-30 – 125 °C

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

--	--



Packaging Method	Reel
------------------	------

Other

Product Source	Czech Republic
----------------	----------------

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | Raychem TSAS

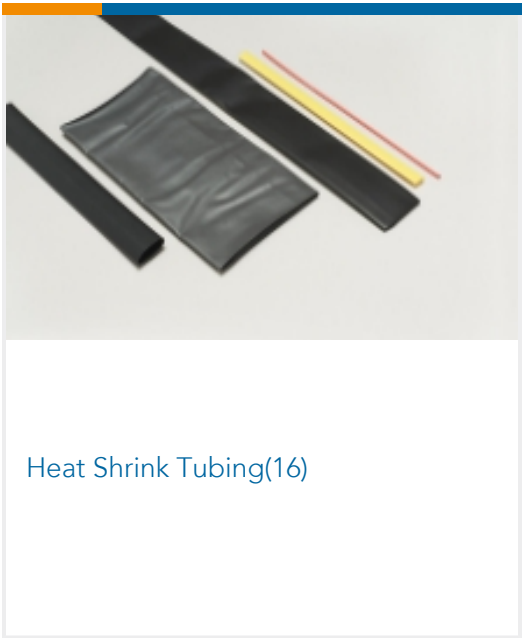

Customers Also Bought



TE Part #HD10-9-1939PE-P080
DEUTSCH HD10 HOUSINGS



TE Part #1011-233-0305
DEUTSCH DT BACKSHELLS




TE Part #1871413-1
AMPSEAL 16 HOUSINGS




TE Part #1123794-4
HIGH PIN COUNT HEADER



TE Part #1060-16-0644
DEUTSCH STAMPED & FORMED
CONTACTS

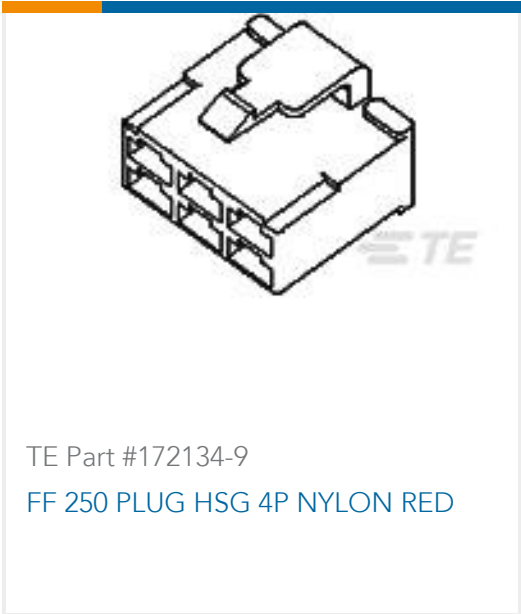

TE Part #172134-9
FF 250 PLUG HSG 4P NYLON RED

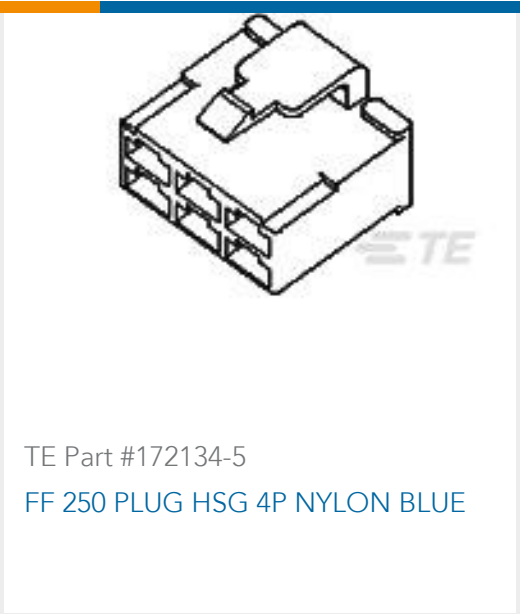

TE Part #172134-5
FF 250 PLUG HSG 4P NYLON BLUE

Documents

Product Drawings
TSAS-NR501-X-25MM

English

Datasheets & Catalog Pages
Application Tooling for Raychem Heat Shrink Product

English

Measuring_Single_Wall_Tubing

English

Selecting_Correct_Tubing

English

Product Specifications
Quality Specification

English

Product Environmental Compliance
Safety Datasheet

German

Safety Datasheet

English

Safety Datasheet

English

Safety Datasheet

Safety Datasheet

TSAS-NR501-X-25MM

Raychem TSAS, Heat Shrink Tubing, Clear, Single Wall Type, Adhesive, Non-Flame-Retardant, Reel, Operating Temperature Range -30 – 125 °C, Flexible



French

[Safety Datasheet](#)

[Safety Datasheet](#)

[Safety Datasheet](#)