
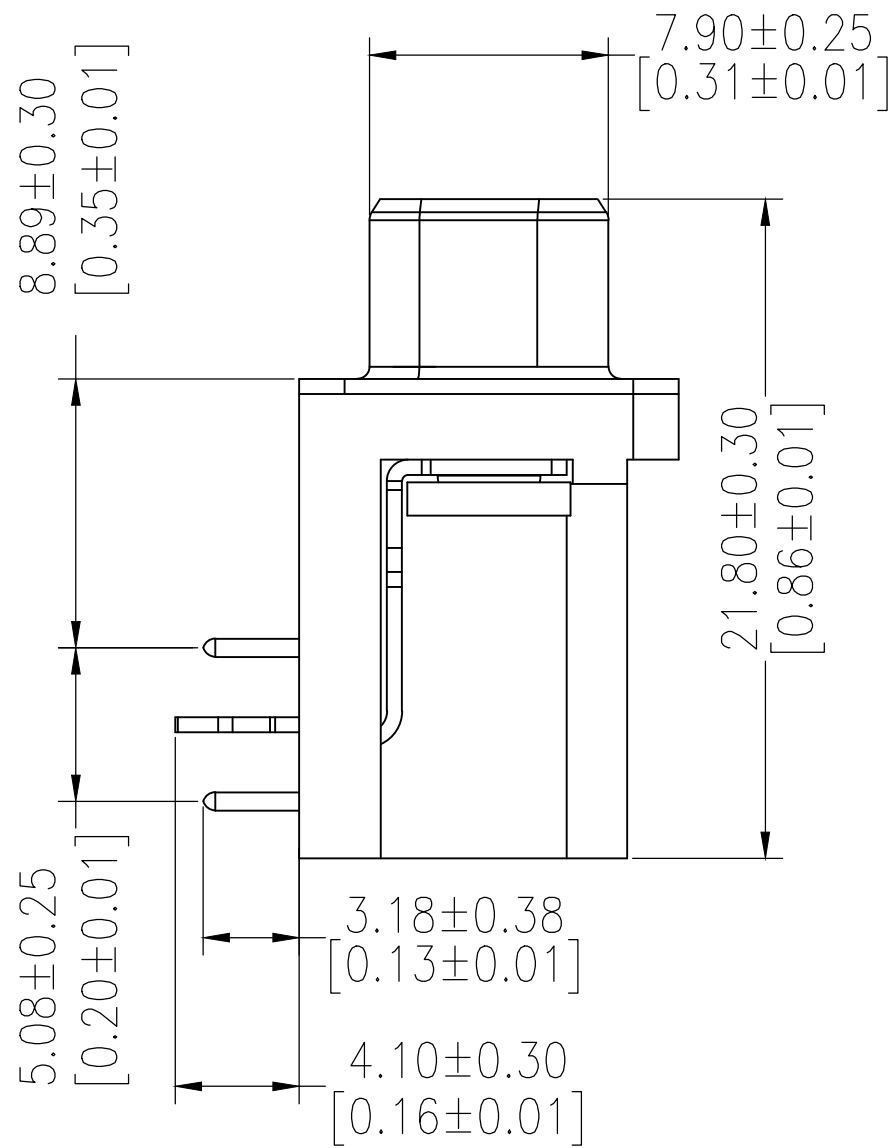
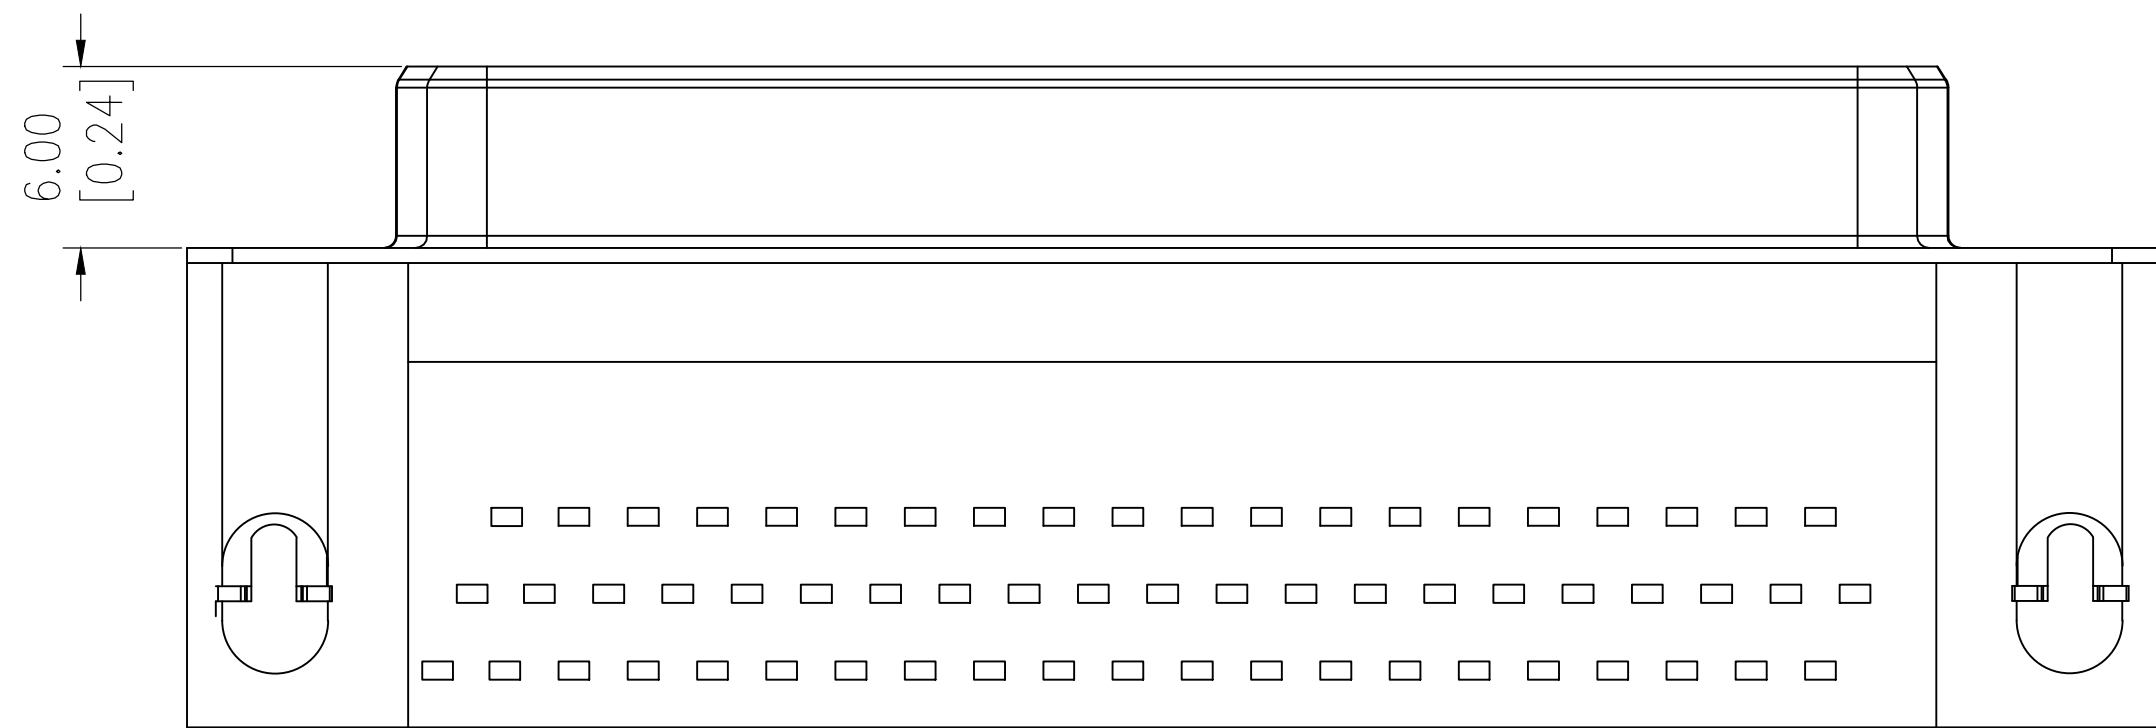


D


C

B

A

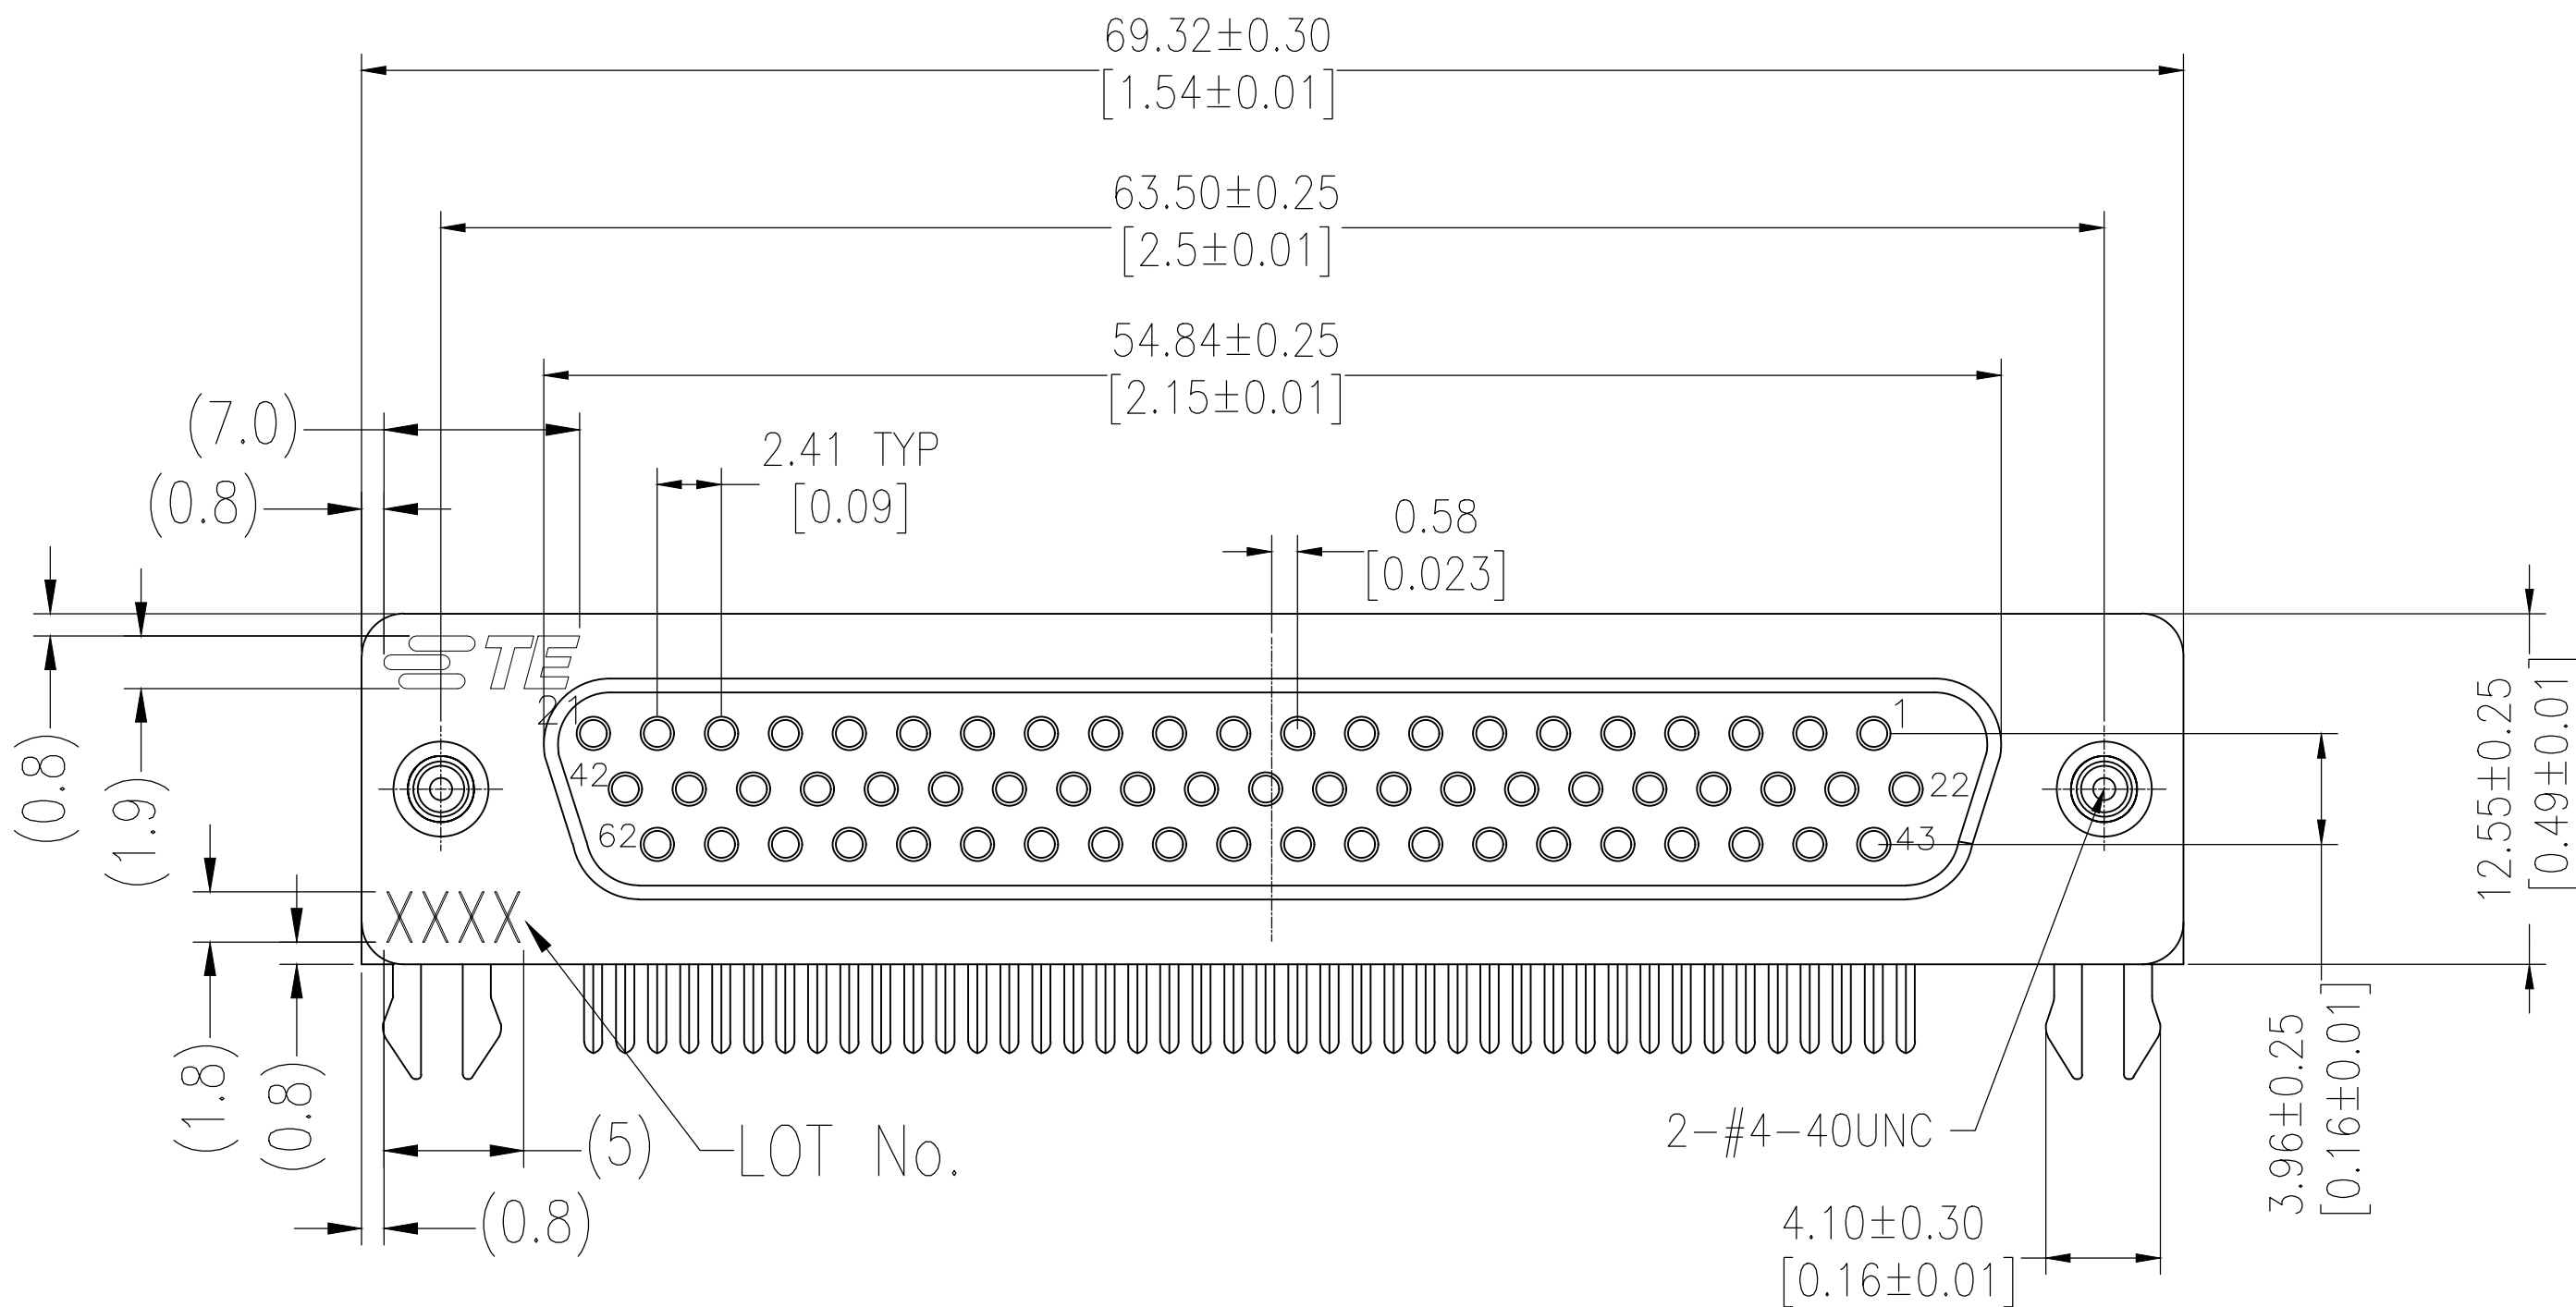

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

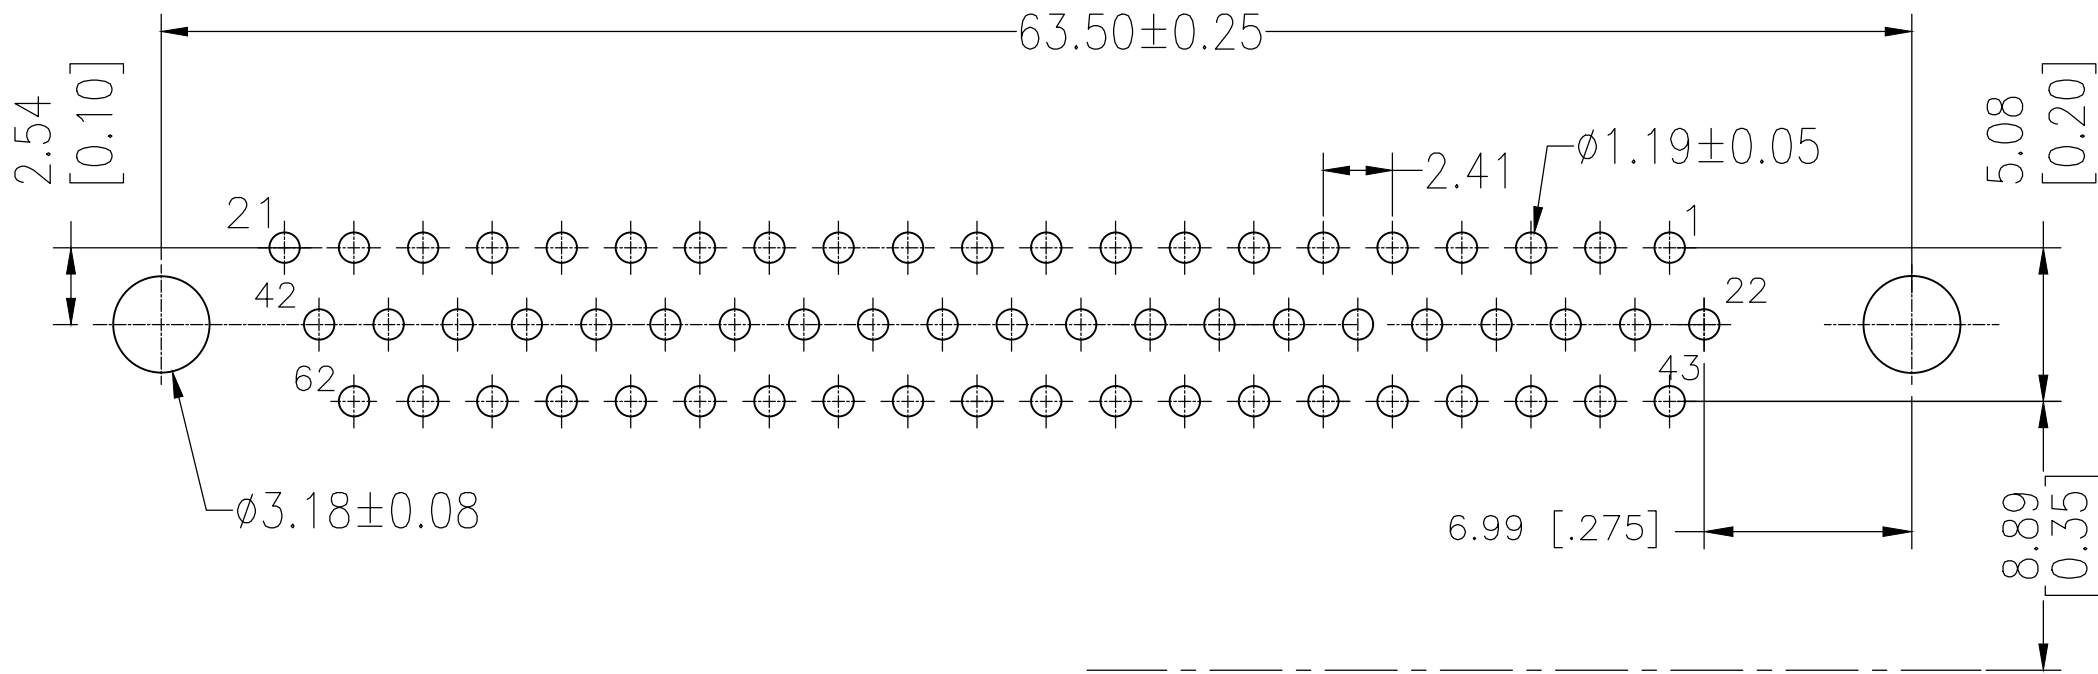

NOTES:
Rated Current:3.0AMP
Contact Resistance:30m Ω max
Withstand Voltage:500V AC
Insulation Resistance:1000M Ω min
Operation Temperature:-55 $^{\circ}$ C to +105 $^{\circ}$ C

Insulator:PBT+G.F UL94V-0 BLACK
Contact:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
Holddown:Brass,100u" TIN OVER 50u" NICKEL
Steel:Cold Roller Steel,Ni Plated
Rivetlock:Brass,Nickel Plated

LOT NUMBER "XXXX"
└─ Stands For Calendar Year
└─ Stands For Week Number

THREADED	30 μ "Au	2311771-1
TYPE	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 11MAR2017	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK DANIEL GORENC 11MAR2017	NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 62P	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DANIEL GORENC 11MAR2017	PRODUCT SPEC	
0. PLC ± -		APPLICATION SPEC		SIZE
1. PLC ± -		WEIGHT		CAGE CODE
2. PLC ± 0.25		CUSTOMER DRAWING		DRAWING NO
3. PLC ± -		SCALE 1:1		SHEET 1 OF 1
4. PLC ± -		REV C		REV
ANGLES				
FINISH				