


202D121-3-0

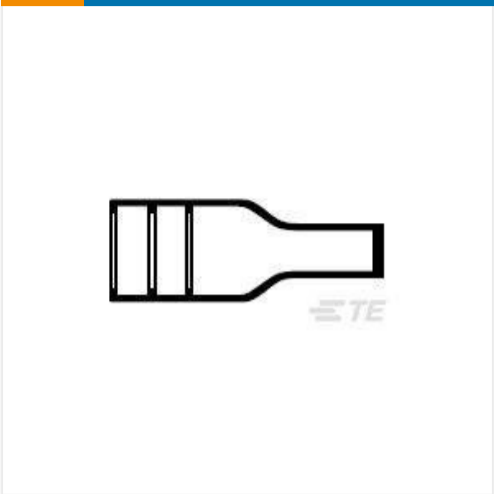

✓ ACTIVE
Raychem
 TE Part # **202D121-3-0**
 TE Internal #: **813355-000**
 Alias #: **9-1196327-3**

 Lipped : **Yes**
 Operating Temperature Range (°C): **-55 – 135**
 Fluid/Chemical Resistance : **Suitable for occasional exposure to fluids**
 Adhesive Options : **S1006 Separate Adhesive, -55°C – 135°C (-67°F – 275°F), S1017 Separate Adhesive, -20°C – 60°C (-4°F – 140°F), S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)**
 Material Systems Code : **10**

[Add to List](#) | [Order Samples](#) |

[Similar Products](#)

[Compatible Parts & Tooling](#)

We are here to help!
Get in touch with our product experts.

[CHAT WITH US](#)
[EMAIL US](#)
[CALL US](#)



Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features	Molded Part Type : Molded Boot
Configuration Features	Lipped : Yes
Body Features	Material Systems Code : 10 Adhesive Pre-Coat : No Entry Size (Solid or Fixed Adapter) : 4 – 6 Entry Size (Spin Coupling Adapter) : 4 – 10 Material : Modified Polyolefin
Dimensions	Cable Diameter Range : 5.6 – 12.4 mm [.22 – .488 in] Wire/Cable Outside Diameter : .236 in, .276 in, .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, 10 mm, 11 mm, 6 mm, 7 mm, 8 mm, 9 mm
Usage Conditions	Operating Temperature Range (°C): -55 – 135
Operation/Application	Power Cable Accessory : No
Industry Standards	Government Qualified : No Approved Standards : BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381