

08 MTE HDR SRST LATCH .100CL

✓ ACTIVE

AMPMODU | AMPMODU MTE


TE Part # 103638-7

TE Internal #: 103638-7

[View on TE.com >](#)



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Headers & Receptacles

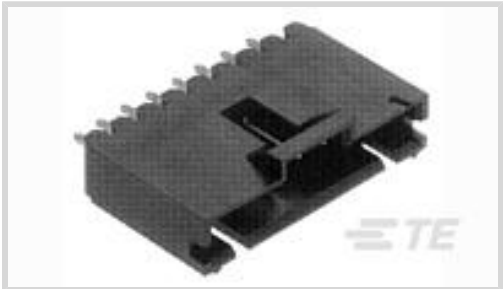

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Number of Positions: **8**

Centerline (Pitch): **2.54 mm [.1 in]**

Termination Method to Printed Circuit Board: **Through Hole**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Header Type	Shrouded
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	8
Number of Rows	1

Electrical Characteristics

Dielectric Withstanding Voltage	600 V
Termination Resistance	15 mΩ
Insulation Resistance	5000 MΩ

Contact Features

PCB Contact Termination Area Plating Material Thickness	2.54 μm[100 μin]
Mating Post Length	5.84 mm[.23 in]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape	Square
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Brass
Contact Mating Area Plating Material	Gold



	15 µin
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to Wire & Cable	Crimp, Insulation Displacement Crimp (IDC)
Termination Method to Printed Circuit Board	Through Hole

Mechanical Attachment

Strain Relief	Without
Mating Retention Type	Polarized Lock
Mating Alignment Type	Latched
Mating Alignment	With
Contact Retention Type	Locking Lance
PCB Mount Retention Type	Hold-Down
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	Without
Contact Retention	With

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Color	Black
Housing Material	Thermoplastic

Dimensions

Connector Length	22.86 mm[.9 in]
Connector Height	13.59 mm[.535 in]
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

Operating Temperature Range	-65 – 105 °C
-----------------------------	--------------

Industry Standards

Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

--	--



Packaging Quantity	24
Packaging Method	Tube, Tube/Box

Other

Comment	Use Keying Tool No. 91417-1 to remove post for keying.
---------	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Aktuelle ECHA Kandidatenliste: JAN 2019 (197) Kandidatenliste deklariert bezüglich: JAN 2019 (197)
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 487526-7
008 HOUSING FFC RCPT
100CL SR

Also in the Series | AMPMODU MTE

Multiple Configuration
PCB Headers &
Receptacles(7)

PCB Connector Shrouds
(40)

Ribbon Connector
Accessories(1)

Wire-to-Board Connector
Contacts(32)

Wire-to-Board Connector
Housings(594)

Wire-to-Board Headers &
Receptacles(730)

Customers Also Bought

TE Part #1-745967-4
25 RCPT SP/FMS SCRLK

TE Part #103638-3
04 MTE HDR SRST LATCH .
100CL

TE Part #5145246-1
CONNECTOR ASSEMBLY,
DUAL POSIT

TE Part #5-104071-5
25 SYSTEM 50 HDR SRST
SHRD SN

TE Part #102203-2
05 MODII HDR SRRA
SHRD .100CL


TE Part #103638-5
06 MTE HDR SRST LATCH .
100CL

TE Part #1-745968-4
25 PLUG SP/FMS SCRLK

TE Part #103638-8
09 MTE HDR SRST LATCH .
100CL



TE Part #2-747704-0
25 PLUG SP/FMS BRDLK

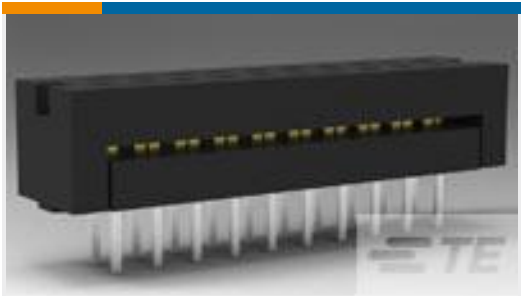

TE Part #746610-2
014 DIP PLUG 100CL TIN

Documents

Product Drawings

08 MTE HDR SRST LATCH .100CL

English

CAD Files

Customer View Model

ENG_CVM_CVM_103638-7_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_103638-7_R.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_103638-7_R.2d_dxf.zip

English

3D PDF

3D

Datasheets & Catalog Pages

AMPMODU MTE INTERCONNECT SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English

