
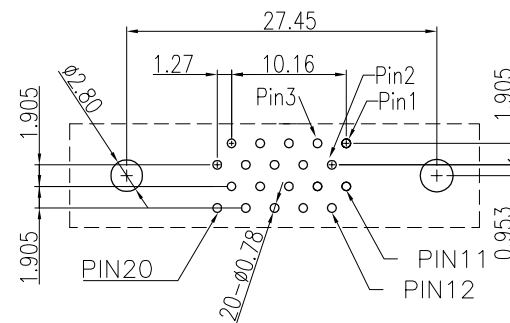
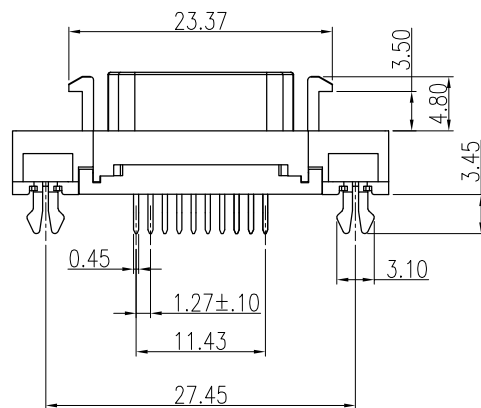


LOC	DIST	REV	DESCRIPTION	DATE	OWN	APVD
A1			ADD 26PIN P/N	14SEP2015	F.Y	X.X


NOTE:

- MATERIAL:
 - HOUSING:PBT UL94-V0, BLACK
 - SPACER:PBT UL94-V0, BLACK
 - CONTACT:PH/BR (C5191H) T=0.30
 - SHELL:ZINC ALLOY
 - HOOK:PH/BR(C5191-EH) T=0.40
- FINISH
 - CONTACT PLATING:
 - 50u" NICKEL PLATING OVERALL,
CONTACT AREA PLATED:GOLD 3u" OR 10u" OR 30u"
SOLDER AREA PLATED:TIN 100u" MIN. LEAD FREE
 - SHELL PLATING:
 - NICKEL 100u" MIN PLATED OVER Cu 150u" MIN
 - HOOK PLATING:
 - TIN 100u" MIN PLATED OVER NICKEL 50u" MIN
- VOLTAGE RATING:200V AC.
- CURRENT RATING:1A
- WITHSTANDING VOLTAGE:500V AC for 1 MINUTE.
- OPERATION TEMPERATURE:-55°C~+85°C
- PRODUCT MUST MEET CONTROLLED SUBSTANCES
PER TE SPEC 230-702, REVISION F

20	3u"	2-2271287-4
	30u"	2-2271287-2
	10u"	2-2271287-1
POS	CONTACT PLATING	P/N

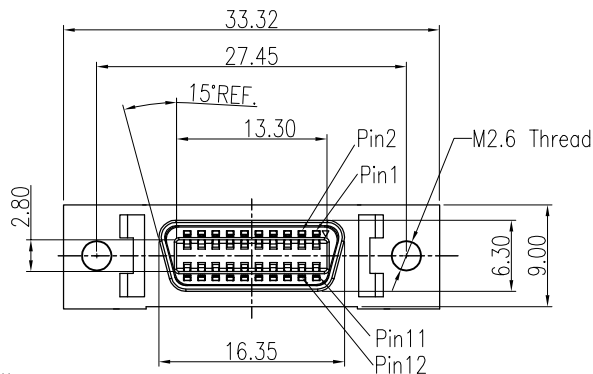

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

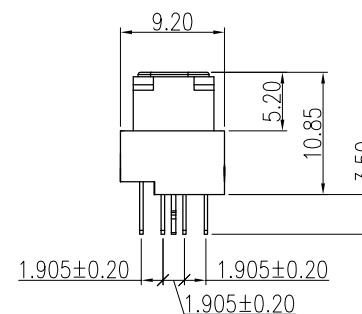



THIS DRAWING IS A CONTROLLED DOCUMENT.		FENCER YU 14-JAN-2015		TE Connectivity	
CHK KOBBY ZHAO 14-JAN-2015		APVD XU XIANG 14-JAN-2015		NAME	
PRODUCT SPEC		108-106126		1.27 PITCH VERTICAL TYPE SCSI RECEPTACLE WITH HOOK	
APPLICATION SPEC		—		RESTRICTED TO	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
SEE NOTES		—		A2 00779 C= 2271287	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC ± —		CUSTOMER DRAWING	
1 PLC ± 0.40		2 PLC ± 0.25		SCALE	
3 PLC ± —		4 PLC ± —		SHEET 1 of 3	
ANGLES		FINISH		REV A1	

REVISIONS				
LOC	DIST	P	LYR	DESCRIPTION
		A1		ADD 26PIN P/N
			DATE	OWN
			14SEP2015	F.Y
				X.X



NOTE:

- MATERIAL:
 - HOUSING:PBT UL94-V0, BLACK
 - SPACER:PBT UL94-V0, BLACK
 - CONTACT:PH/BR (C5191H) T=0.30
 - SHELL:ZINC ALLOY
 - HOOK:PH/BR(C5191-EH) T=0.40
- FINISH
 - CONTACT PLATING:
 - 50u" NICKEL PLATING OVERALL,
CONTACT AREA PLATED:GOLD 3u" OR 10u" OR 30u"
SOLDER AREA PLATED:TIN 100u" MIN. LEAD FREE
 - SHELL PLATING:
 - NICKEL 100u" MIN PLATED OVER Cu 150u" MIN
 - HOOK PLATING:
 - TIN 100u" MIN PLATED OVER NICKEL 50u" MIN
- VOLTAGE RATING:200V AC.
- CURRENT RATING:1A
- WITHSTANDING VOLTAGE:500V AC for 1 MINUTE.
- OPERATION TEMPERATURE:-55°C~+85°C
- PRODUCT MUST MEET CONTROLLED SUBSTANCES
PER TE SPEC 230-702, REVISION F

36	3u"	4-2271287-4
	30u"	4-2271287-2
	10u"	4-2271287-1
POS	CONTACT PLATING	P/N

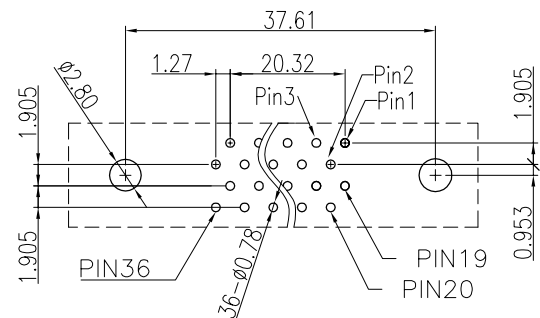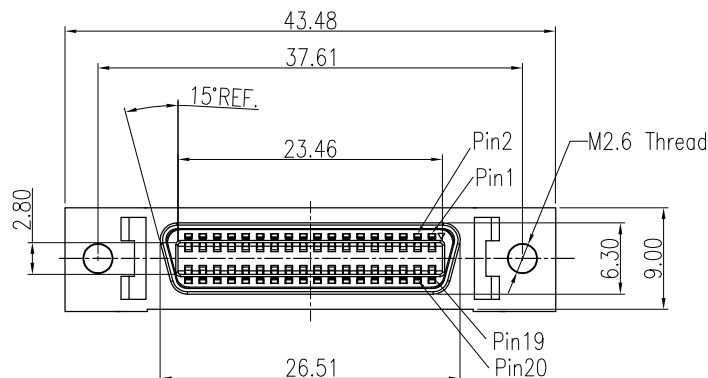

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

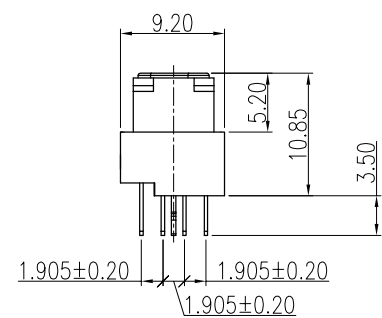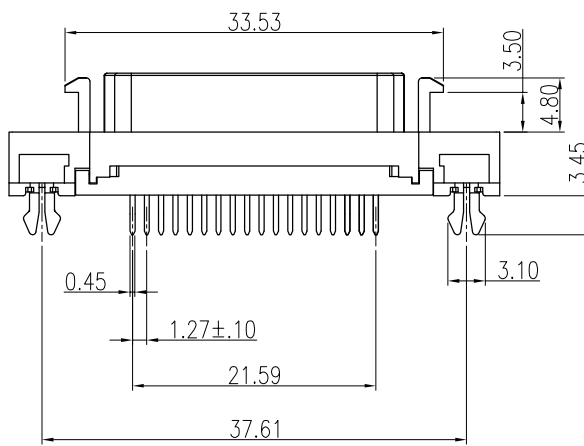

THIS DRAWING IS A CONTROLLED DOCUMENT.		FENCER YU 14-JAN-2015		TE Connectivity	
DIMENSIONS:		CHK KOBBY ZHAO 14-JAN-2015		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 14-JAN-2015		1.27 PITCH VERTICAL TYPE SCSI RECEPTACLE WITH HOOK	
MATERIAL		PRODUCT SPEC		SIZE	
SEE NOTES		APPLICATION SPEC		CAGE CODE	
		108-106126		DRAWING NO	
		WEIGHT		2271287	
		CUSTOMER DRAWING		RESTRICTED TO	
		SCALE		SHEET 2 of 3	
				REV A1	

1471-9 (3/11)