H103110150A-000 - ACTIVE


TE Internal #: H103110150A-000 1 Position Circular Power Connector, 1500 VDC, 95 mm² Wire, Bus Bar-to-Wire, Sealable, Bus Bar, Receptacle, Power, Black, All Plastic, 66 Nylon (GF)

View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors > Efficient Integration: HPC 350A Connector for BESS Applications





Number of Positions: 1

Operating Voltage: 1500 VDC

Wire Size: **95 mm²**

Connector System: Bus Bar-to-Wire

Sealable: Yes

All Efficient Integration: HPC 350A Connector for BESS Applications (12)

Features

Configuration Features

| Number of Positions | 1 |
|-----------------------------------|-----------------|
| Number of Power Positions | 1 |
| Number of Signal Positions | 0 |
| Electrical Characteristics | |
| Operating Voltage | 1500 VDC |
| Dimensions | |
| Wire Size | 95 mm² |
| Product Type Features | |
| Connector System | Bus Bar-to-Wire |
| Sealable | Yes |
| Connector & Contact Terminates To | Bus Bar |
| Connector & Housing Type | Receptacle |
| Circular Connector Shell Type | All Plastic |

S For support call+1 800 522 6752

H103110150A-000

1 Position Circular Power Connector, 1500 VDC, 95 mm² Wire, Bus Bar-to-Wire, Sealable, Bus Bar, Receptacle, Power, Black, All Plastic, 66 Nylon (GF)



Contact Features

| Contact Current Rating (Max) | 350 A |
|------------------------------|----------------------------|
| Contact Protection | With |
| Mechanical Attachment | |
| Connector Mounting Type | Panel Mount |
| Housing Features | |
| Housing Color | Black |
| Housing Material | 66 Nylon (GF) |
| Usage Conditions | |
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F] |
| Operation/Application | |
| Circuit Application | Power |
| Shielded | No |
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |

Packaging Features

| Packaging Method | Box & Tray |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Other | |
| EU RoHS Compliance | Compliant |
| EU ELV Compliance | Compliant |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |

C For support call+1 800 522 6752

H103110150A-000

1 Position Circular Power Connector, 1500 VDC, 95 mm² Wire, Bus Bar-to-Wire, Sealable, Bus Bar, Receptacle, Power, Black, All Plastic, 66 Nylon (GF)



Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts





Customers Also Bought



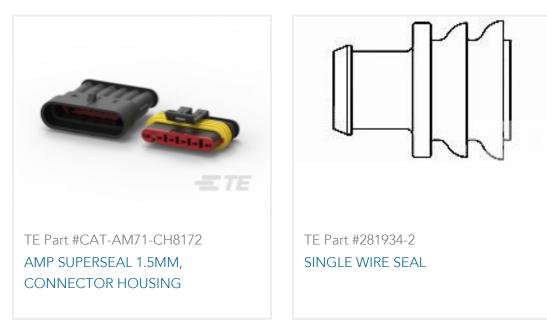

H103110150A-000

1 Position Circular Power Connector, 1500 VDC, 95 mm² Wire, Bus Bar-to-Wire, Sealable, Bus Bar, Receptacle, Power, Black, All Plastic, 66 Nylon (GF)



Documents

Product Drawings HPC-350-M-R-BK-01-A-W

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_H103110150A-000_A1.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_H103110150A-000_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_H103110150A-000_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages HPC 350A BESS Connector

English

HPC 350A BESS Connector

Product Specifications Application Specification

English

Application Specification

Agency Approvals UL

English