




Cable Assemblies > Automotive Cable Assemblies > Electric, Hybrid & Fuel Cell Cable Assemblies

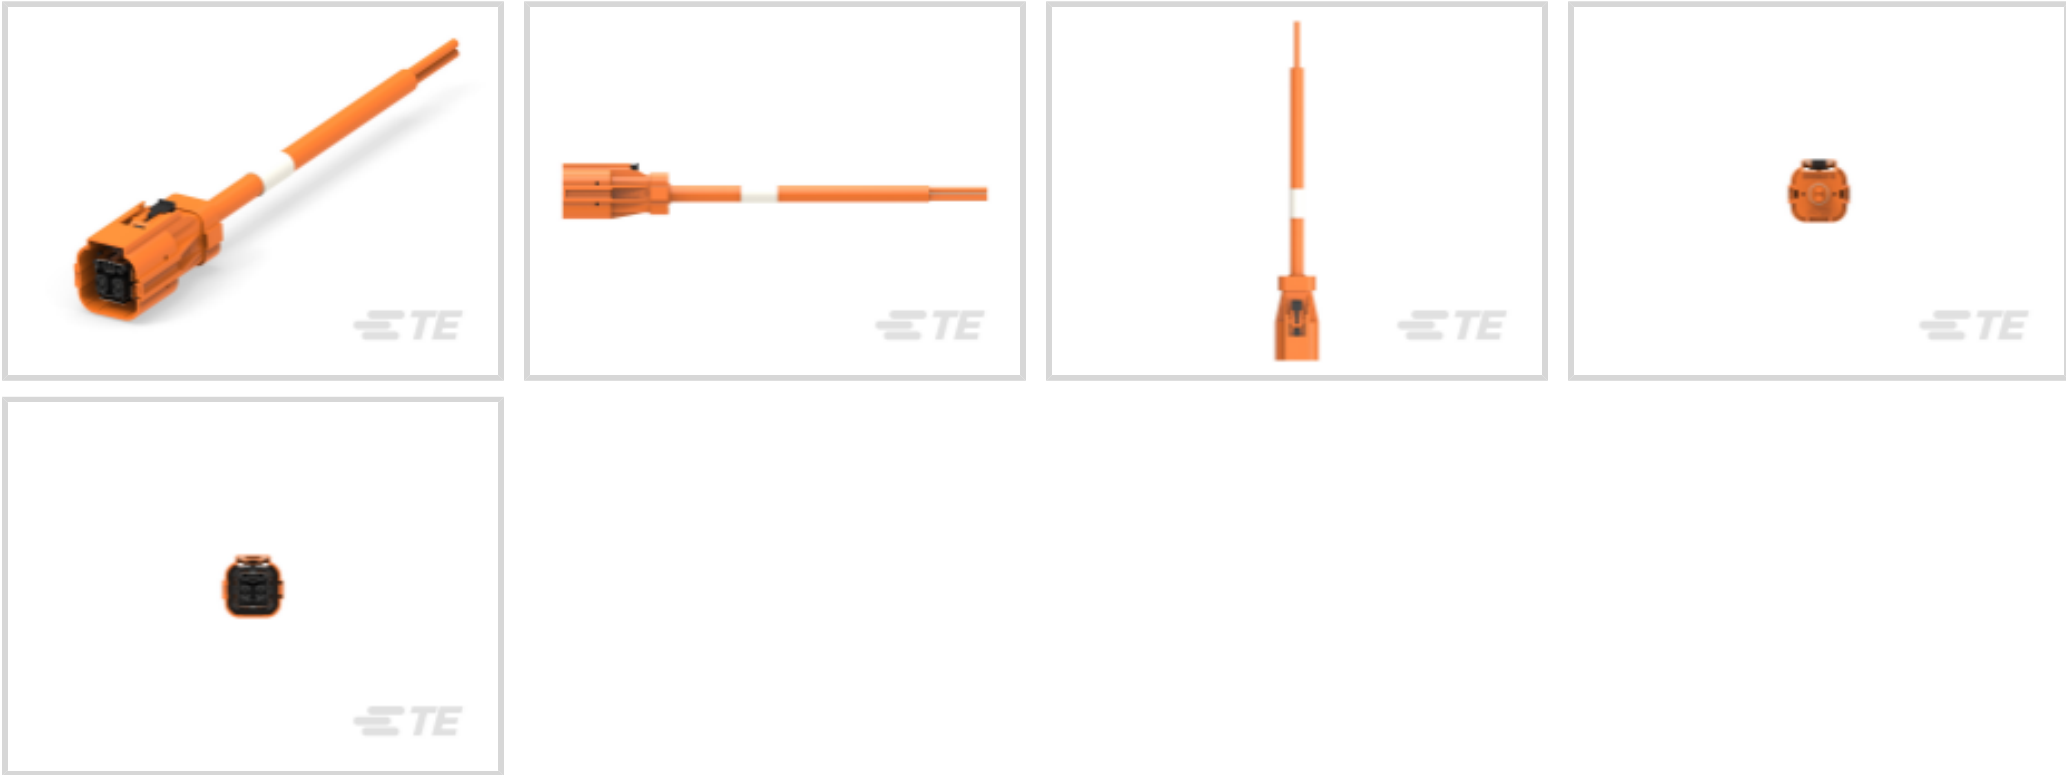

Cable Assembly Configuration: **Single Ended**
Operating Temperature Range: **-40 – 140 °C [40 – 284 °F]**
Cable Assembly Length: **3 m [9.84 ft]**

Features

Usage Conditions

Operating Temperature Range	-40 – 140 °C[40 – 284 °F]
-----------------------------	---------------------------

Other

Cable Assembly Configuration	Single Ended
Cable Assembly Length	3 m[9.84 ft]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2141265-3
COVER,SEAL

Also in the Series | HVA 630



Automotive Connector Caps & Covers
(10)



Automotive Connector EMC Shielding
(3)



Automotive Housings(17)



Connector Seals & Cavity Plugs(7)




Electric, Hybrid & Fuel Cell Cable
Assemblies(18)



High Voltage Wire Processing
Equipment(13)



Other Automotive Connector
Accessories(3)

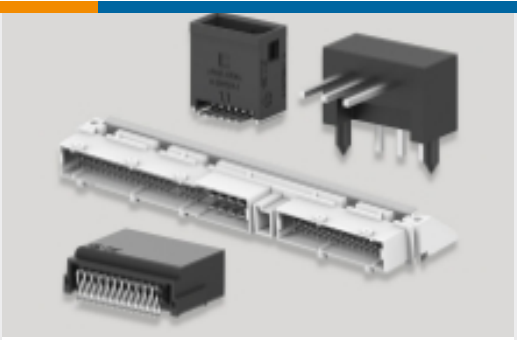

PCB Headers & Receptacles(2)

Customers Also Bought





TE Part #2-520401-2
ULTRA-FAST 187 ASY REC 22-18 TPBR



TE Part #U5254-000002-002BA
PRESS XDCR U5254-000002-002BA



TE Part #0462-201-20141
SOC, SOLID, SIZE 20, 20AWG, NI



TE Part #2389806-1
STRAIN RELIEF, 23 POSITION AMPSEAL



TE Part #770520-6
AMPSEAL, TERMINAL, TIN PLATE, 22-24AWG WIRE



TE Part #58529-1
PRO-CRIMPER III TOOL AMPSEAL



TE Part #55823-1
RBY PRO CRIMPER KIT



TE Part #2-2282265-5
5POS, HVA, 630, PIGTAIL, HYB ASSY

TE Part #2001140-03
PACKARD INTERFACE CONN/CBL 3'

Documents

Product Drawings

2POS,HVA,630-2PHM PIGTAIL,HYB ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2282289-3_J.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1-2282289-3_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2282289-3_J.3d_igs.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

1-2282289-3

9.84 ft [3 m], -40 – 140 °C [40 – 284 °F]



Product Specification

English