

#### Schaffner | Schaffner FN380

TE Internal #: 800268-SF

2 A, Unfiltered, 2 μA Leakage Current @ 250VAC, 50Hz, FASTON, PD2 Pollution Degree, IP40, UL 94V-2, Schaffner FN380, Inlet Filters

View on TE.com >



EMI & EMC Solutions > IEC Inlets > Inlet Filters > Power Entry Module with EMC Filter FN390, Versatile Filtered Power Entry Module











Filtering Requirements: Unfiltered

Current Rating (Max): 2A

Output Termination Type: FASTON

Pollution Degree: PD2

IP Rating: IP40

All Power Entry Module with EMC Filter FN390, Versatile Filtered Power Entry Module (44)

# Features

# **Product Type Features**

Level Of Filtering	Inductor & Capacitor
Filter Switch Type	DPST
Filtering Requirements	Unfiltered
Output Termination Type	FASTON

### **Configuration Features**

Fuse Options	Dual
Electrical Characteristics	
Inductance L1	2 μΗ
Capacitance Cx1	47
Overvoltage Category	II
Current Rating (Max)	2 A
Leakage Current (Max) (250VAC, 50Hz)	2 μΑ

### **Body Features**



Product Weight	70 g[2.46 oz]
Dimensions	
Product Width	50 mm[1.96 in]
Product Length	66.5 mm[2.61 in]
Product Height	58 mm[2.28 in]
Operation/Application	
Cooling Method	Natural Convection
Industry Standards	
Certified To	CSA 22.2 No. 8 1986, IEC/EN 60939, UL 1283
Pollution Degree	PD2
IP Rating	IP40
UL Flammability Rating	UL 94V-2

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.



# Compatible Parts






# Also in the Series | Schaffner FN380





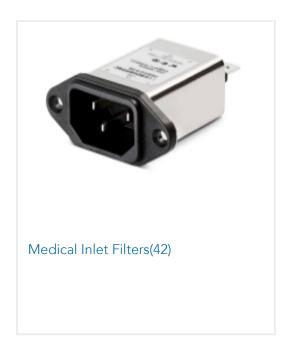

# **Documents**

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_800268-SF\_B.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_800268-SF\_B.3d\_igs.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_800268-SF\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages

IEC Inlet Filters FN380

English

### **Agency Approvals**

UKCA\_PEM-FN37x\_FN38x

English

2 A, Unfiltered, 2  $\mu$ A Leakage Current @ 250VAC, 50Hz, FASTON, PD2 Pollution Degree, IP40, UL 94V-2, Schaffner FN380, Inlet Filters

