


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECO-20-002238	7-22-20	CT	PD
	J	REVISED PER ECN-25-340098	26AUG2025	SP	JG

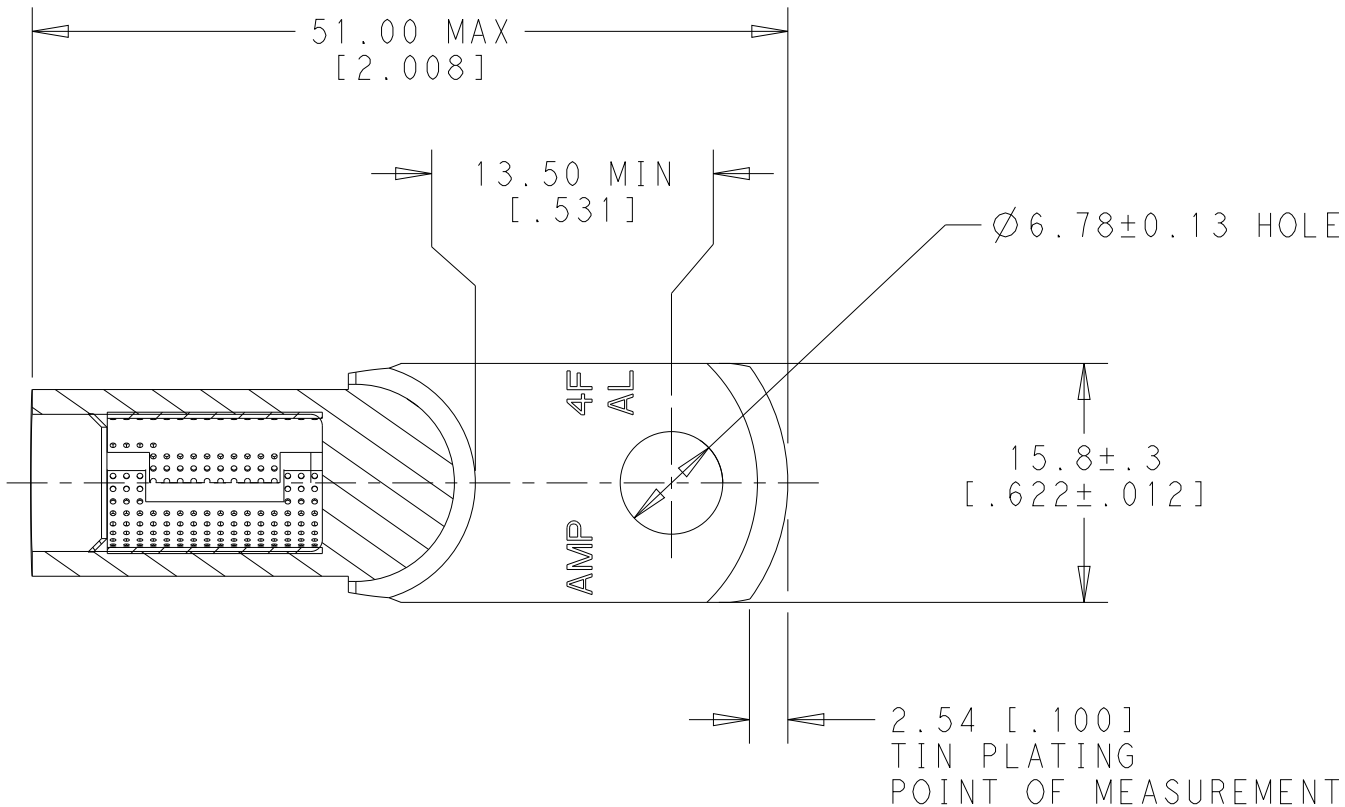


REFERENCE: 135148-2

BODY: COPPER ASTM-B187 ANNEALED
TIN PLATED 0.003[.000150] MIN THICK
PER ASTM B 545


INSERT AND FUNNEL: BRASS ASTM B36
NICKEL PLATED SAE AMS QQ-N-290A
DATED JULY 2000, .00254[.000100] MIN THICK

NOTES:

- 1) WIRE INSULATION: 7.01-7.75 [.276-.305]
- 2) WIRE CMA: 42331
- 3) THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.
- 4) WEIGHT: 21 GRAMS
- 5) SEE TE CONNECTIVITY INSTRUCTION SHEET 408-2281 FOR TOOLING AND CRIMP INSTRUCTIONS, FIGURE 2 FOR WIRE STRIPPING DETAIL.

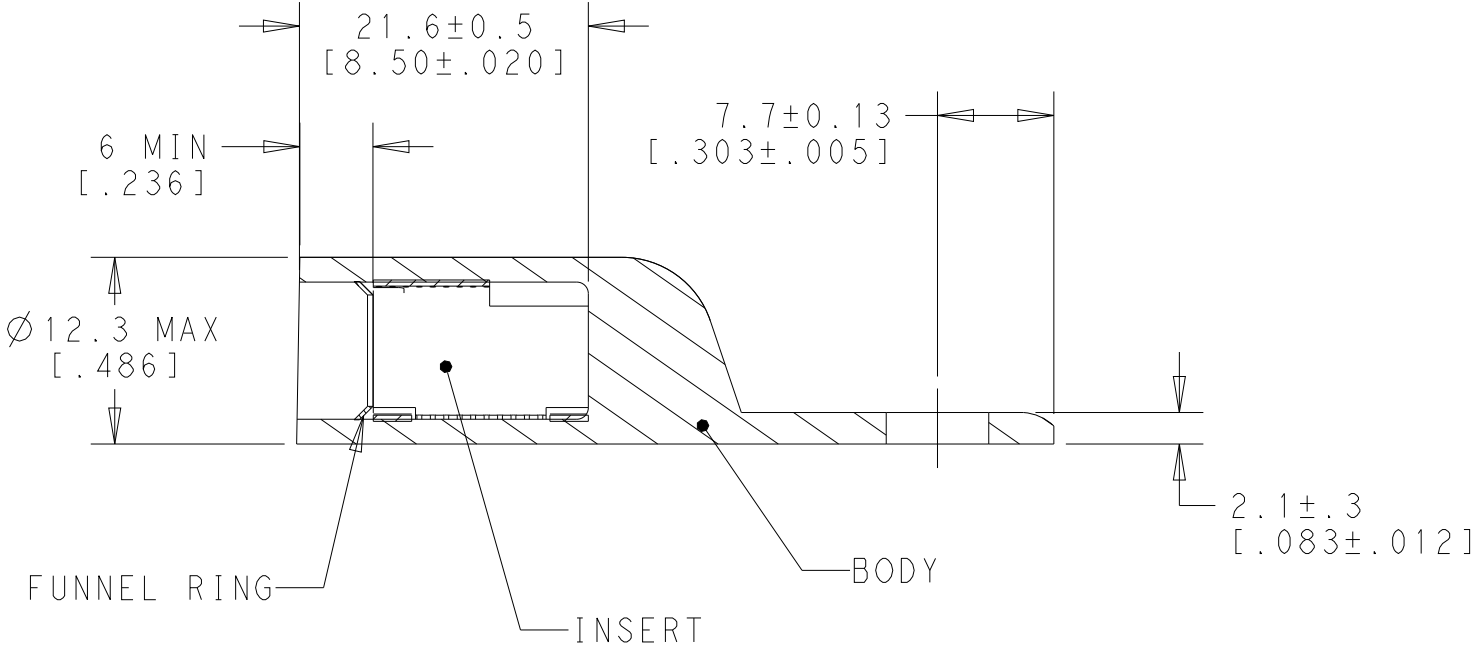

WARNING - THIS DOCUMENT CONTAINS TECHNOLOGY WHOSE EXPORT IS RESTRICTED BY THE EXPORT ADMINISTRATION REGULATIONS ("EAR") PURSUANT TO 15 C.F.R. PARTS 730-774. VIOLATIONS OF THE EAR ARE SUBJECT TO SEVERE CRIMINAL PENALTIES UNDER THE EXPORT CONTROL REFORM ACT, AS AMENDED (TITLE 50, U.S.C., SEC. 4801, ET SEQ.).

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. BELACK 16SEP2015	 TE Connectivity		
DIMENSIONS: mm [INCH]		CHK P. D'AMATO 16SEP2015			
		APVD P. D'AMATO 16SEP2015			
		PRODUCT SPEC			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		-	NAME SEALED COPALUM		
0 PLC ±-		APPLICATION SPEC	-		
1 PLC ±-		-	-		
2 PLC ±-		WEIGHT	-		
3 PLC ±-		-	-		
4 PLC ±-		-	-		
ANGLES ±-		-	-		
FINISH		-	-		
MATERIAL		-	-		
-		-	-		
-		-	-		

Customer Drawing	SCALE 2:1	SHEET 1 OF 1	REV J
------------------	--------------	-----------------	----------