



Switches > Push Button Switches



Configuration (Pole-Throw): **Single Pole - Single Throw**
Push Button Switch Product Type: **Emergency Stop Switch**
Number of Actuators: **Single**
Actuator Profile: **Extended**
Bushing Style: **Threaded**

Features

Product Type Features

Switch Connection Type	Wire Lugs
Push Button Switch Product Type	Emergency Stop Switch
Illuminated	With
Actuator Style	Top Actuator

Configuration Features

Panel Cutout Size	16 (Diameter) mm[.63 (Diameter) in]
Configuration (Pole-Throw)	Single Pole - Single Throw
Number of Actuators	Single
Snap Action	With
Switch Feedback Type	Tactile & Auditory
Operating Function	Maintained, NC

Electrical Characteristics

Contact Current Rating	3 A
Operating Voltage Range	120 VAC



Body Features

Case Material	PPA
Sealing Method	Rubber O-Ring
Actuator Material	Polyamide
Product Orientation	Vertical
Actuator Force	2040 g[72 oz]
Actuator Profile	Extended
Bushing Style	Threaded
Bushing Thread Size	M16 x 1
Actuator Color	Red

Contact Features

Contact Base Material	Copper Alloy
-----------------------	--------------

Mechanical Attachment

Attachment Method	Screw-On
-------------------	----------

Dimensions

Bushing Length	42.4 mm[1.67 in]
Bushing Diameter	16 mm[.63 in]
Actuator Length	31 mm[1.22 in]

Industry Standards

IP Rating	IP65
-----------	------

Packaging Features

Packaging Method	Bulk
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC




Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

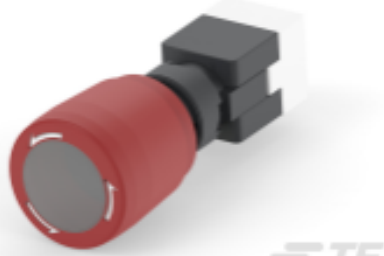

TE Part # 2381880-7

PBES16 28 INCA 48V AC/DC 25mA 000 1NC

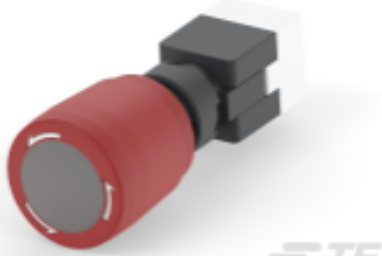

TE Part # 2381880-9

PBES16 28 LED 6V DC 28mA 000 1NC

Also in the Series | ALCOSWITCH PBES16



Emergency Stop Switches(42)



Push Button Switches(42)

Customers Also Bought

PBES16L1LR

Emergency Stop Switch, Single Pole - Single Throw Configuration (Pole-Throw), Single Actuator, Extended Actuator, Illuminated, ALCOSWITCH PBES16





TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT




TE Part #DT06-2S
PLG, 2P, GRY, N



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT

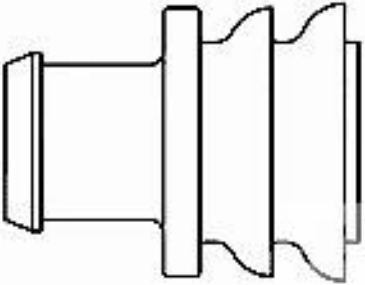

TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING

Documents

Product Drawings

PBES16 28 INCA 60V AC/DC 20 mA 000 1NC

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2381880-8_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2381880-8_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2381880-8_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ALCOSWITCH PBES16 Series

English