




Terminals & Splices > Quick Disconnects

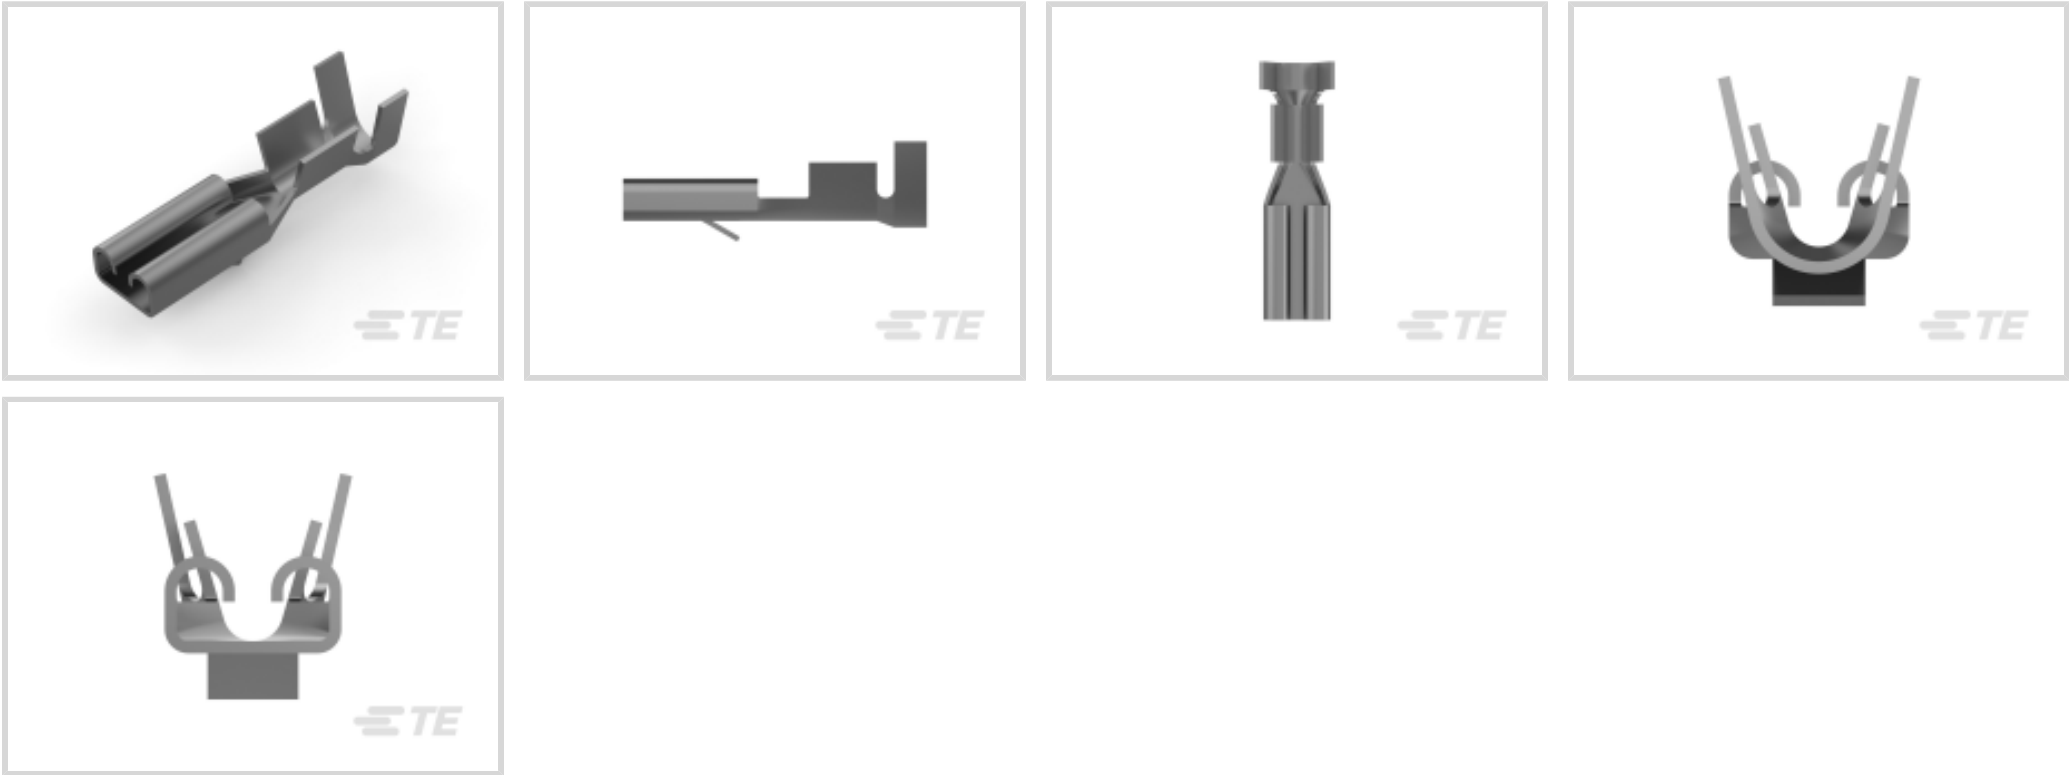

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1021 – 3256 CMA**

Mating Tab Width: **2.8 mm [.11 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.79 mm[.031 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Locking Lance



Dimensions

Product Length	15 mm[.59 in]
Compatible Insulation Diameter Range	2.07 – 3.04 mm[.08 – .12 in]
Wire Size	1021 – 3256 CMA

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Packaging Features

Packaging Quantity	500
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Also in the Series | **FASTON 110**

Crimp Terminal Housings(13)	Insertion & Extraction Tools(1)	PCB Terminals(22)	Quick Disconnects(163)

Customers Also Bought

 TE Part #YHDP26-24-91SEL024 PLG, 9P, BLK, E, WTHD, 8/12/16, S	 TE Part #1028-017-0005 ADPTR, BKSHL, 6,8P, BLK, RA, NW 10 /13	 TE Part #K1143392 Battery Disconnecter 35-411-120-R	 TE Part #144935-1 26POS MQS REC
 TE Part #770904-4 MINI UMNL SOK CONT 22-18 AWG	 TE Part #4-968970-1 MCP2,8 GEH ASSY 6P	 TE Part #2-1633966-9 CRIMPER,INSULATION O	 TE Part #5-240655-0 ANVIL
 TE Part #7-904741-1 CRIMPER, INSULATION "O"(.125")	 TE Part #2217529-1 HOLD DOWN, TERMINAL		

Documents

Product Drawings
TERMINAL

English

CAD Files
3D PDF
3D



Customer View Model
[ENG_CVM_CVM_160668-6_B.2d_dxf.zip](#)
English
Customer View Model
[ENG_CVM_CVM_160668-6_B.3d_igs.zip](#)
English
Customer View Model
[ENG_CVM_CVM_160668-6_B.3d_stp.zip](#)
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Product Specification
English
Product Specification
English
FASTIN-FASTON CONN. .110 INCH, .187 INCH, .250 INCH, .375 INCH SRS.
English
Product Specification
English