© 2025 TE Connectivity. All Rights Reserved.

REVISIONS

REV	DESCRIPTION	DATE	DWN	APVD
a	DE041214	05/12/14	–	–
b	DE170325	04/04/25	H.B	G.M
C	DE020825	09/03/25	KS	G.M

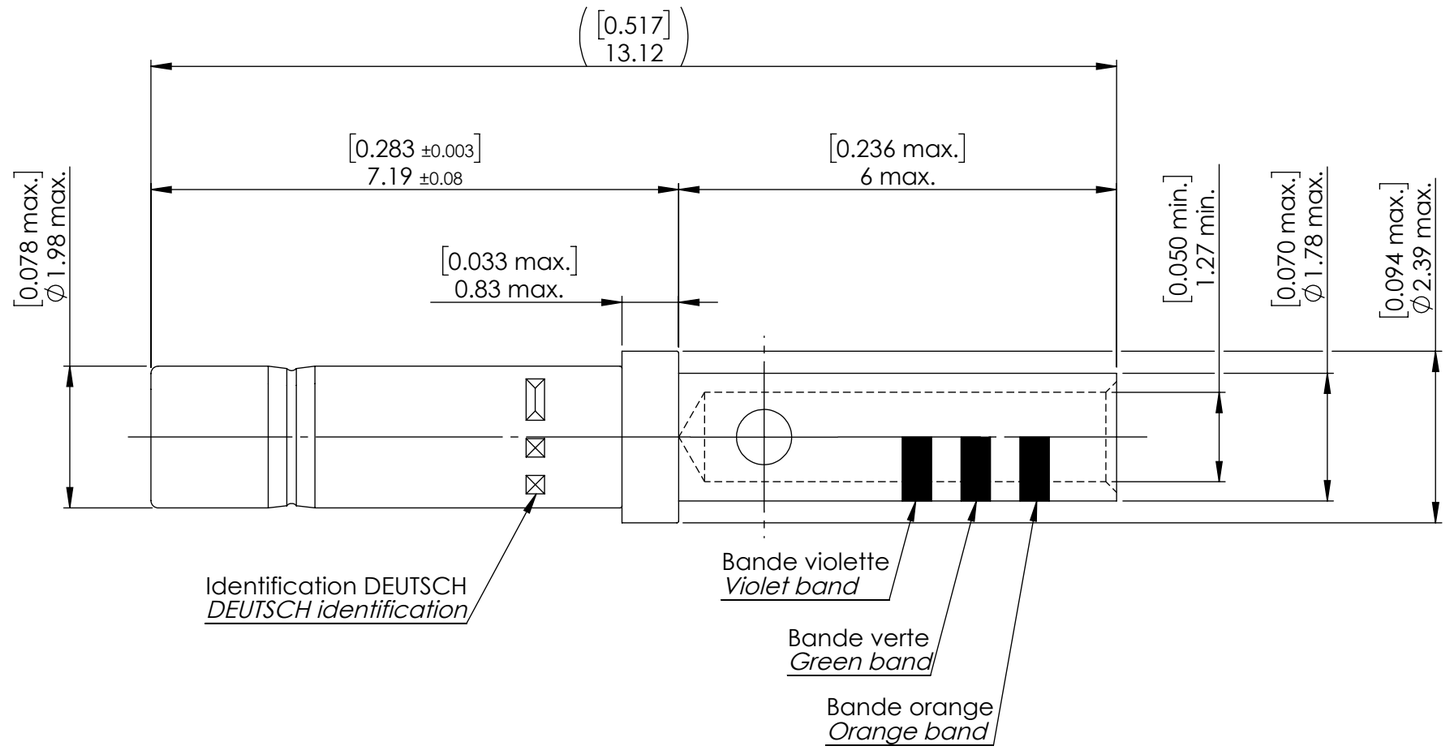

NOTES:

1. Matière : Alliage de cuivre
   Material : Copper alloy

2. Revêtement : Dorure Epaisseur : 1,27 µm min.
   Plating : Gold Thickness : 50 µin min.

3. Outil d'insertion / extraction : M81969/14-10
   Insertion / extraction tool : M81969/14-10

4. Pince à sertir : M22520/1-01 Positionneur : M22520/1-04
   Crimping tool : M22520/1-01 Positionner : M22520/1-04

Dimensions conformes à EN3155-003F2020
Dimensions according to EN3155-003F2020

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±–
1 PLC ±–
2 PLC ±–
3 PLC ±–
4 PLC ±–
ANGLES ±–°

MATERIAL: SEE NOTES –

FINISH: SEE NOTES –

DWN KARTHI S 09/03/2025
CHK PHANI K 09/03/2025
APVD GAËTAN M 09/03/2025
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT 0.25 g

TE Connectivity

NAME: S/E CONTACT DOUILLE #20 SERIE : DMC-M –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	F1983	C-724-0003-20	–

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV C