

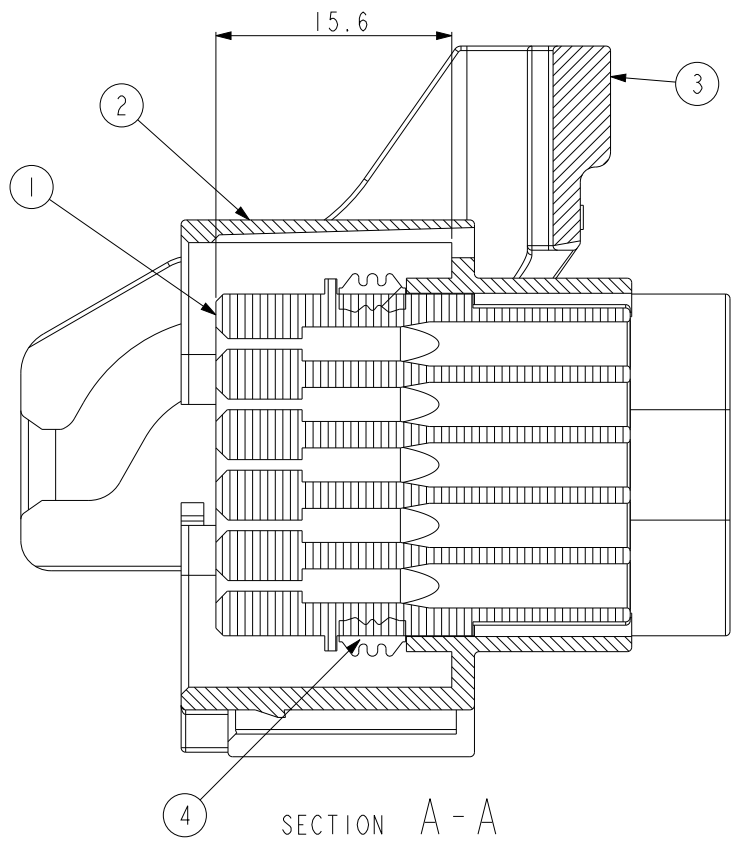
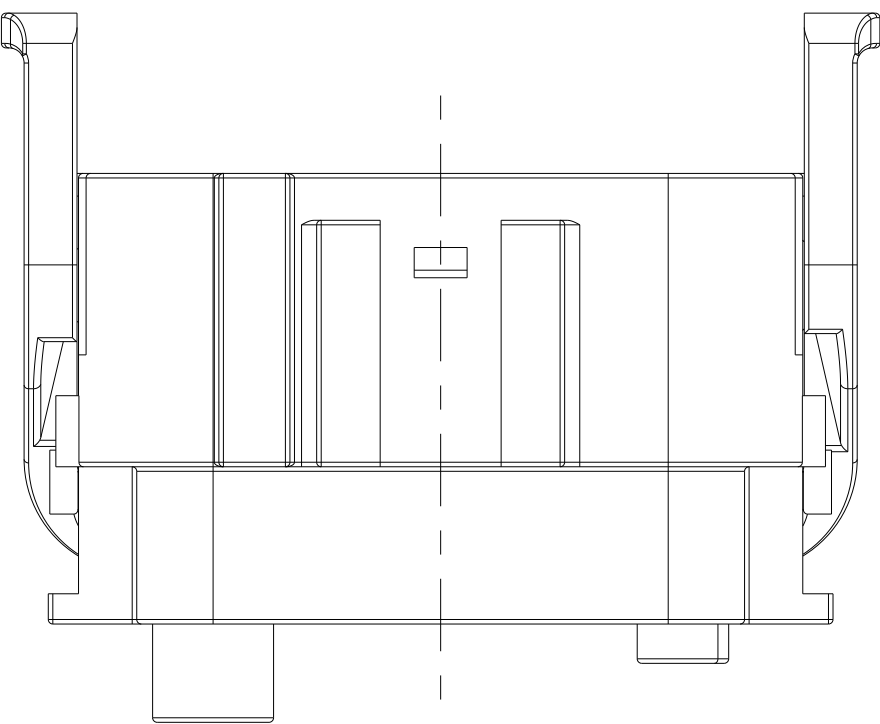
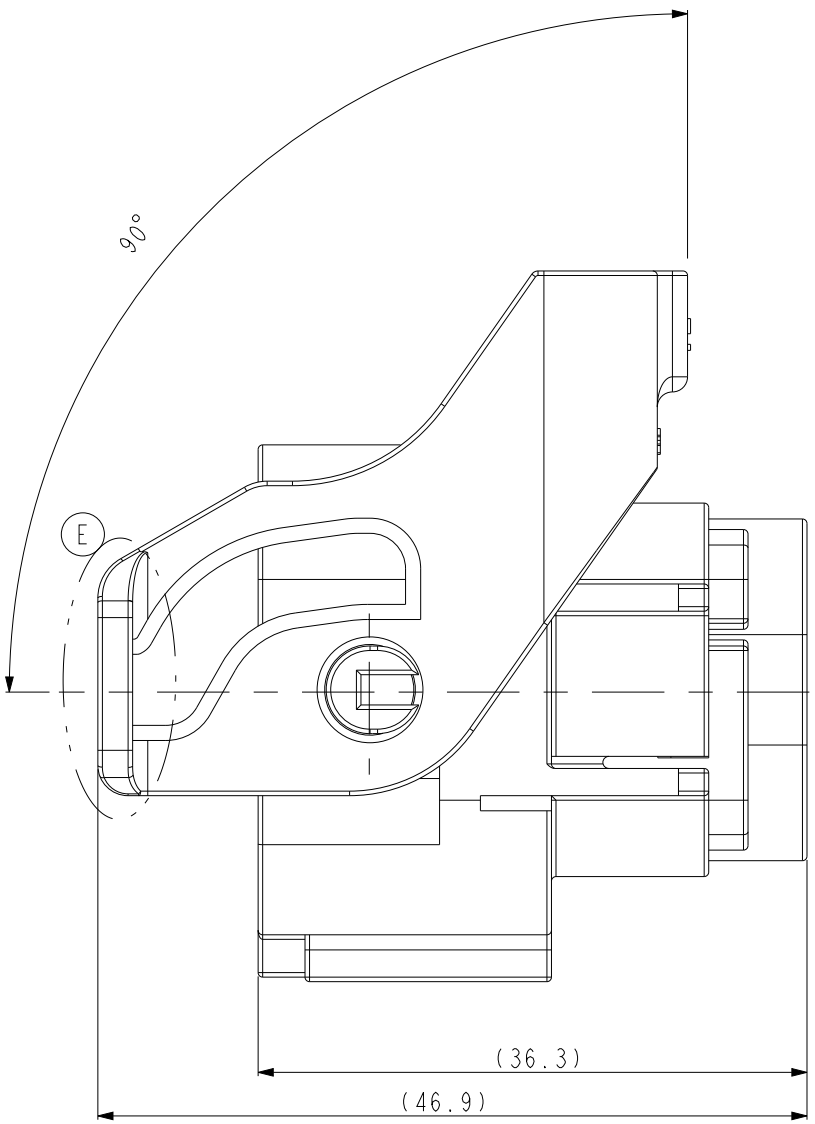
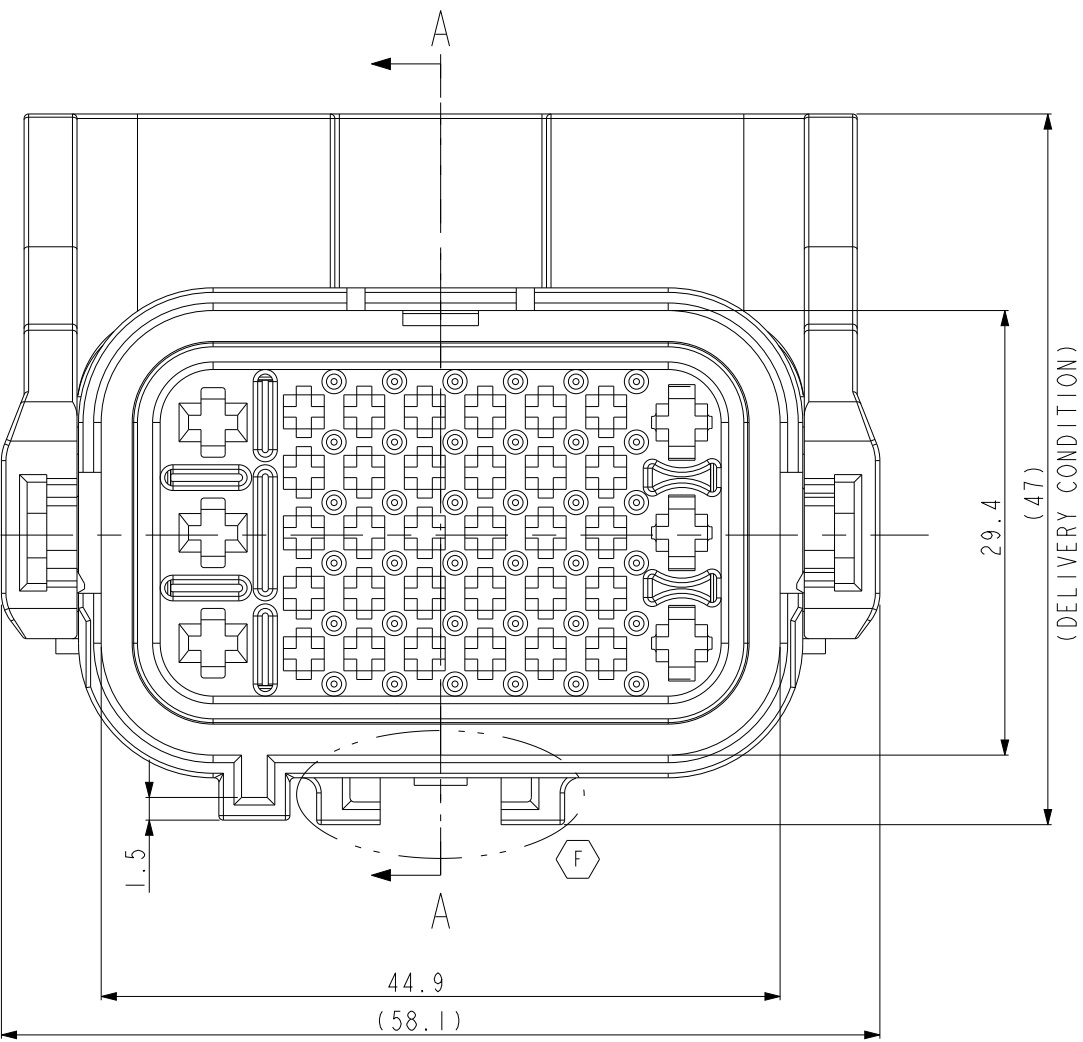
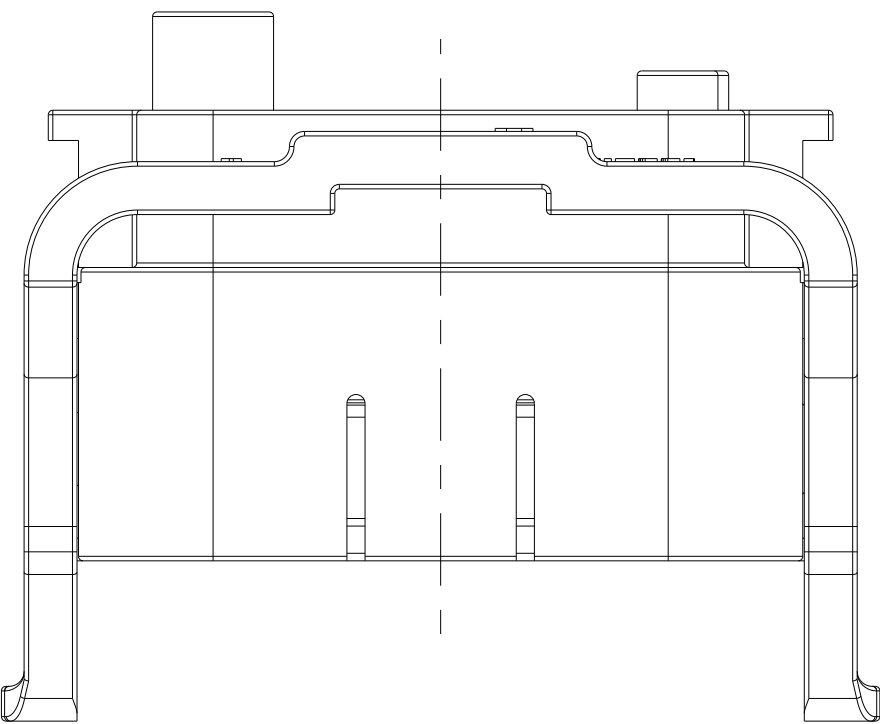
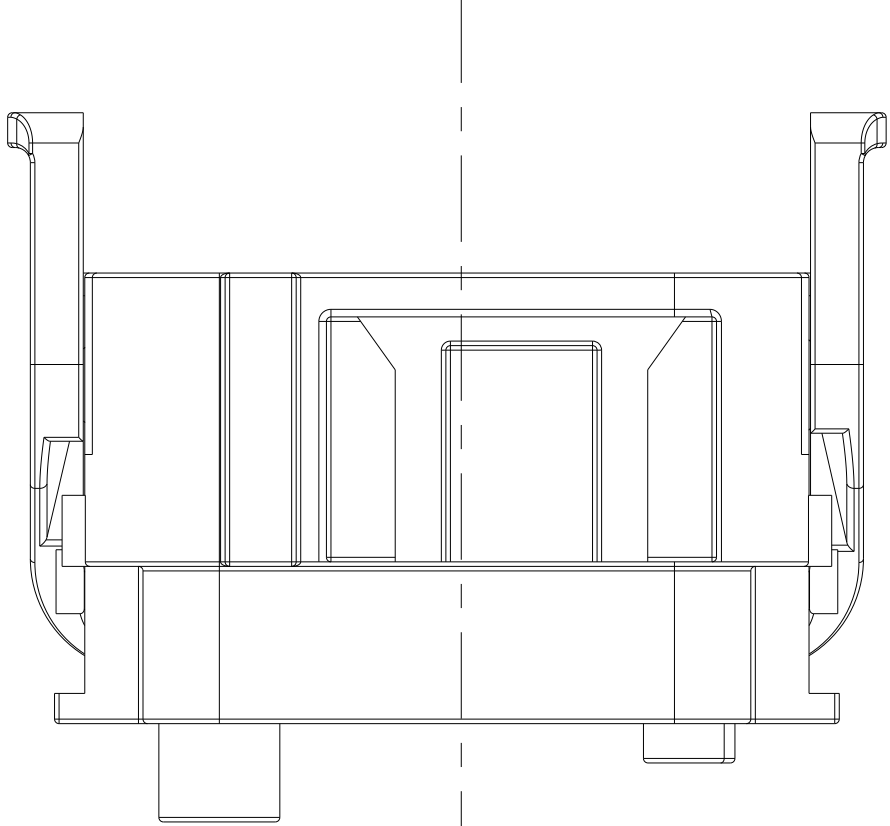


TYPE B (DELPHI CLIP MOUNTING TYPE)
1-1743632-2

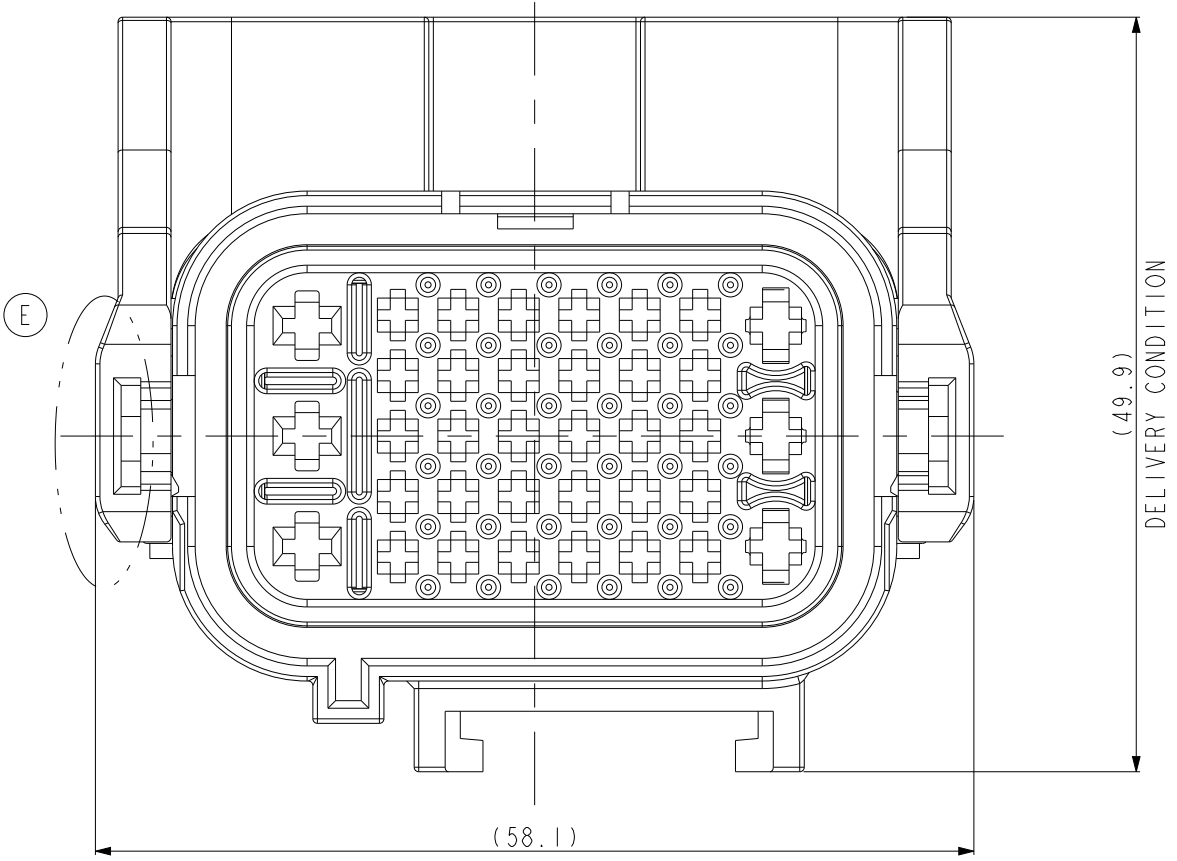

<TABLE 3>

TYPE B	TYPE A
1-1743632-2	0-1743632-2

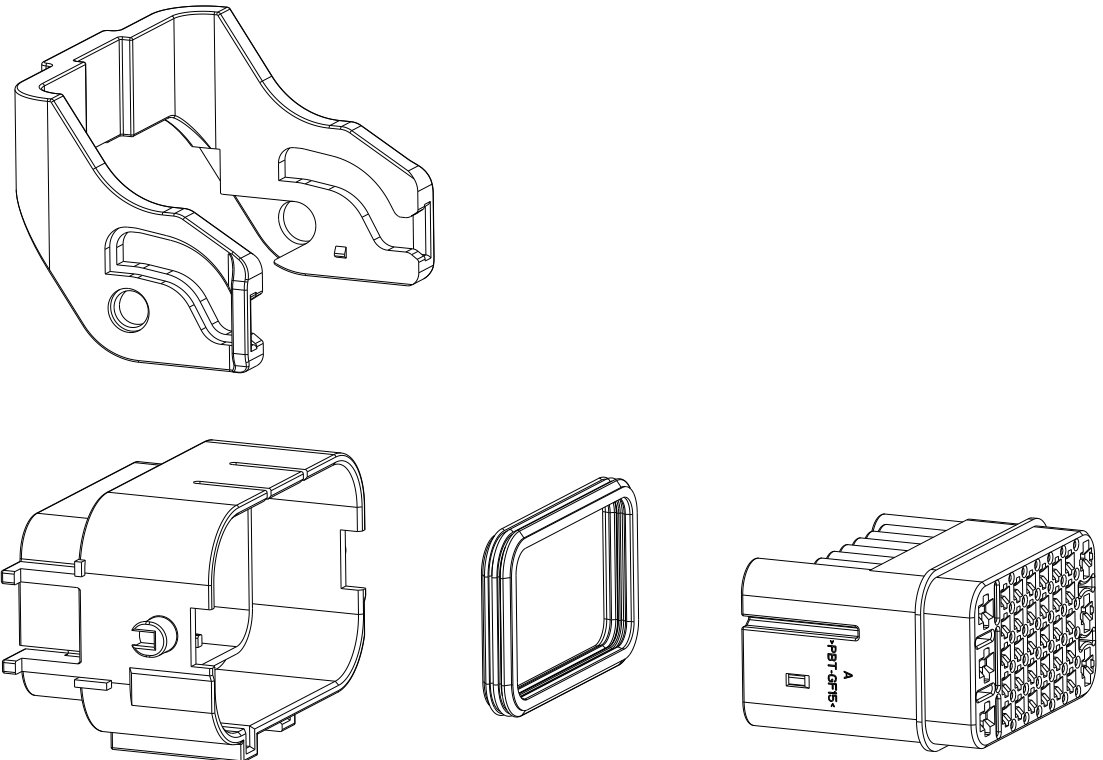

3D EXPLODE VIEW
(SCALE 1:1)

<TABLE 1>

TYPE	PART NO.	WIRE SIZE(mm²)	Insulation DIA(mm)	Applicable WIRE	FINISH
MTII	0-962875-1	0.2~0.5	1.2~1.6	AVSSXF 0.5 Max	CuSn4
	0-962875-3				CuSn4(GOLD)
	0-962876-1	0.5~1.0	1.4~2.1	AVSSXF 0.85 Max	CuSn4
	0-962876-3				CuSn4(GOLD)
JPT	0-927770-3	0.5~1.0	2.0~2.7	FLK 1.0 Max	CuSn4
	2-927770-1				CuSn4(GOLD)
	0-927766-3	1.5~2.5	2.7~3.0	AVSS 2.0 Max or FLR 2.5 Max	CuSn4
	2-927766-1				CuSn4(GOLD)
MCP	1-968859-1	2.5~4.0	3.0~3.7	AEXF 3.0 Max or FLR 4.0 Max	CuNiSi

<TABLE 2>

TYPE	WIRE SIZE(mm²)	PART NO.	WIRE INSULATION DIAMETER(mm)	COLOR
MTII	0.35~0.5	964971-1	1.2~1.6	RED
	0.5~0.75	963530-1	1.4~1.9	GRAY
	1.0	964972-1	1.9~2.1	YELLOW
		963531-1	CAVITY PLUG	WHITE
JPT	0.35~1.0	828904-1	1.2~2.1	BLUE
	1.5~2.5	828905-1	2.2~3.0	WHITE
		828922-1	CAVITY PLUG	NATURAL
	2.5~4.0	828985-1	3.0~3.7	GREEN
MCP		828986-1	CAVITY PLUG	BROWN

NOTE

1. GENERAL TOLERANCE:±0.3, ±3°

2. DELIVERY CONDITION

3. APPLIED CAP P/N:X-1743636-X

APPLIED WIRE COVER P/N:X-1743637-X

4. APPLICABLE RECEPTACLE CONTACT P/N:TABLE 1

TERMINAL TYPE	CAVITY/CIRCUIT NO.
JPT	1,15,29
MCP	8,22,36
MTII	REMAINING

5. APPLICABLE WIRE SEAL P/N:TABLE 2

6. CLIP MOUNTING FEATURE : TABLE 3

4	INNER SEAL	SILICONE	RED ORANGE	I	I
3	LEVER	PBT-GF20	GRAY	I	I
2	MAIN PLUG (TYPE B)	PBT-GF15	BLACK	I	-
	MAIN PLUG (TYPE A)	PBT-GF15	BLACK	-	I
1	FRONT PLUG	PBT-GF15	BLACK	I	I
NO	DESCRIPTION	MATERIAL	COLOR	O'TY	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: CH PARK
CHK: YM CHOI
APVD: JK SONG

PRODUCT SPEC
(F1) 08-61618

APPLICATION SPEC

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 1743632

RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: 2:1
SHEET: 1 OF 1
REV: F3

TE Connectivity

NAME: PLUG ASS'Y FOR MTII JPT MCP SEALED 36P CONN'R

DATE: 08-16-18

APPLICABLE RECEPTACLE CONTACT P/N:TABLE 1

APPLIED WIRE COVER P/N:X-1743637-X

APPLIED CAP P/N:X-1743636-X

DELIVERY CONDITION

GENERAL TOLERANCE:±0.3, ±3°