



# RAYCHEM SINGLE PAIR ETHERNET (SPE) CABLES

Enabling 100 Mb/s or 1 Gb/s Ethernet Connectivity Using a Single Pair Ethernet Design

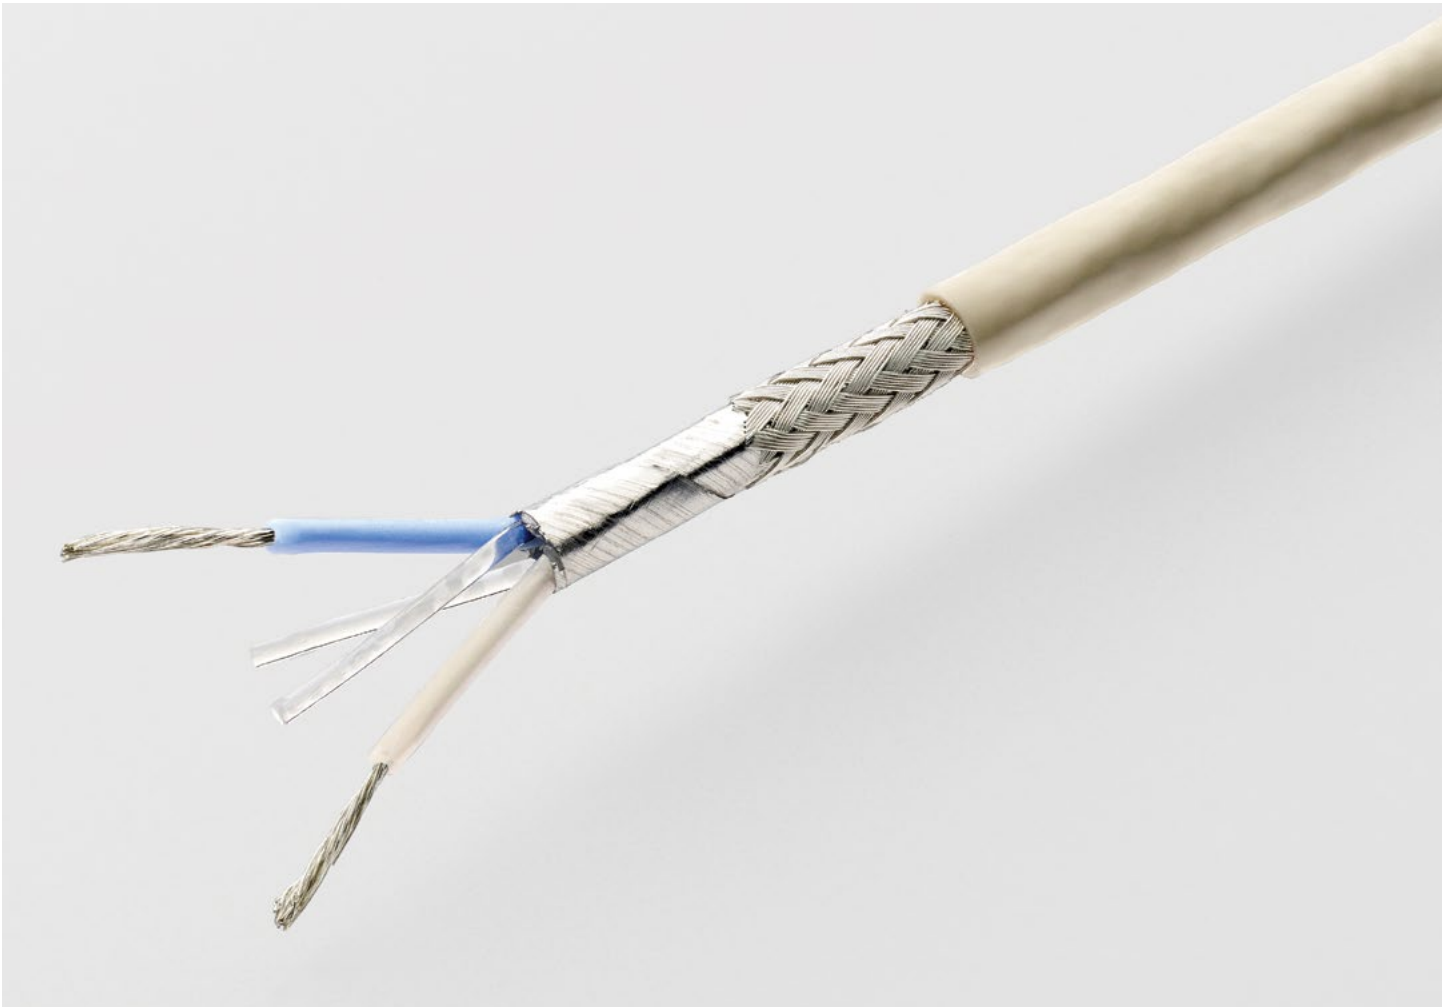

# RAYCHEM SINGLE PAIR ETHERNET (SPE) CABLES

Enabling 100 Mb/s or 1 Gb/s Ethernet Connectivity Using a Single Pair Ethernet Design

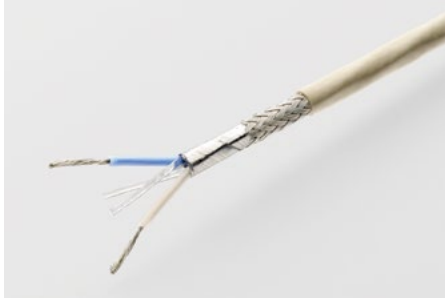

## MARKETS SERVED

- Military Aerospace
- Commercial Aerospace
- Defense
- Low Earth Orbit Satellites
- eVTOL

## RUGGED

- Meets many stringent aerospace industry flammability, smoke and toxicity requirements

## REDUCED SIZE AND WEIGHT

- Compared to existing multi-pair ethernet systems
- Termination time: Octax/Quadrax: 15-20 minutes vs. 369: 2-5 minutes

## REDUCED INSTALLATION TIME

- Single pair cable vs. over multi-pair

## VERSATILE

- End to end solution using TE ARINC 854 connectors

## Description

TE Connectivity's (TE) has released a Single Pair Ethernet (SPE) cable that enables the transmission of data by ethernet using one twisted pair. This product is currently capable of transmission rates ranging from 100 Mb/s to 1 Gb/s.

## ELECTRICAL/ENVIRONMENTAL

- **Differential Impedance:** 100 +/- 10  $\Omega$
- **Attenuation (Max.) at 600 MHz:**  
24 AWG: 14.4dB/15m  
26 AWG: 14.4dB/15m
- **Mutual Capacitance (Max.) at 1 kHz:** 13 pF/1ft
- **Temperature Rating:** -65°C to +150°C

## MATERIALS

- **Conductors:** 24 and 26 AWG Silver-coated high strength copper alloy
- **Dielectric:** Foamed FEP
- **Inner Shield:** Al/PET
- **Shielding:** Silver-coated copper
- **Jacket:** FEP
- **Available Jacket Colors:** Laser markable white, black, white, brown, red, orange, yellow, green, blue, violet, gray and clear (translucent available)

## APPLICATIONS


- Avionics
- Inflight Entertainment (IFE)
- Galley Systems
- Interior Cabin Lighting
- eVTOL (Electric Vehicle Takeoff and Landing)

## STANDARDS AND SPECIFICATIONS

- Meets requirements of ARINC 800
- Flammability: FAR Part 25, Appendix F, Part 1 & AS4373
- Smoke Density and Toxicity: BSS7238, BSS7239, AITM 2-0008 and AITM 3-0005



# RAYCHEM SINGLE PAIR ETHERNET (SPE) CABLES

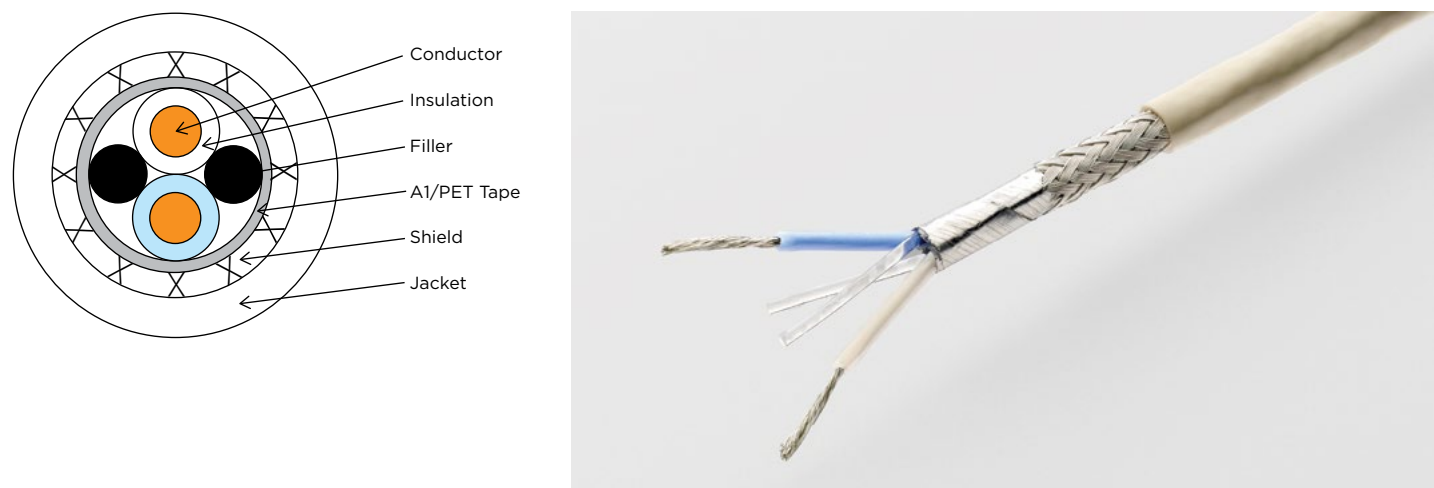

| TE Description | TE Part Number | Temperature Range (°C) | Jacket OD (in/mm), Nom. | ARINC 854 Connector Compatibility | Molded Boot Compatibility |
|----------------|----------------|------------------------|-------------------------|-----------------------------------|---------------------------|
| 0024B8424-9    | EP3169-000     | -65 to +150°C          | 0.161 (4.089)           | YD369-MP99-NP10000                | 202D971-4/86-0            |
| 0026G8424-9    | EP3166-000     | -65 to +150°C          | 0.135 (3.429)           | YD369-MP99-NP10000                | 202D971-4/86-0            |

Additional constructions and custom designs available upon request - please contact your local account representative for questions

## Complete System Solutions



End-to-End Solutions

### 369 Series Shielded Connectors

- 100Base-T1 standard
- 15 m link with four connector breaks
- Reduces termination complexity
- (369) 2-5 minutes vs. (Quadrax) 6-10 minutes



Molded Parts

### Molded Parts

- Molded part shape designed specifically for use with 369 connector and Single-Pair Ethernet cable
- Flexible polyolefin (-4) material provides strain relief, environmental sealing, and abrasion resistance
- High temperature adhesive (/86) for bonding with cable jacket or heat shrink tubing
- Low profile design and 2:1 heat shrink ratio for ease of installation

## Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.  
Visit [te.com/support](https://te.com/support) to chat with a Product Information Specialist.

TE Connectivity  
Aerospace, Defense & Marine

2900 Fulling Mill Road  
Middletown, PA 17057

[te.com/single-pair-ethernet](https://te.com/single-pair-ethernet)

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

©2026 TE Connectivity. All Rights Reserved.

2386805-1 03/26