


AMPLIVAR Splices

5 Serrations— Thru Type

Product Facts

- Wide range of thru splices
- Serrations centered in splice to achieve optimum electrical and mechanical performance in a thru splice
- CMA range accepts a wide variety of wire sizes and combinations

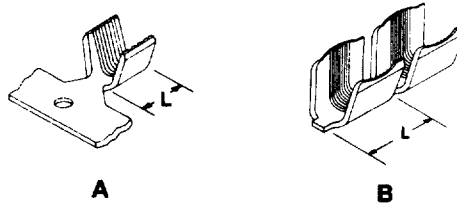


Type	Wire Range CMA	Stock Thickness	Crimp Width	Dim. L	Material	Part Number
A	2000–5400	.020 0.51	.110 5.08	.235 5.97	Brass	63564-1
A	10,000–16,000	.032 0.80	.180 4.57	.267 6.78	Tin Plated Brass	63561-1
A	10,400–22,900	.030 7.62	.300 7.62	.310 7.87	Tin Plated Brass	63562-1
B	600–3000	.020 0.51	.110 2.79	.225 5.72	Brass	42076-0
B	600–3000	.020 0.51	.110 2.79	.225 5.72	Brass	42192-1*
B	600–3000	.020 0.51	.110 2.79	.225 5.72	Tin Plated Brass	42192-2*
B	1500–5000	.020 0.51	.110 2.79	.225 5.72	Brass	41765
B	1500–5000	.020 0.51	.110 2.79	.225 5.72	Brass	42119-1*
B	1500–5000	.020 0.51	.110 2.79	.225 5.72	Tin Plated Brass	41899
B	3000–7000	.020 0.51	.140 3.56	.225 5.72	Brass	41766
B	3000–7000	.020 0.51	.140 3.56	.225 5.72	Tin Plated Brass	41900
B	7000–13,000	.025 0.64	.180 4.57	.225 5.72	Brass	41770
B	7000–13,000	.025 0.64	.180 4.57	.225 5.72	Tin Plated Brass	41904

*These splices are recommended for applications using wire size 26 AWG [0.404 mm] or smaller.

Miniature Splice— Pigtail Type


Product Facts

- The compactness of these splices makes them ideal for use in small subfractional motors, transformers, relays, solenoids, indicator lamps and small appliance terminations
- These splices provide the same reliability as the larger AMPLIVAR splices



Wire Range CMA	Stock Thickness	Crimp Width	Dim. L	Material	Part Number
200–850	.012 0.30	.055 1.40	.195 4.95	Tin Plated Brass	63431-1
480–1700	.014 0.36	.080 2.03	.195 4.95	Tin Plated Brass	62341-1

Subminiature Splice Thru or Pigtail Type



Wire Range CMA	Stock Thickness	Crimp Width	Dim. L	Material	Part Number
100–300	.010 0.25	.042 1.08	.080 2.03	Tin Plated Brass	63621-1
400–1600	.016 0.41	.070 1.78	.100 2.54	Tin Plated Brass	62194-2

For complete product information, order Catalog 82221