


RP73D1J316KBTDG Product Details

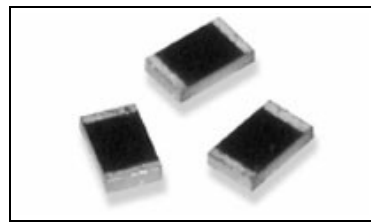

RP73D1J316KBTDG
(6-1879747-8)

TE Internal Number: 6-1879747-8

Active

Fixed Resistors

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Fixed Resistor
- Resistor Type = Precision Resistor
- Resistance Selection = K Ω
- Resistance = 316K Ω
- Power Rating = .10 W

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | Request Sample | Find Similar Products | Buy Product

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • 1309350_PASSIVE_COMPONENT (PDF, English) • 8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS... (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
--	--

[List all Documents](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Fixed Resistor • Resistor Type = Precision Resistor • Element = Thin Film <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Resistance Selection (Ω) = K • Resistance (Ω) = 316K • Power Rating (W) = 0.10 • Tolerance (%) = 0.1 <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Type = Solder <p>Body Features:</p> <ul style="list-style-type: none"> • Mount Style = Surface Mount • Packaging Style = 0603 • Package, Component Size = 1.6 x 0.8 	<p>Configuration Features:</p> <ul style="list-style-type: none"> • Number of Terminations = 2 • Number of Resistors = 1 <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Reflow solder capable to 245°C, Reflow solder capable to 260°C • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Temperature Coefficient (ppm/°C) = ± 15 <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = Precision <p>Packaging Features:</p> <ul style="list-style-type: none"> • Package Type = Taped and Reeled <p>Other:</p> <ul style="list-style-type: none"> • Series = RP73 • Brand = Holsworthy
---	--

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)

Keep Me Informed



[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility
Plan](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Manage Your Account](#)

