


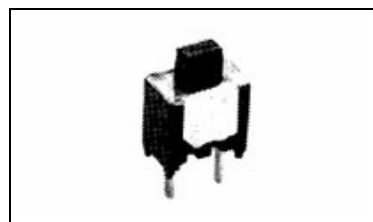

TP11CGPC0 Product Details

[Share](#) | [Print](#) | [Email](#)


TP11CGPC0
(1437571-4)

TE Internal Number: 1437571-4

Active

Pushbutton Switches

 Not EU RoHS or ELV Compliant ([Find RoHS Compliant Alternates](#))

Product Highlights:

- Switch
- Not Tactile
- Single Pole - Single Throw Configuration (Pole-Throw)
- Contact Rating = 0.4VA
- Operating Function = Normally Open, Momentary

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [PUSH BUTTON SWITCH TP11CG/FG-PC\(*\) AND TP21CCG/FFG-PC\(*\)](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Switch
- Mount Angle = Vertical
- Actuator Style = Square

Electrical Characteristics:

- Contact Rating = 0.4VA

Termination Features:

- Termination Type = Printed Circuit

Dimensions:

- Actuator Length (mm [in]) = 3.15 [0.124]

Body Features:

- Mount Style = Through-Hole
- Actuator Profile = Extended
- Actuator Color = Black
- Case Material = Polyester
- Actuator Material = Polyamide

Contact Features:

- Contact Plating = Gold over Nickel

Housing Features:

- Process Sealed = No
- Low Profile = No

Configuration Features:

- Tactile = No
- Configuration (Pole-Throw) = Single Pole - Single Throw
- Operating Function = Normally Open, Momentary
- Ganged = No
- ESD Grounding Terminal = Without
- Number of Actuators = Single
- Illuminated = No
- Dust Proof = No
- Support Bracket = Without
- Snap Action = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

Conditions for Usage:

- Temperature Rating = High

Operation/Application:

- Actuator Force (g [oz]) = 50.00 - 400.00 [1.770 - 14.120]

Packaging Features:

- Packaging Method = Loose Piece

Other:

- Series = TP
- Brand = Alcoswitch
- Comment = No center terminal

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

