




2-1703930-1 Product Details

Share Print Email

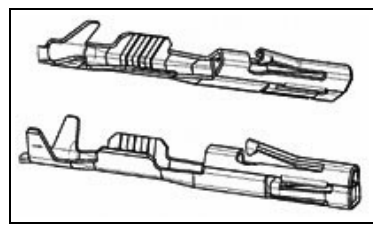

2-1703930-1

TE Internal Number: 2-1703930-1
 Active

Micro-Power & Power Quadlok System

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Applies To Wire/Cable
- Contact
- Wire Range = 0.35 [28] mm [AWG]
- Wire/Cable Type = Discrete Wire
- Wire Type = Solid

[View all Features](#)

Quick Links

- ▶ Pricing & Availability
- ▶ Search for Tooling
- ▶ Product Feature Selector
- ▶ Contact Us About This Product

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • NanoMQS Buchsenkontakt SOCKET CONTACT (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • Allgemeine Crimpspezifikation / GENERAL CRIMP SPEC. (PDF, German) <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Contact • Wire/Cable Type = Discrete Wire • Sealed = No • Locking Lance = With • Cable Type = FLR (Thin Walled Cable) <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Method to Wire/Cable = Crimp <p>Body Features:</p> <ul style="list-style-type: none"> • Wire Range (mm [AWG]) = 0.35 [28] • Wire Type = Solid <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Type = Receptacle • Contact Style = Nano MQS • Contact Finish = Tin • Contact Shape = Straight 	<p>Configuration Features:</p> <ul style="list-style-type: none"> • Dimple = Without <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Applies To = Wire/Cable • Accepts Wire Insulation Diameter, Range (mm [in]) = 1.20 [0.047] <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Strip • Packaging Quantity = 17,000 <p>Other:</p> <ul style="list-style-type: none"> • Brand = TE Connectivity

