


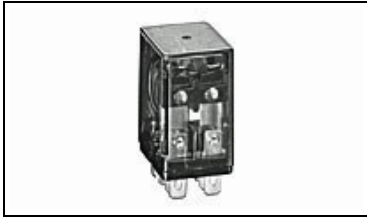

K10P-11A55-120 Product Details

[Share](#) | [Print](#) | [Email](#)


K10P-11A55-120
(4-1393144-6)

TE Internal Number: 4-1393144-6

Active

Industrial Relays (General Purpose)

Converted to EU RoHS but not ELV Compliant (Statement of Compliance)

Product Highlights:

- K10 Series
- Contact - Current Class = 10A to 20A Class, Less Than 16A
- Contact - Rated Current = 15 A
- Terminal Type = PCB-THT
- Contact - Arrangement = 2 Form C (CO)

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [K10 15 Amp General Purpose Miniature Relay](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Schematic](#)
- [PCB Layout](#)
- [Wiring Diagram](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

Electrical Characteristics:

- Contact - Current Class = 10A to 20A Class, Less Than 16A
- [Contact - Rated Current \(A\)](#) = 15
- Contact - Limiting Continuous Current (A) = 15
- Contact - Limiting Making Current (A) = 15
- Contact - Limiting Breaking Current (A) = 15
- Insulation - Initial Dielectric Between Coil/Contact Class = 1000V to 1500VA Class
- Insulation - Initial Dielectric Between Open Contacts (V rms) = 1000
- Insulation - Initial Dielectric Between Contacts and Coil (V rms) = 1500
- Contact - Rated Voltage (VAC) = 120
- Contact - Limiting Short-Time Current (A) = 15
- Contact - Switching Recommended Load, Min. = 300mA at 12V
- Coil - Rated Voltage (VAC) = 120
- [Coil - Resistance \(Ω\)](#) = 3900
- [Coil - Rated Power, AC \(VA\)](#) = 1.00
- Coil - Rated Power Class = 1.0VA to 2.0VA Class
- Insulation - Initial Dielectric Between Adjacent Contacts (V rms) = 1500
- Insulation - Initial Insulation Resistance (MΩ) = 1000000

Dimensions:

- Mechanical - Length Class = 25mm to 30mm Class
- Length (mm [in]) = 28.20 [1.111]
- Mechanical - Width Class = 20mm to 25mm Class
- Width (mm [in]) = 21.80 [0.858]
- Mechanical - Height Class = 30mm to 40mm Class
- Height (mm [in]) = 34.90 [1.374]

Body Features:

Contact Features:

- Terminal Type = PCB-THT
- Contact Material = AgCdO
- Contact - Number of Poles = 2

Configuration Features:

- [Contact - Arrangement](#) = 2 Form C (CO)
- [Coil - Magnetic System](#) = Monostable, AC
- Coil - Special Features = UL Coil Insulation Class B

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS/Not ELV Compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C
- RoHS/ELV Compliance History = Converted to comply with RoHS not ELV directives
- Approved/Registered Standards = UL, CSA

Environmental:

- Environmental - Category of Protection = RTI
- Environmental - Ambient Temperature, Max. (°C [°F]) = 70 [158]
- Environmental - Ambient Temperature Class = 50°C to 70°C Class

Packaging Features:

- Packaging Method = Tray

Other:

- [Series](#) = K10
- Brand = Potter & Brumfield

- Mount Type = PCB
- Weight (g [oz]) = 51.00 [1.799]

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

