





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD.
DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

PRINT DIST
DW

METRIC

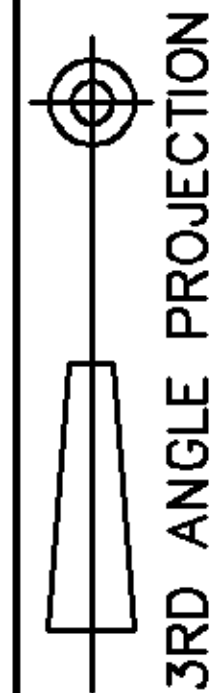


NUMBER
C-1734086

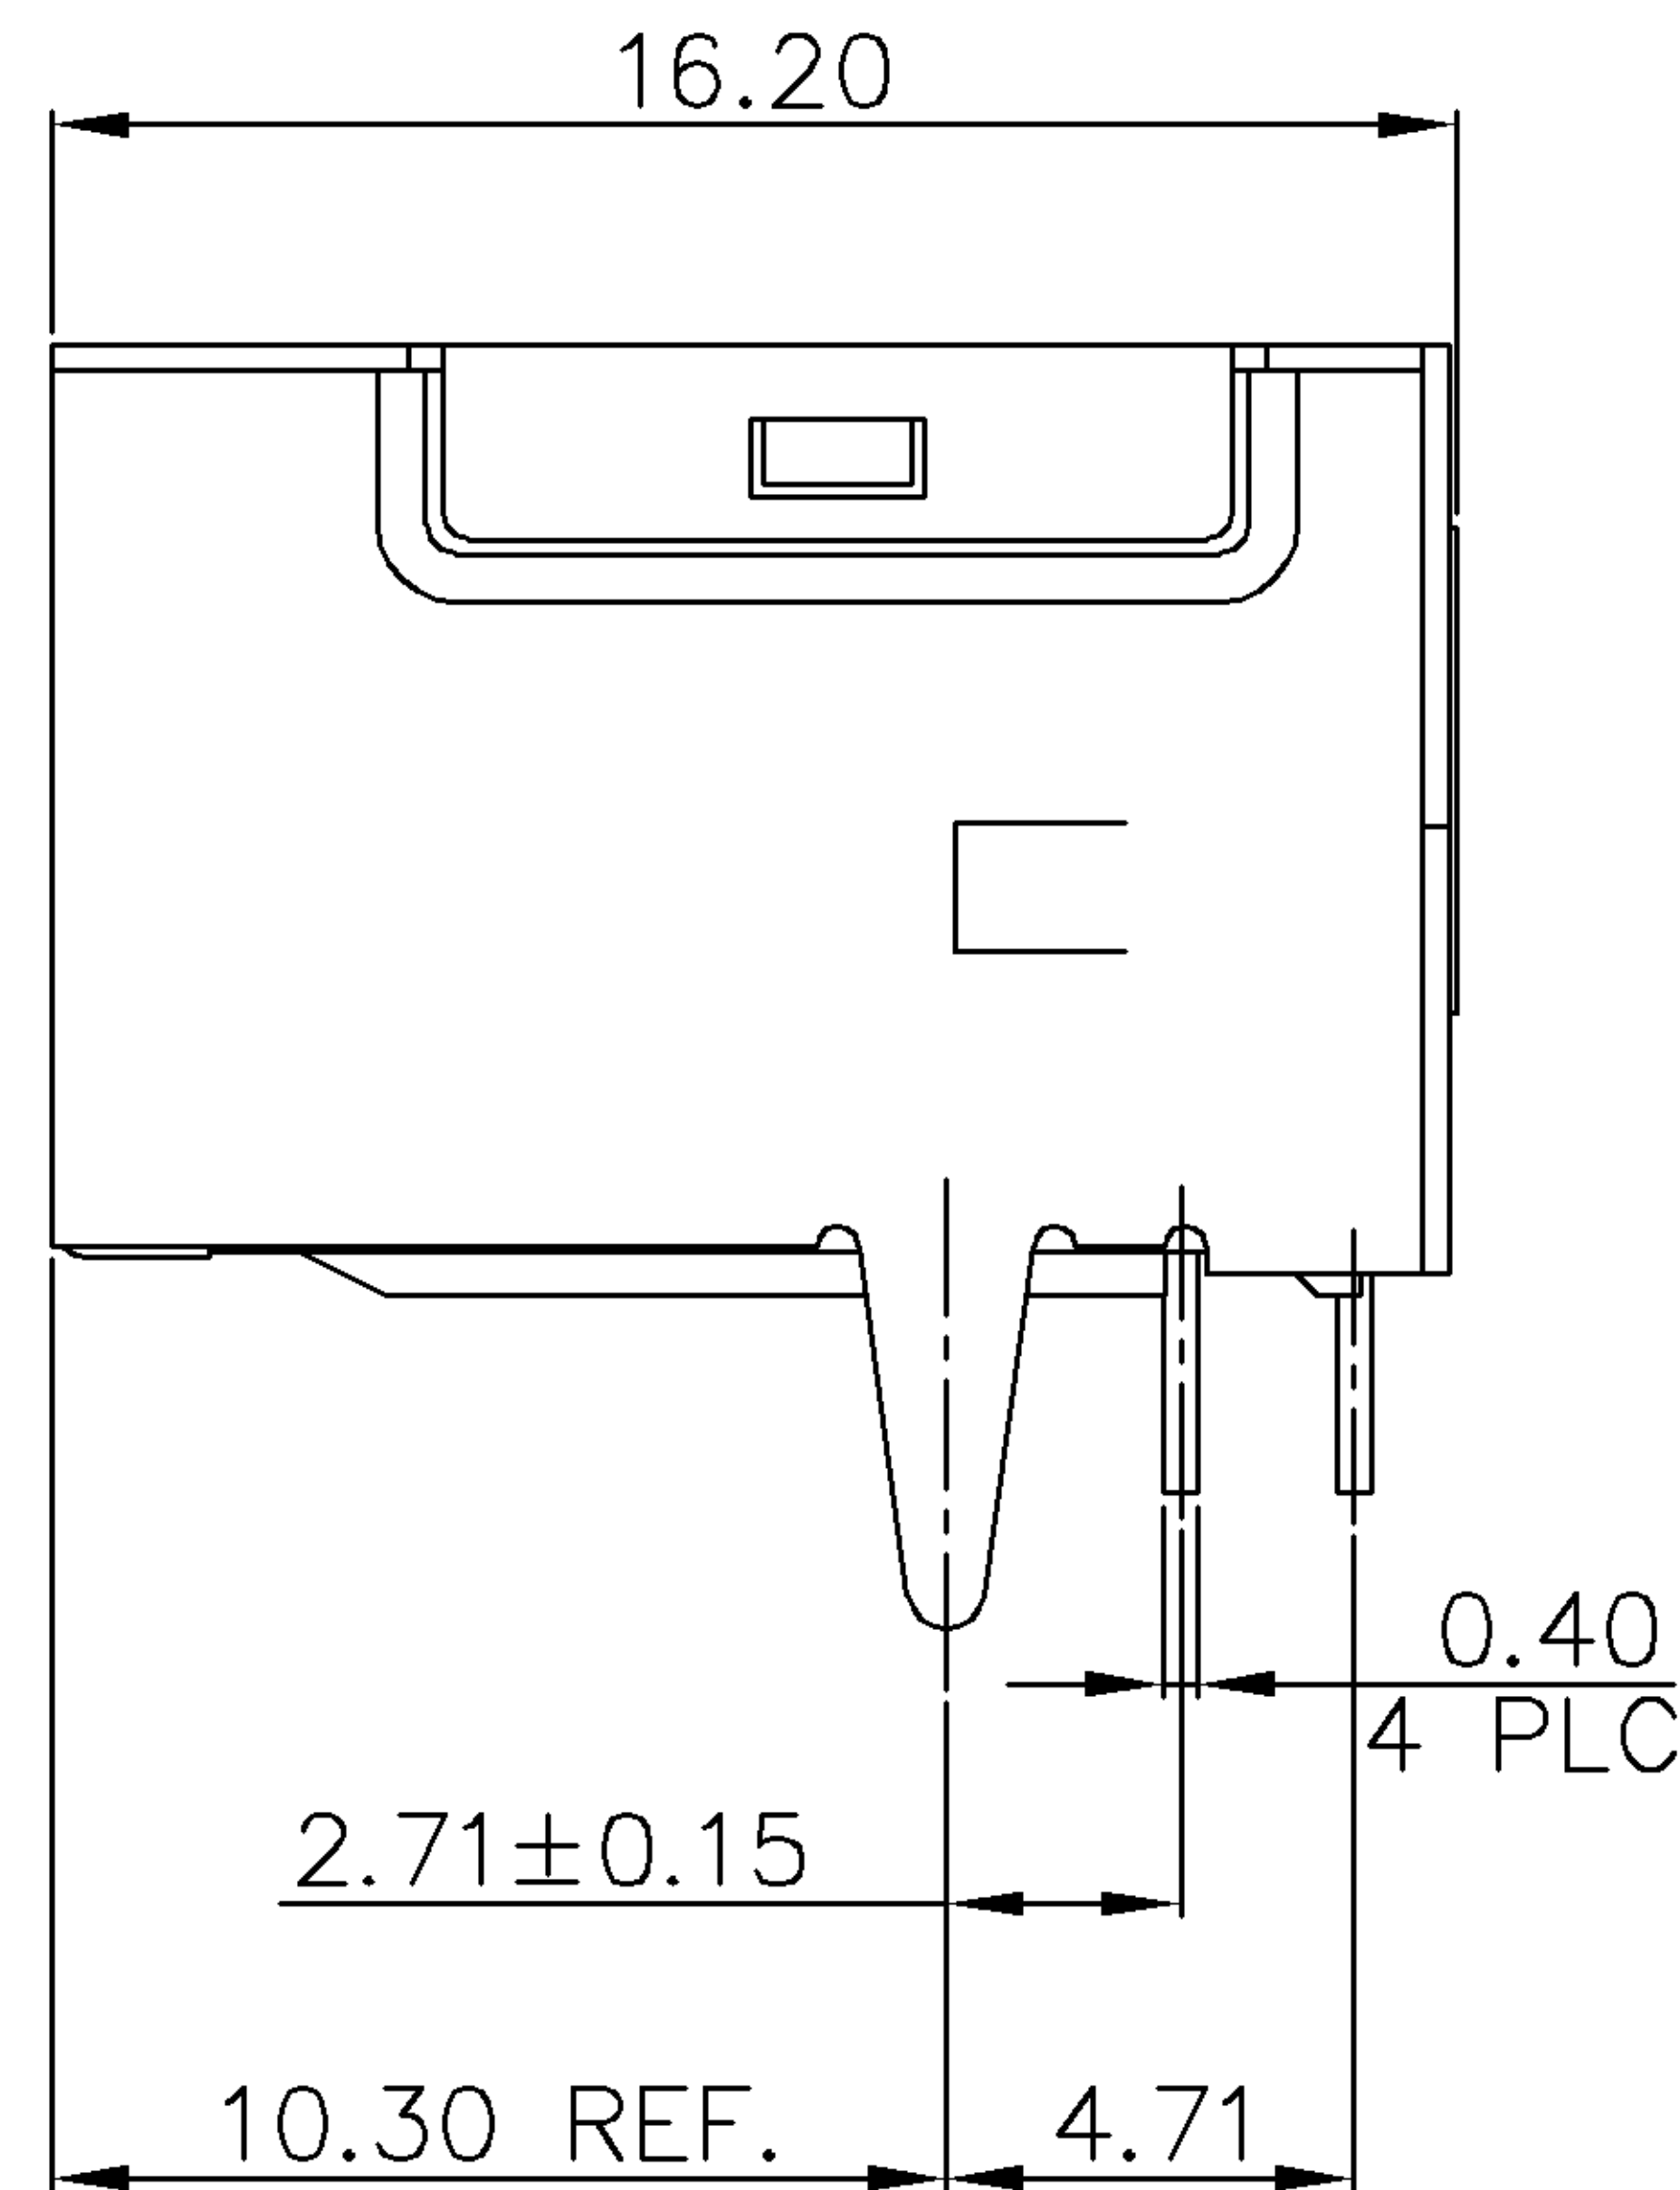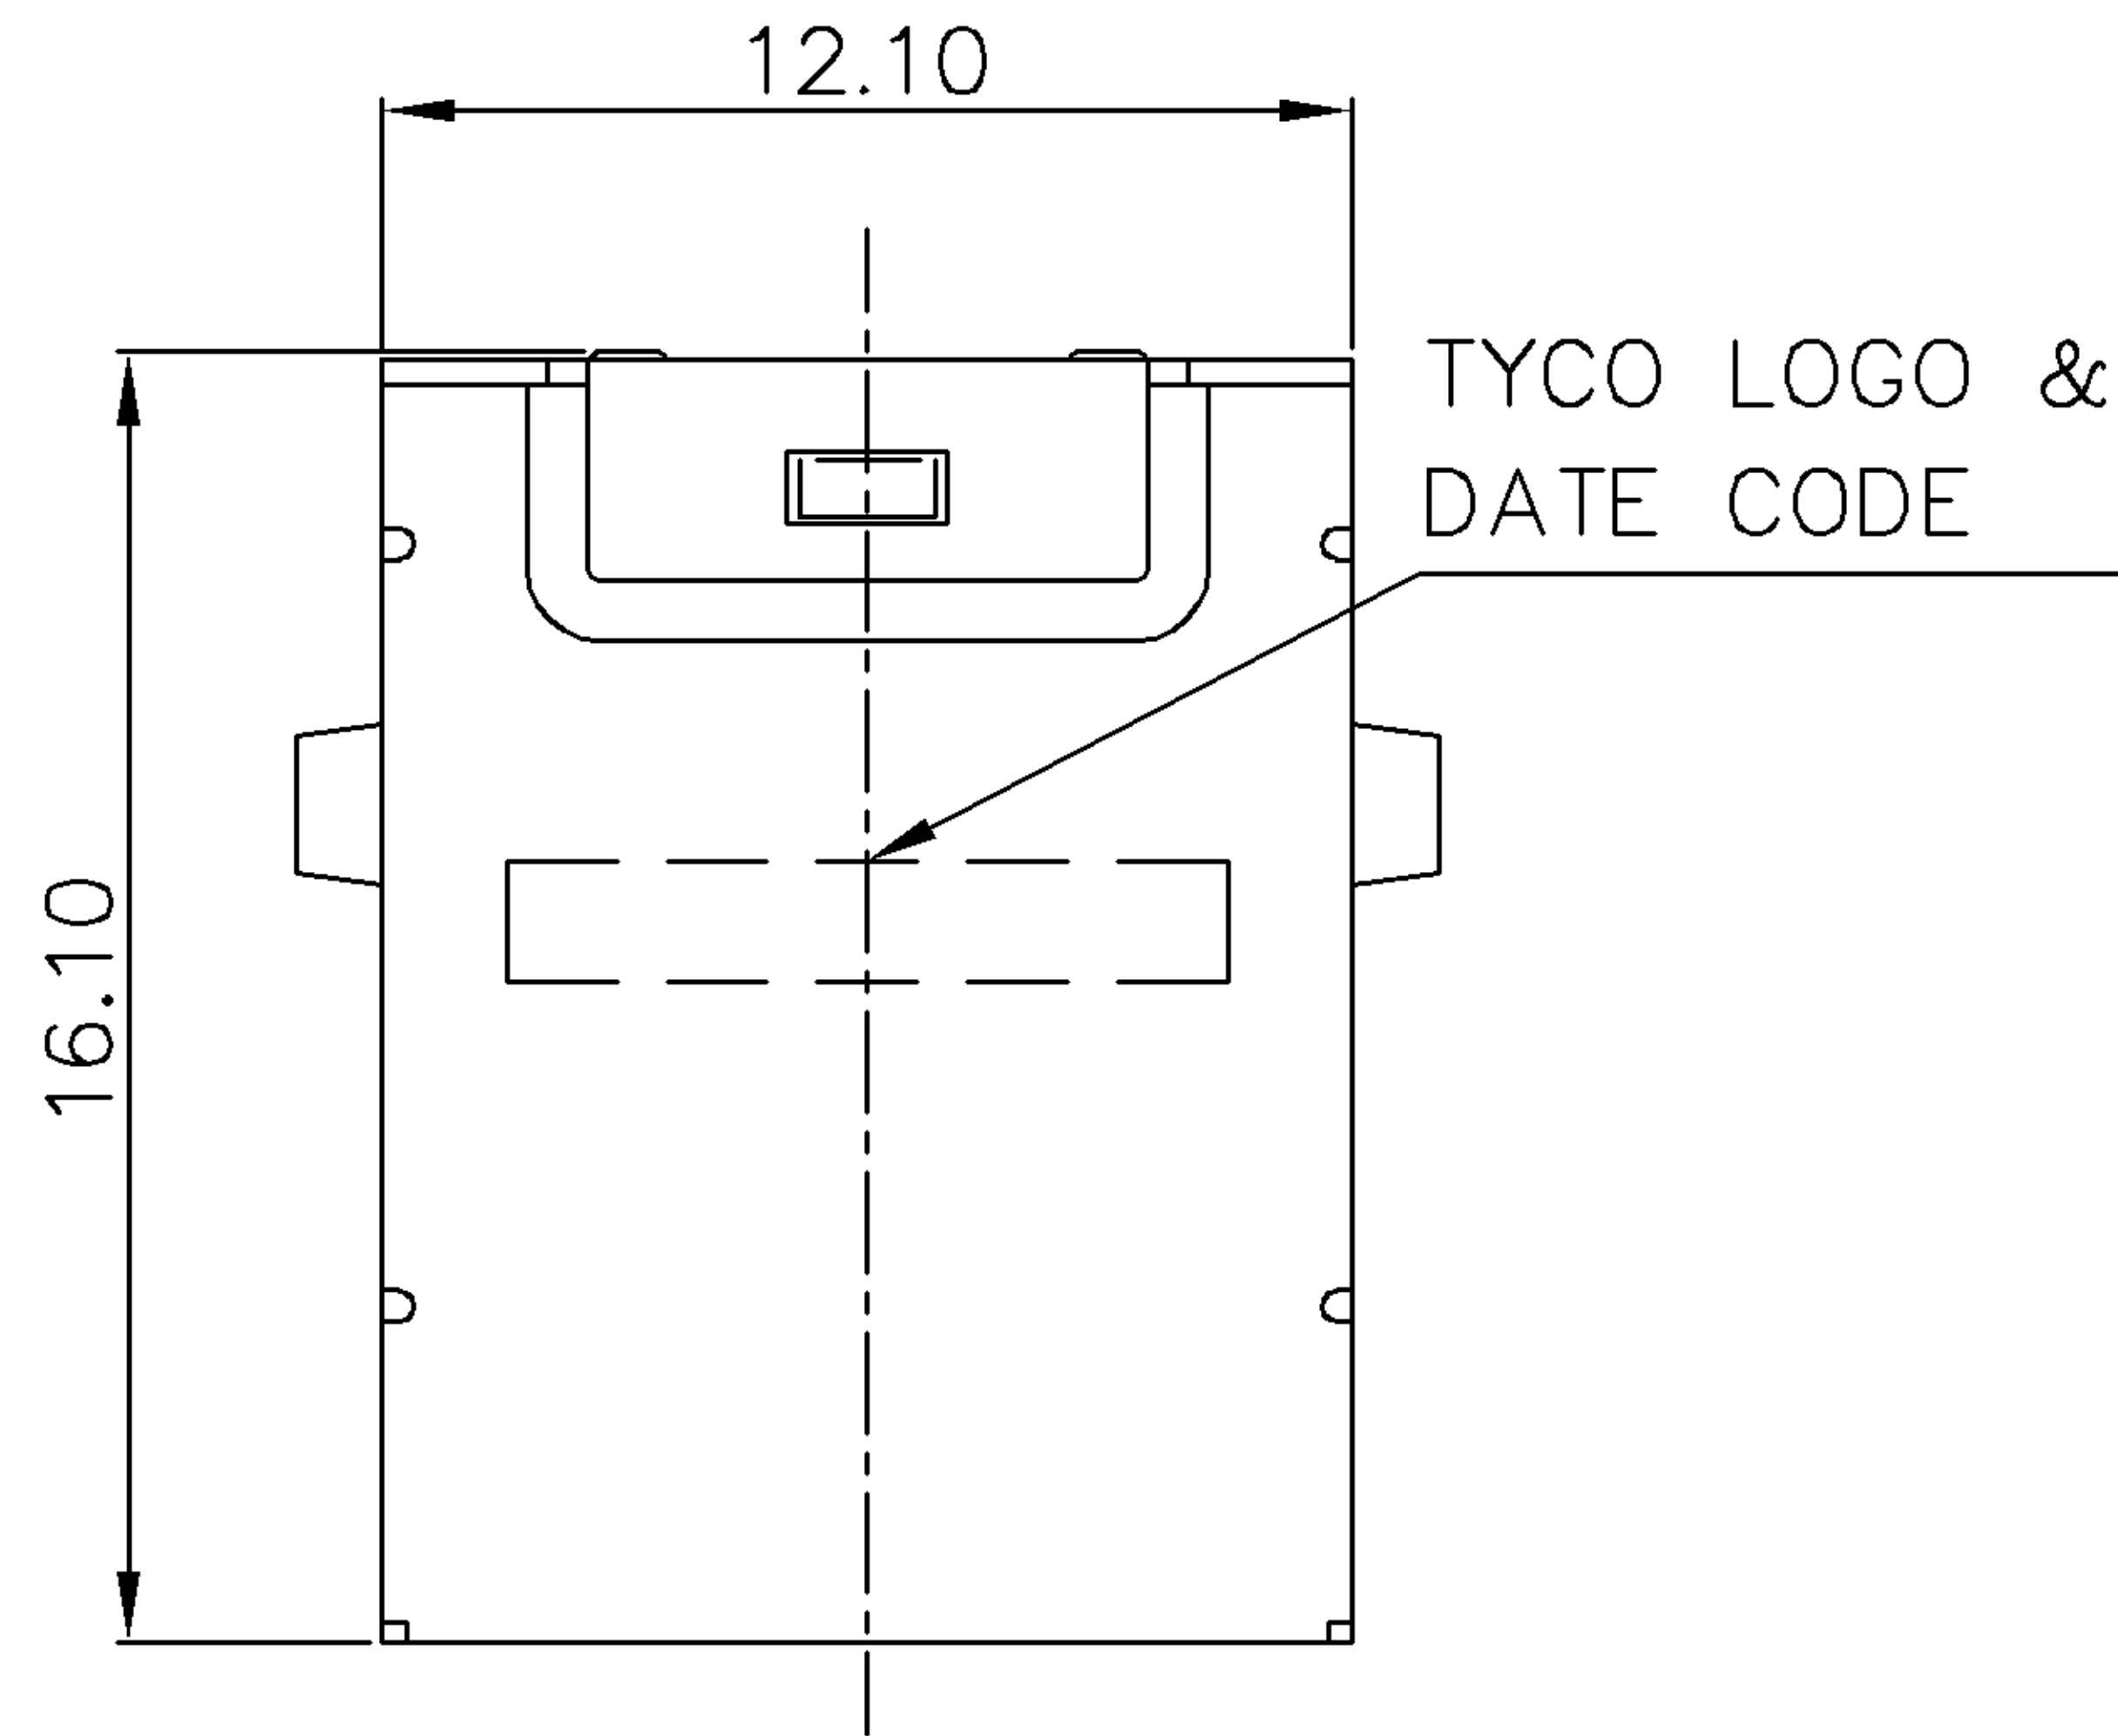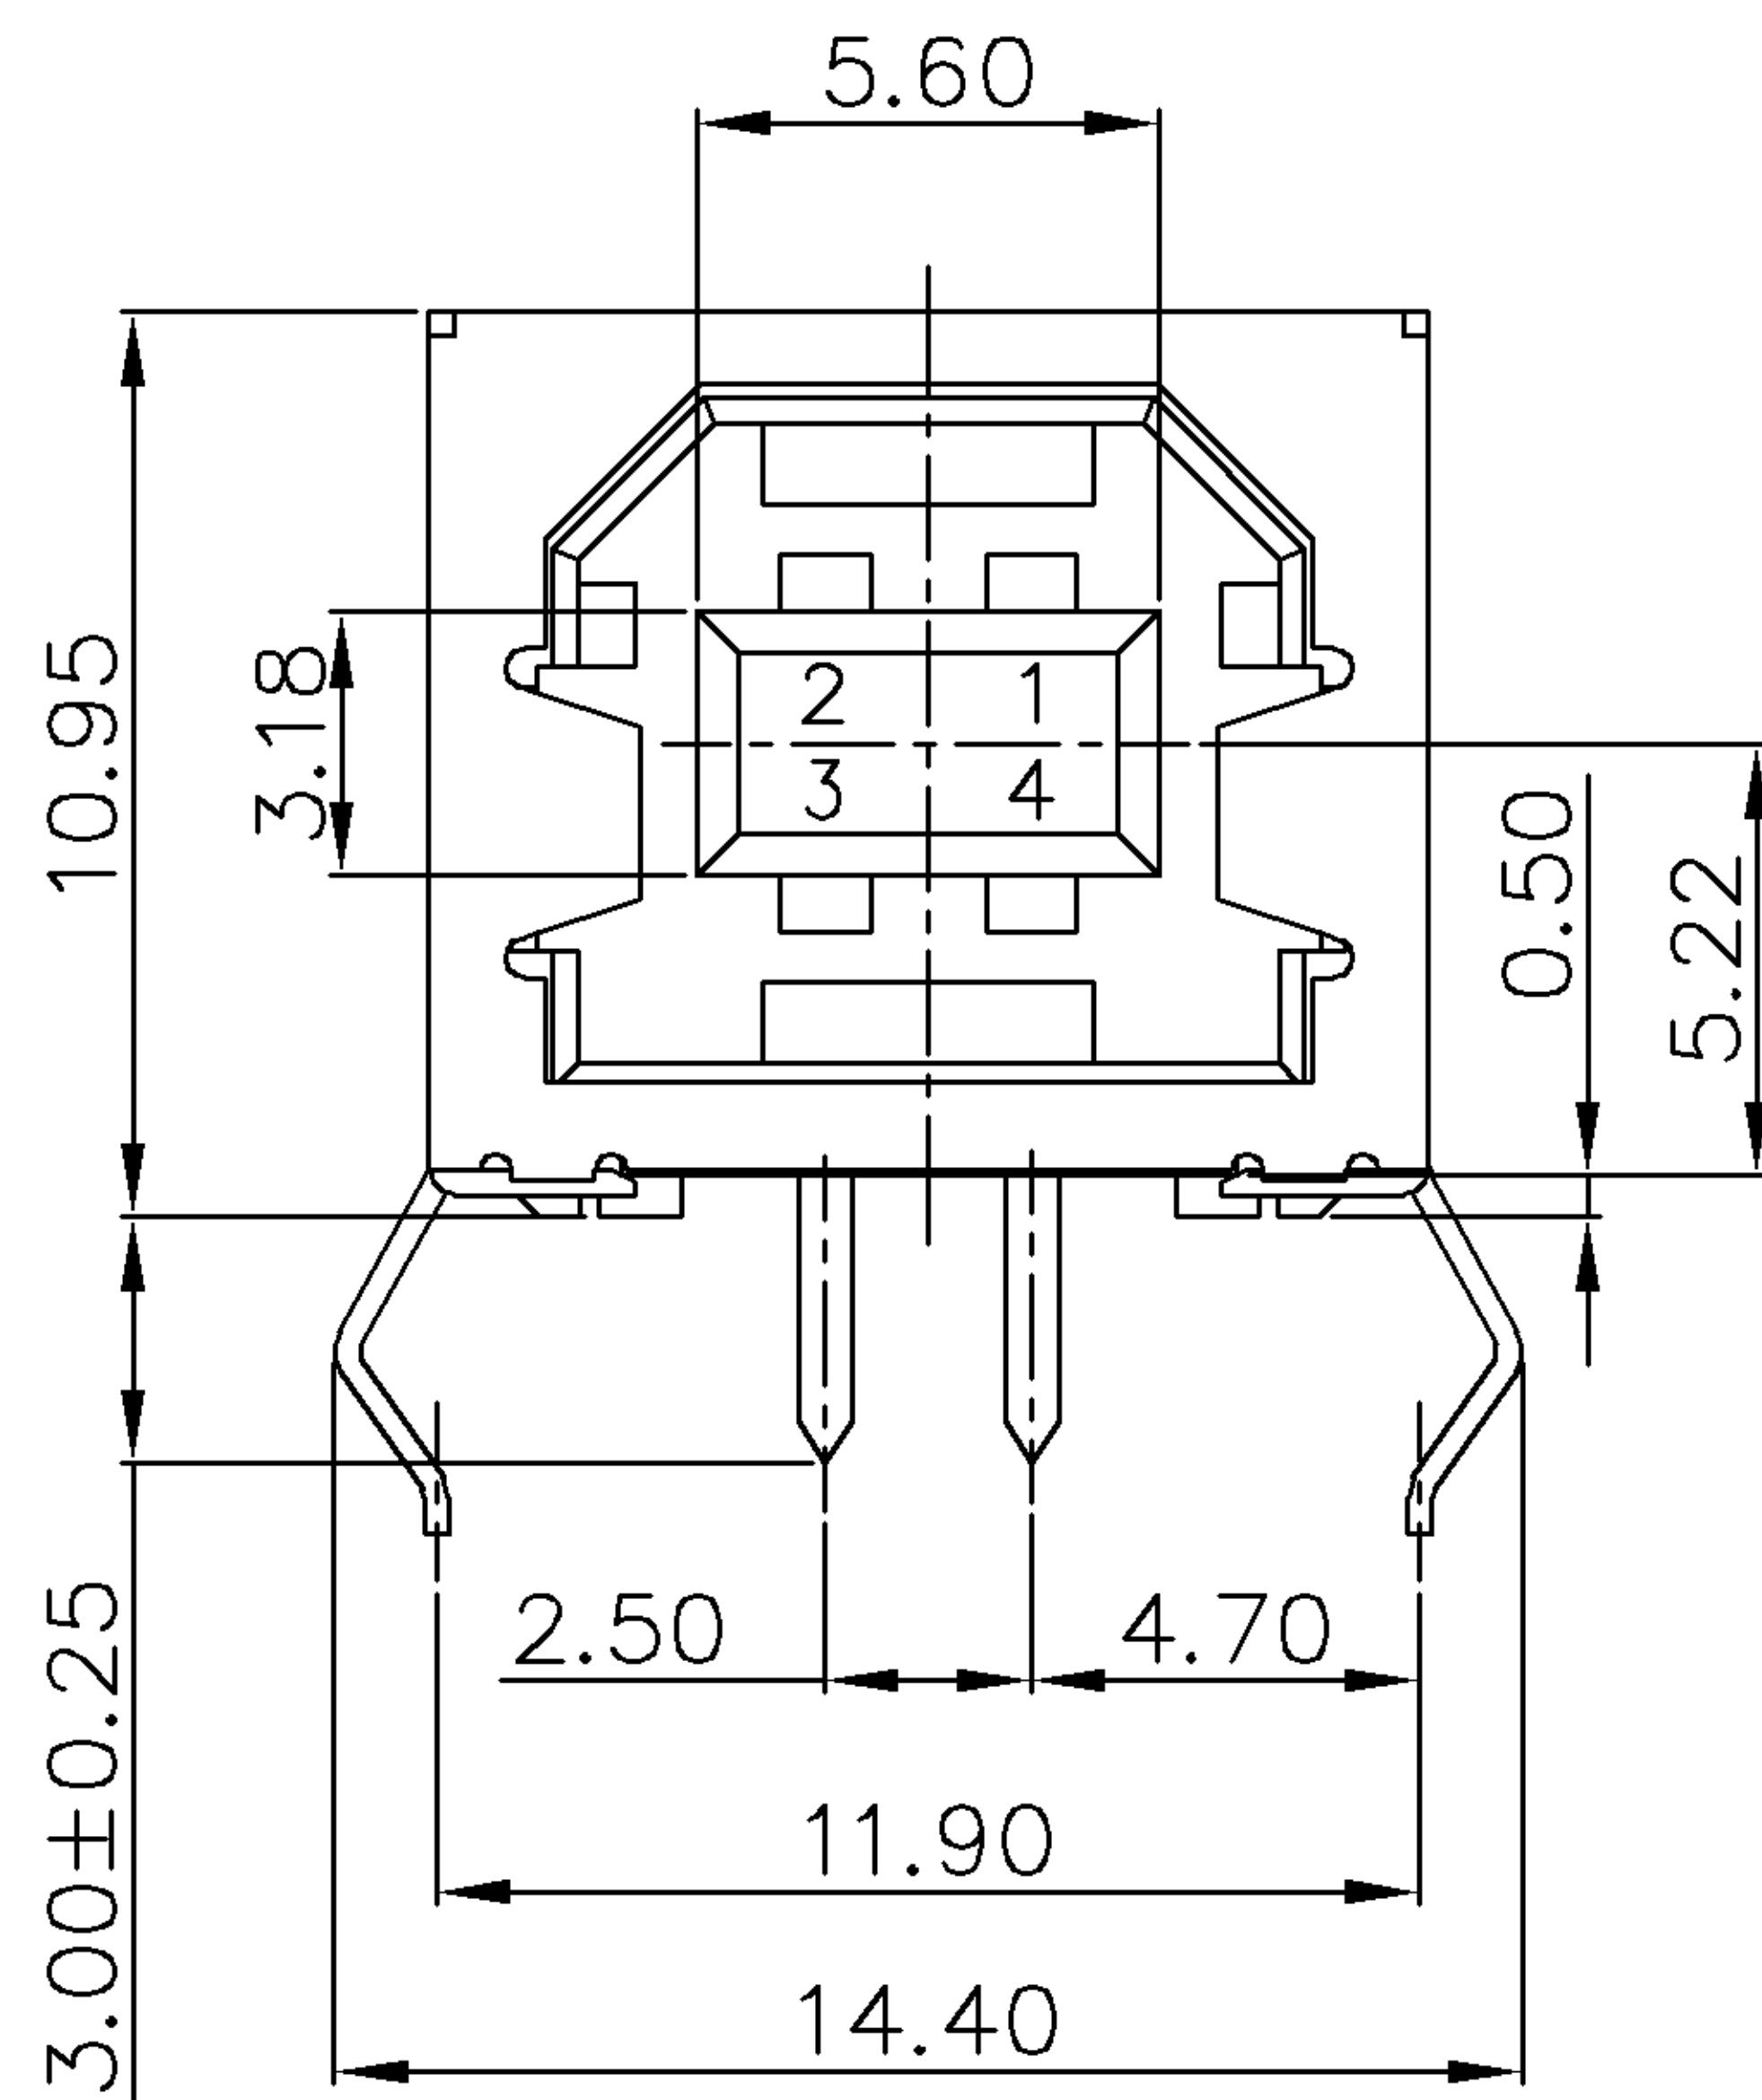


- NOTES:
- MATERIAL:
HOUSING : THERMOPLASTIC(SEE TABLE), WITH 30% GLASS FIBER FILLED. UL 94V-0 RATED. COLOR:(SEE TABLE).
CONTACT: PHOSPHOR BRONZE.(t=0.25mm).
SHIELD: BRASS OR PHOSPHOR BRONZE (t=0.30mm).
 - FINISH :
CONTACT: 30μ" MIN. GOLD PLATING ON CONTACT AREA.
150μ" MIN. BRIGHT TIN PLATING ON SOLDER TAILS
50μ" MIN. NICKEL UNDERPLATING OVERALL
SHIELD: 120μ" MIN. NICKEL PLATING
50μ" MIN. Cu UNDER PLATING OVERALL
- ⚠ REFLOW SOLDER CAPABLE TO 260°C PER TYCO SPEC 109-201, CONDITION B.
- ⚠ WAVE SOLDER CAPABLE TO 240°C PER TYCO SPEC109-201, CONDITION A.

Ø2.30±0.10
Ø Ø0.05 (M)
2 PLC

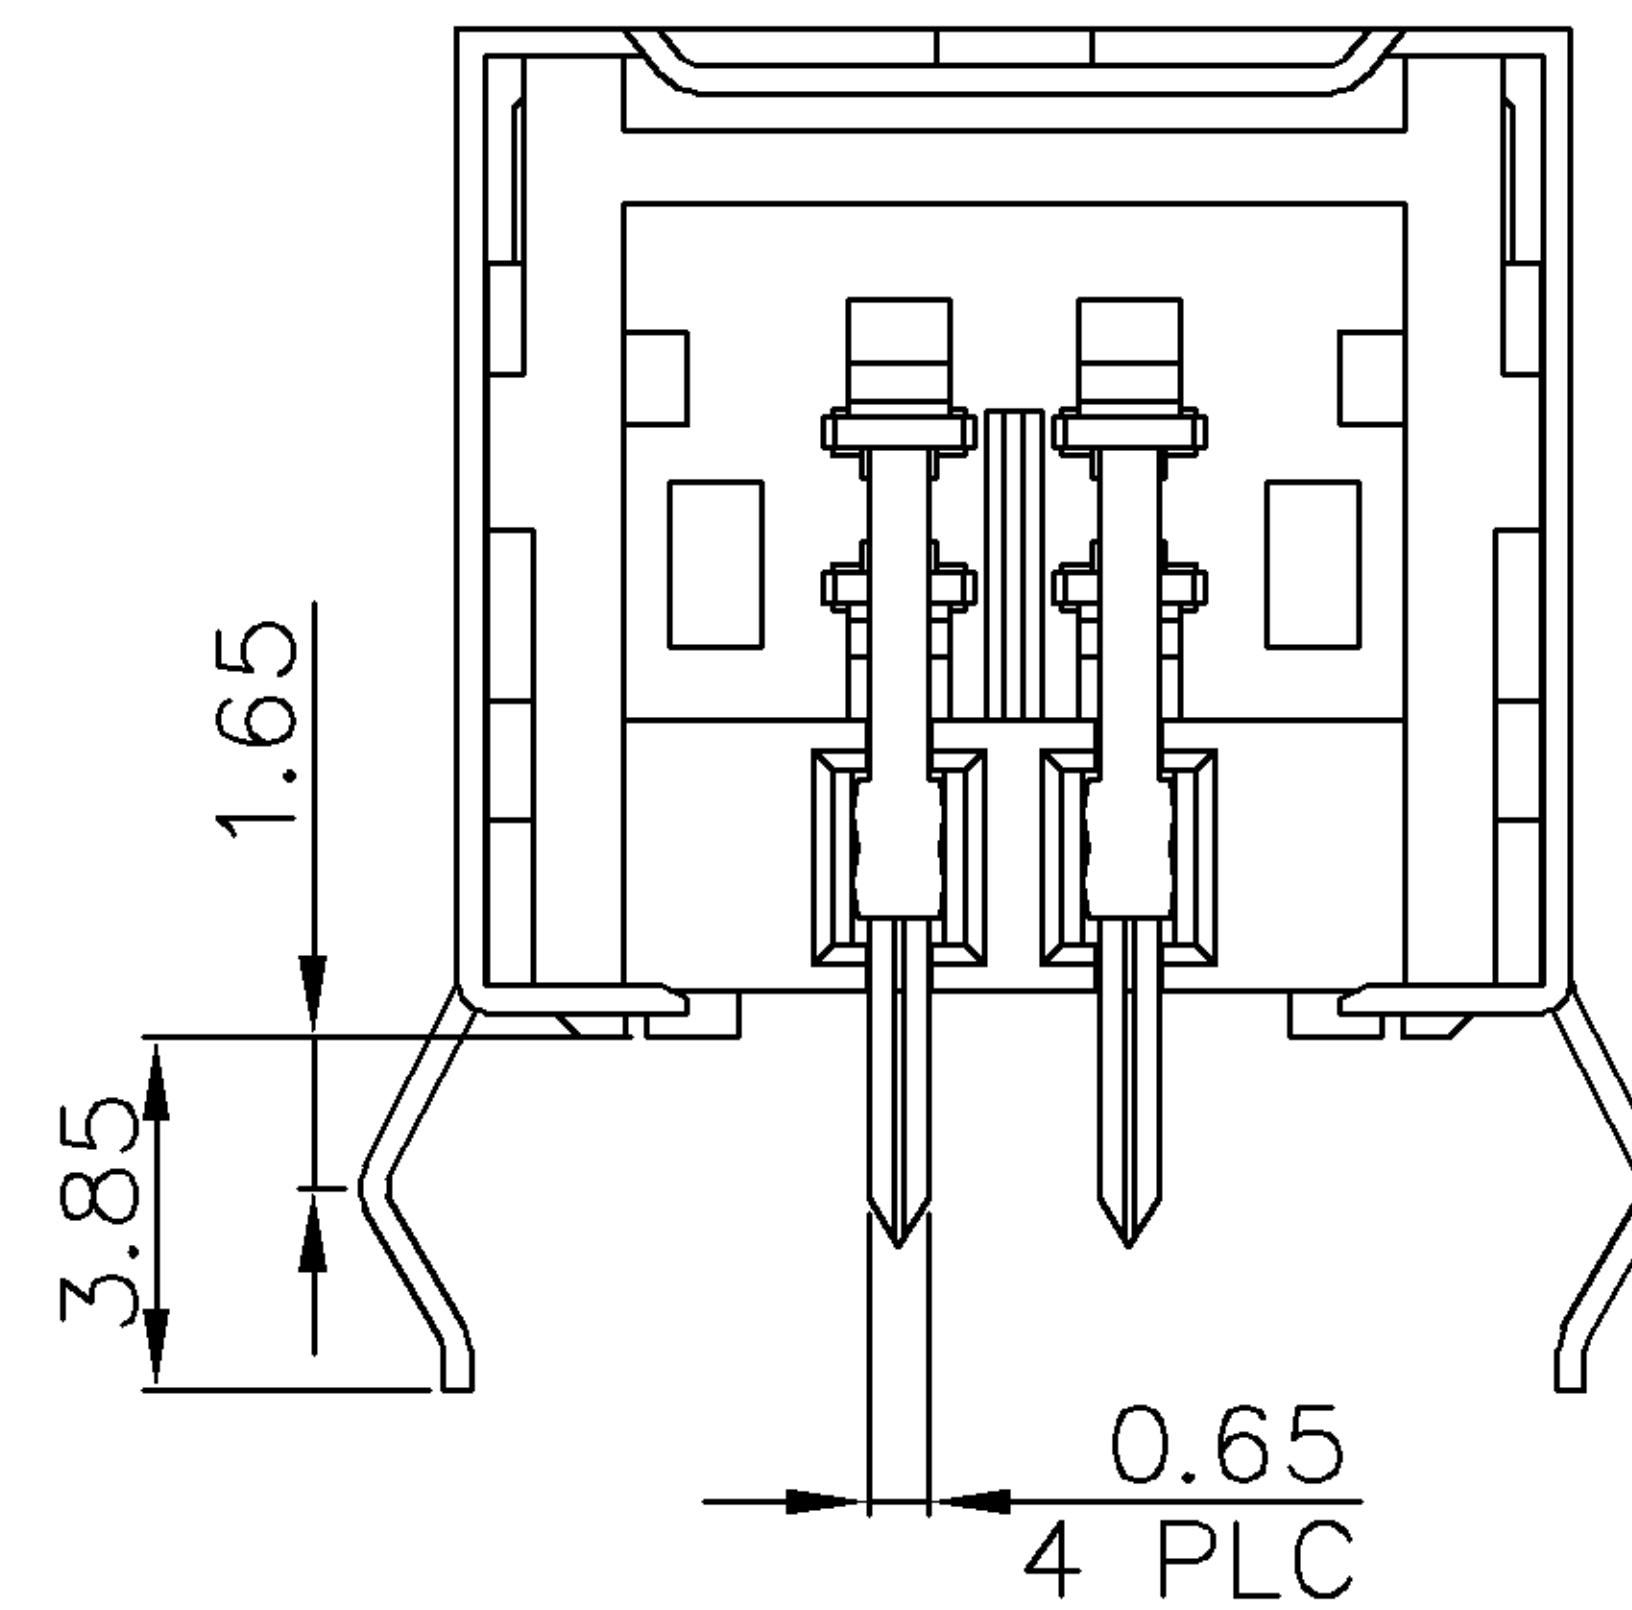

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(TOP VIEW) TOLERANCE±0.05

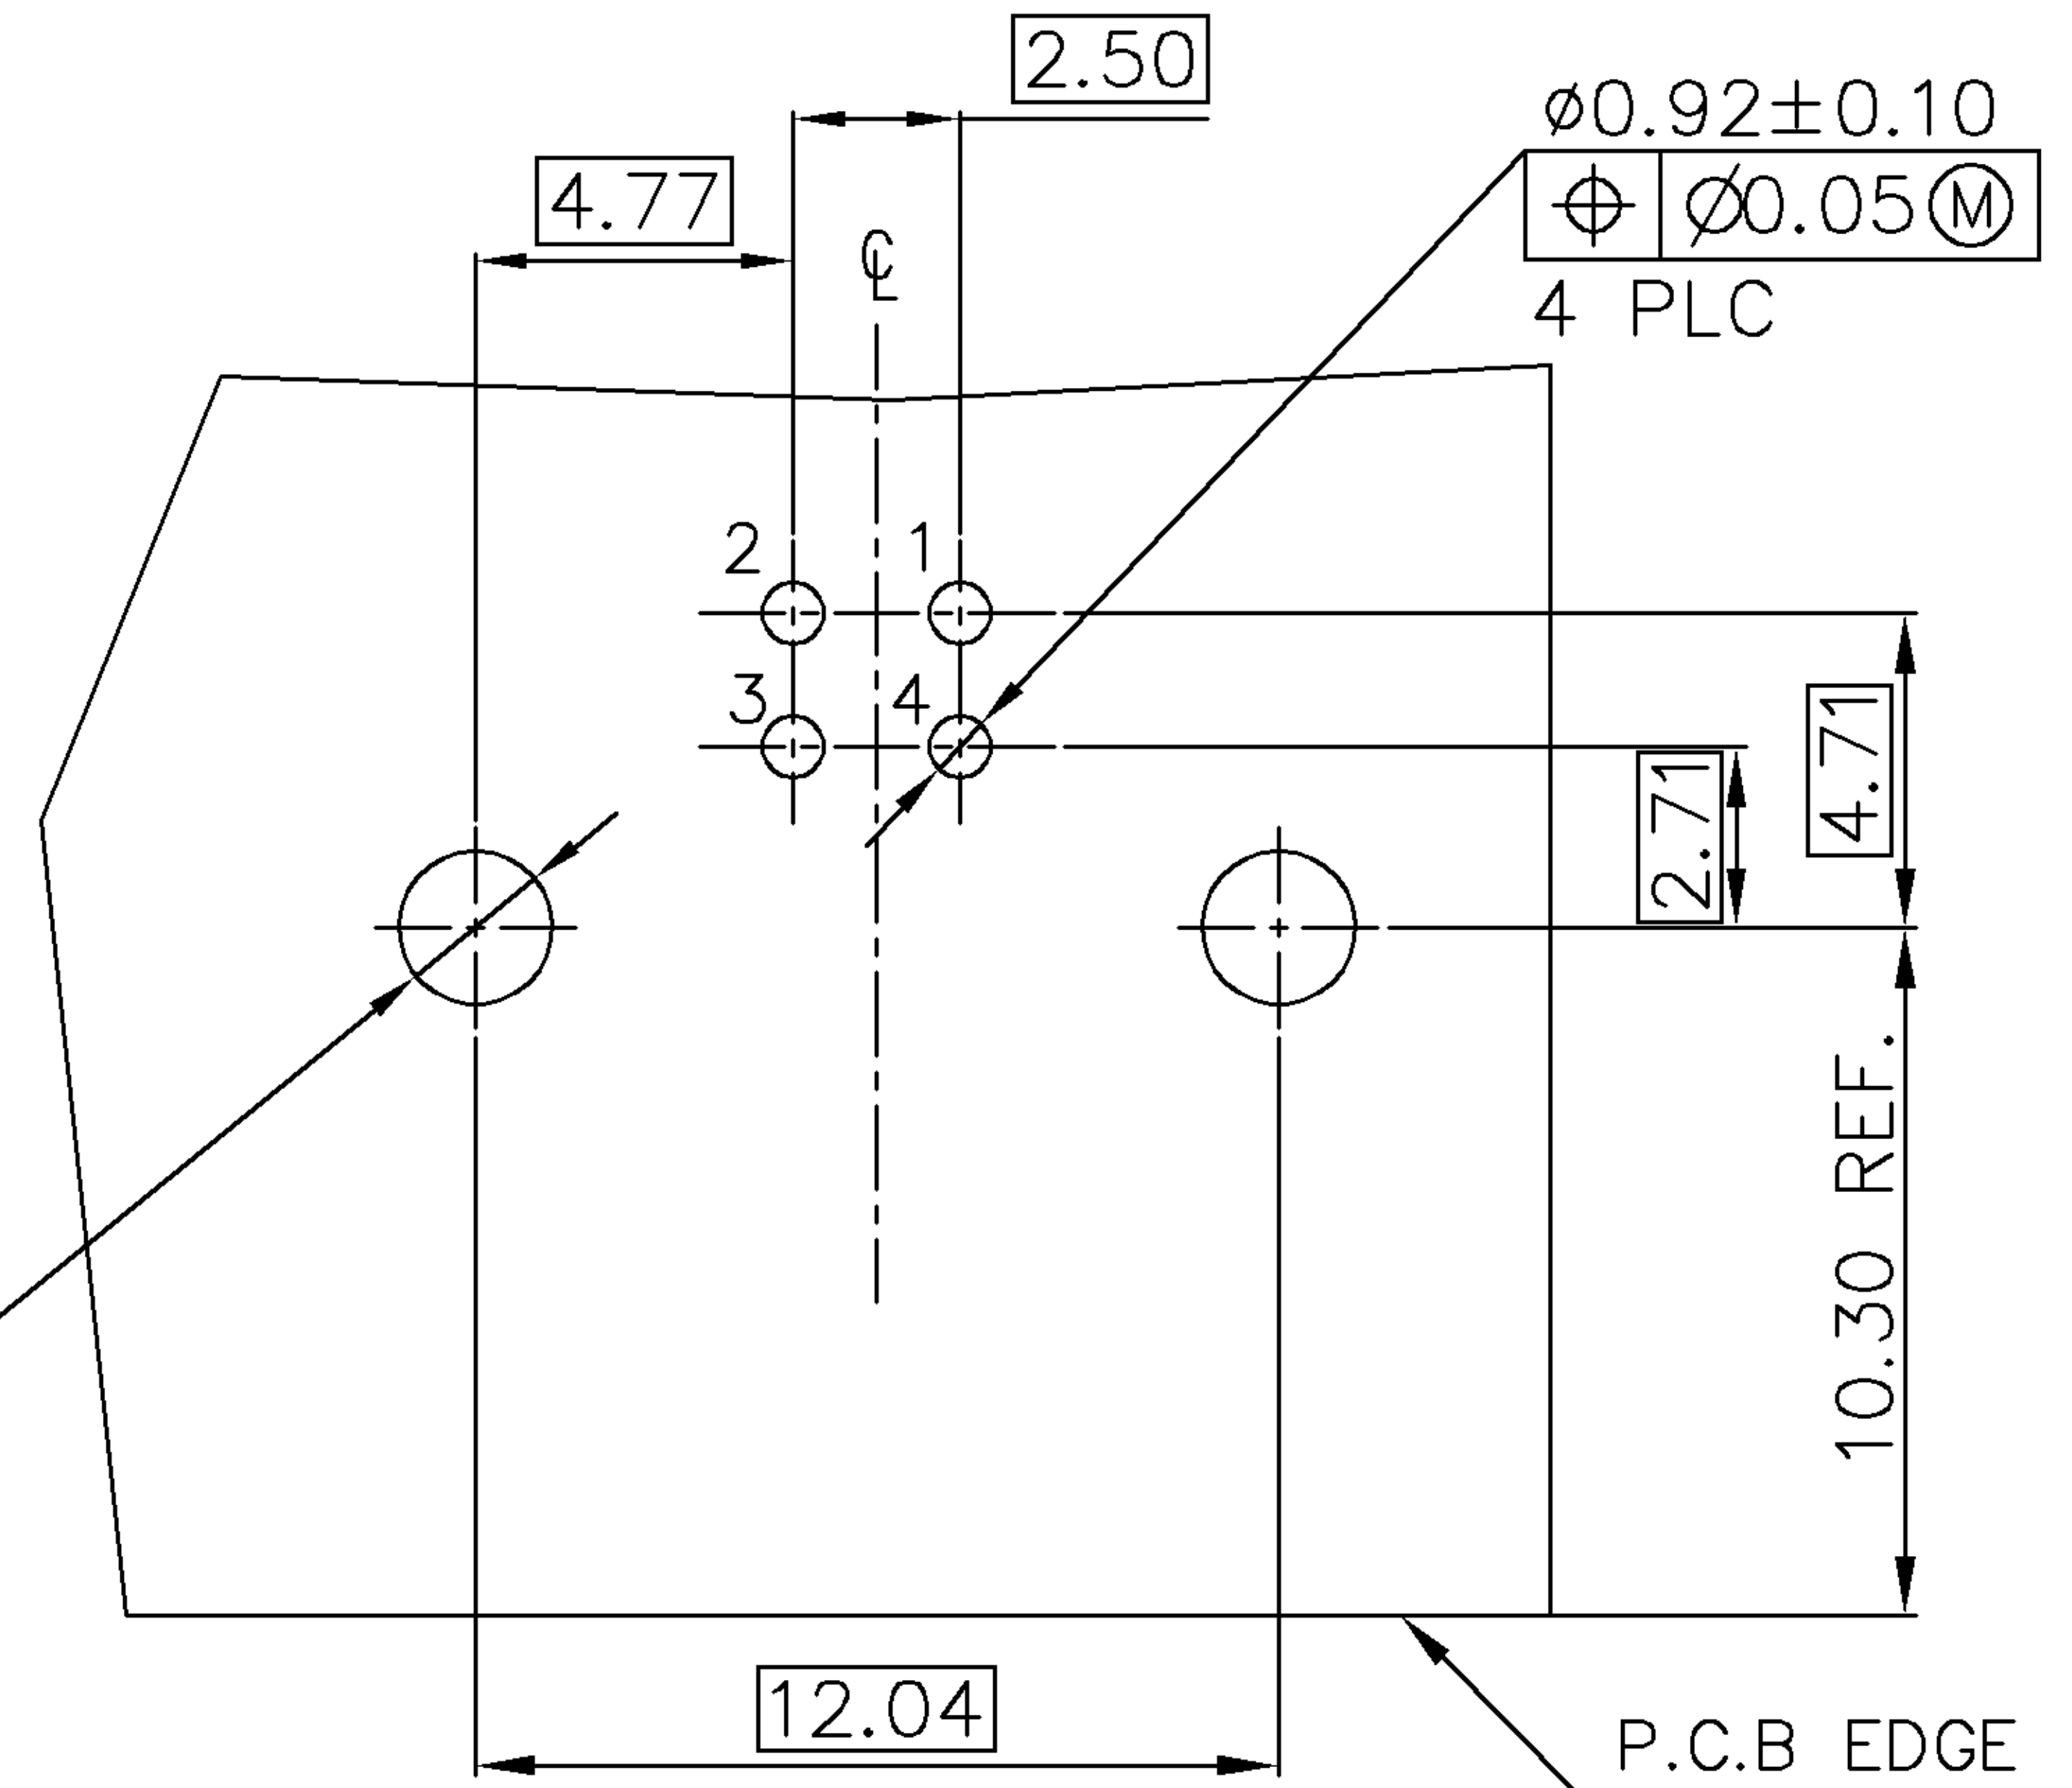

BLUE PANTONE (285C)	⚠ PA46	0-1734086-4
WHITE	⚠ PA46	0-1734086-3
BLACK	⚠ PA46	0-1734086-2
WHITE	⚠ PBT	0-1734086-1
COLOR	HSG. MATERIAL	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± ANGLES ±3°	DWN O. HU 20-SEP-2005	tyco TYCO HOLDINGS (BERMUDA) Electronics VII LTD. TAIWAN BRANCH		
	CHK S. HOU 20-SEP-2005			
MATERIAL SEE NOTE	APVD W.J. KE 20-SEP-2005	USB CONNECTOR, B TYPE, RIGHT ANGLE		
FINISH SEE NOTE	PRODUCT SPEC 108-57549			
	QUALIFICATION TEST REPORT 501-57681	LOC DW	SIZE A₃	DRAWING NO C-1734086
	WEIGHT 3.62 gram	SCALE --	SHEET 1 OF 4	


O	FIRST RELEASED	FZ00-00XX-02	OH JC 14AUG 2002	
LTR	REVISION RECORD	ECN	DWN CHK DATE	

CUSTOMER DRAWING





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD.
DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

PRINT DIST
DW


METRIC

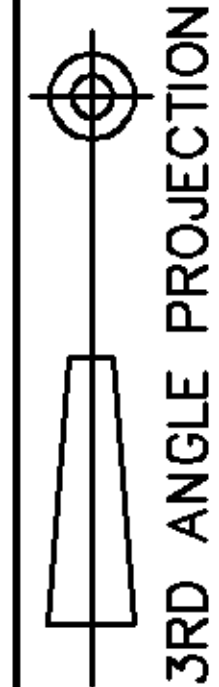

NUMBER
C-1734086

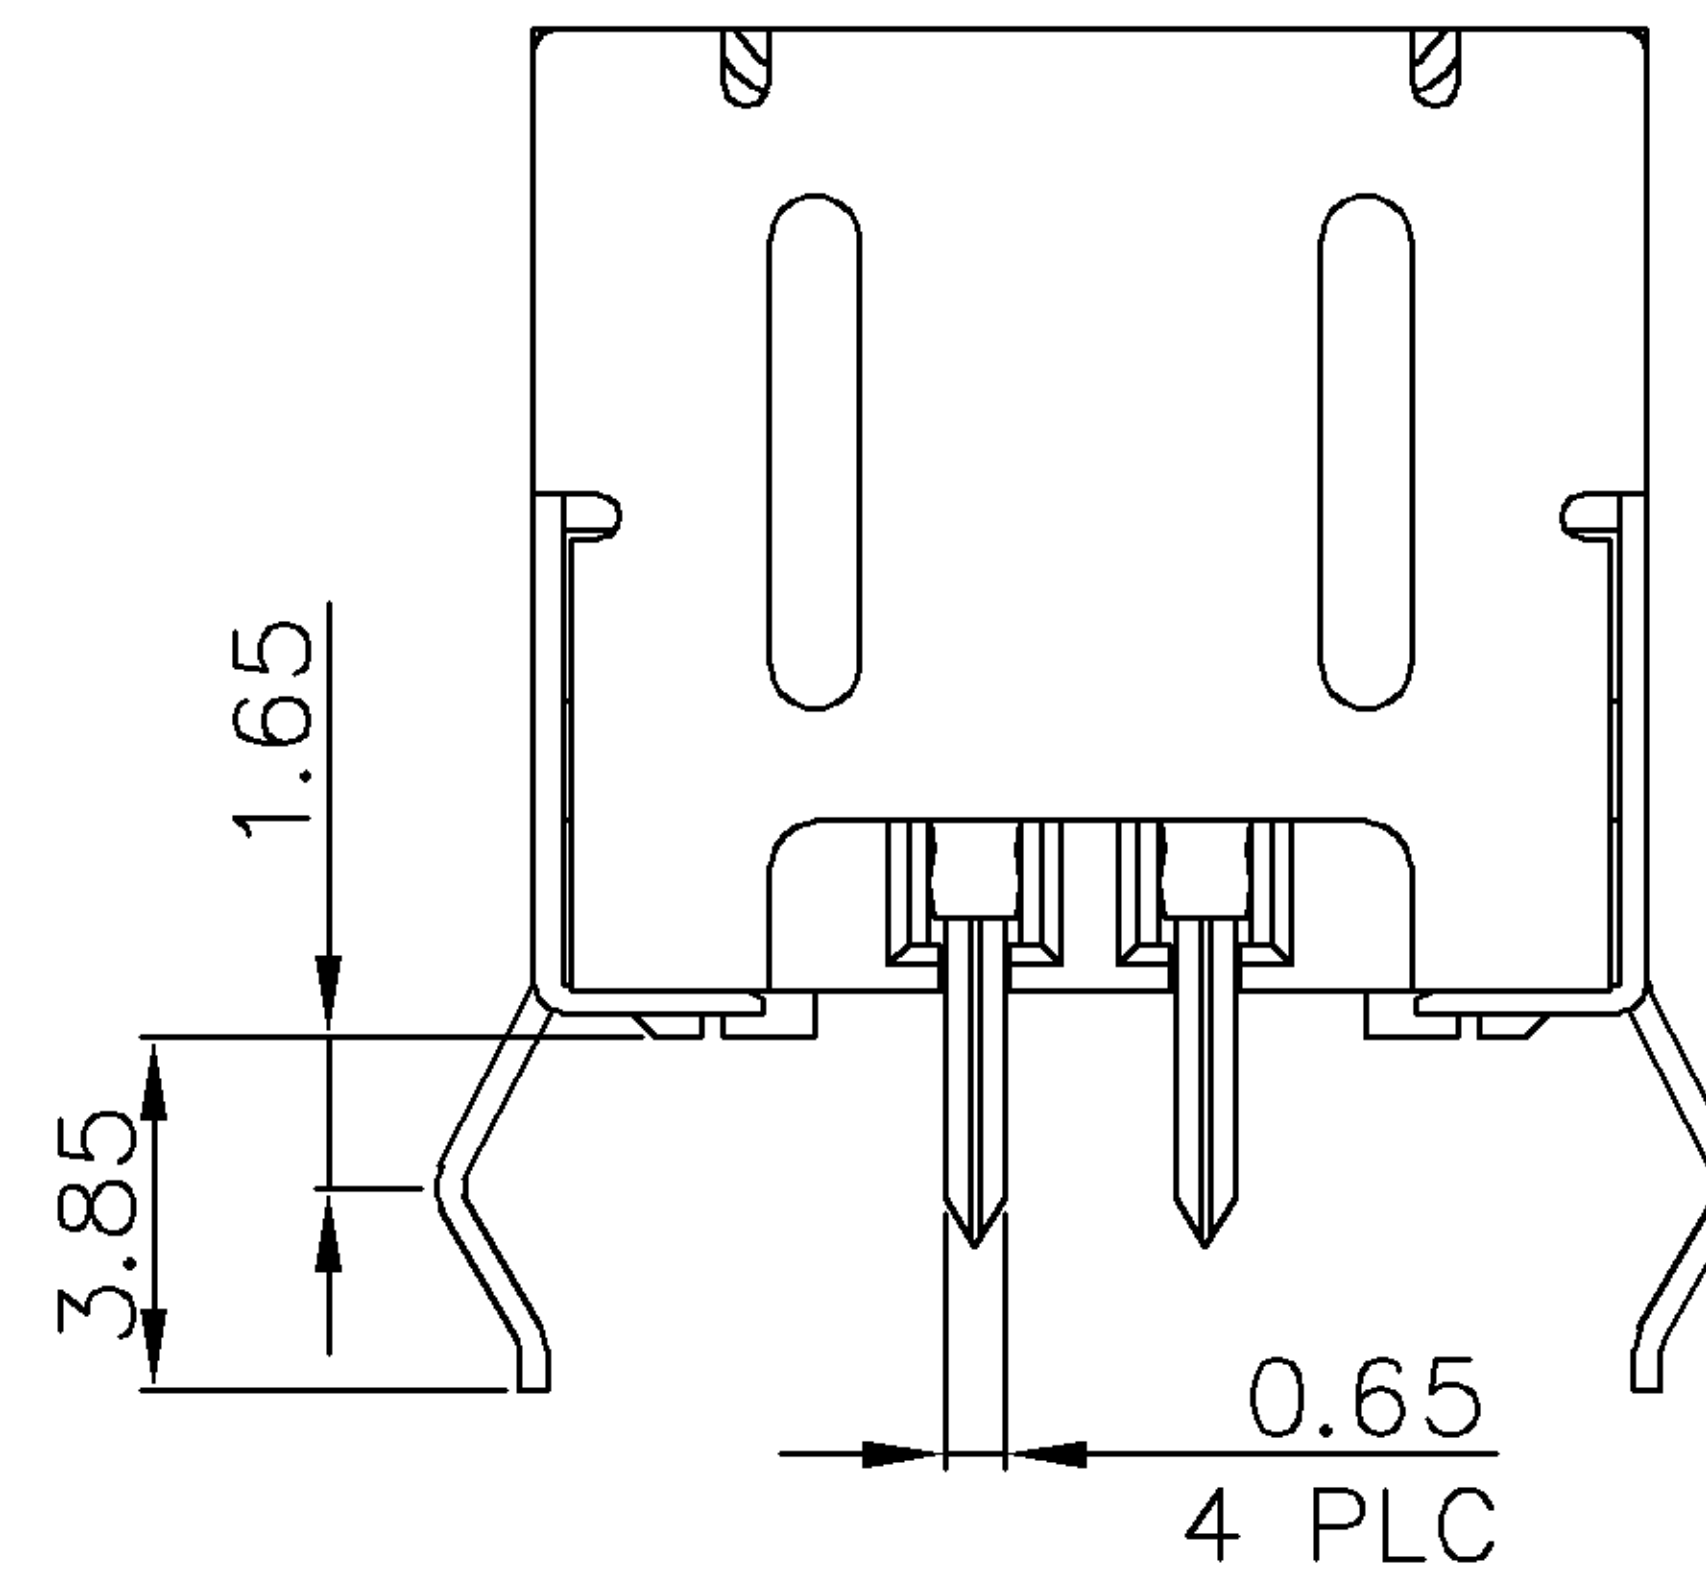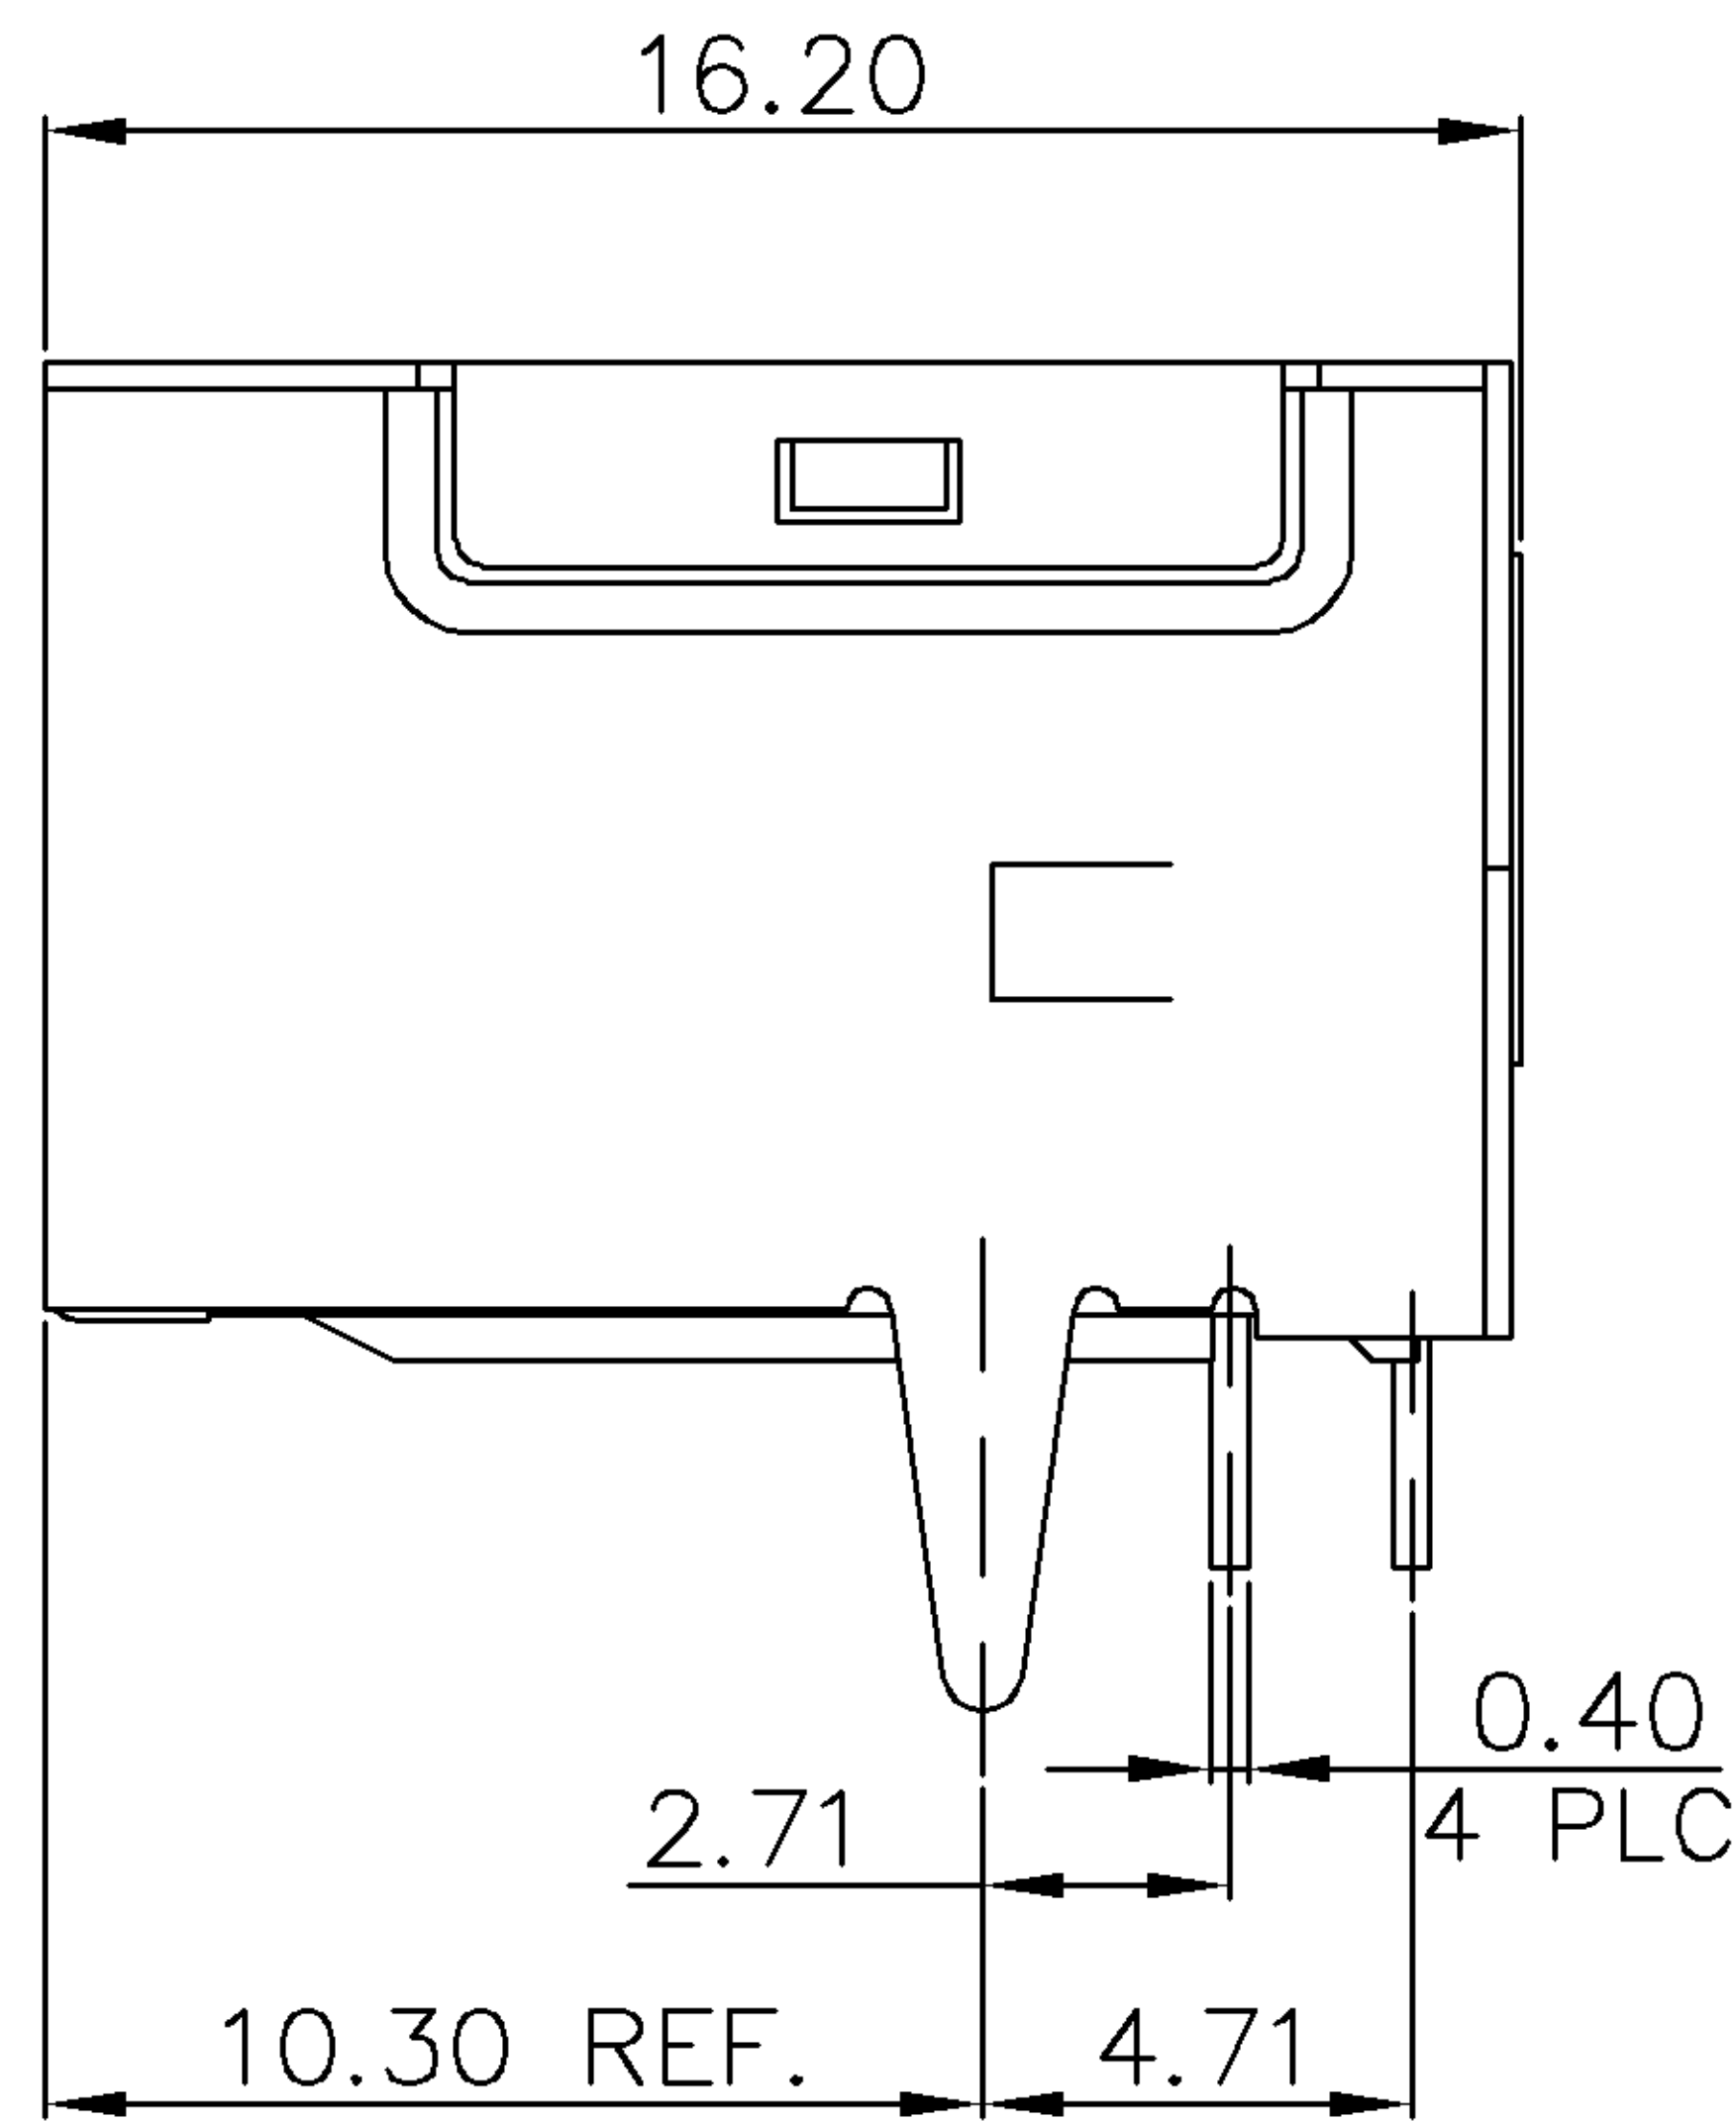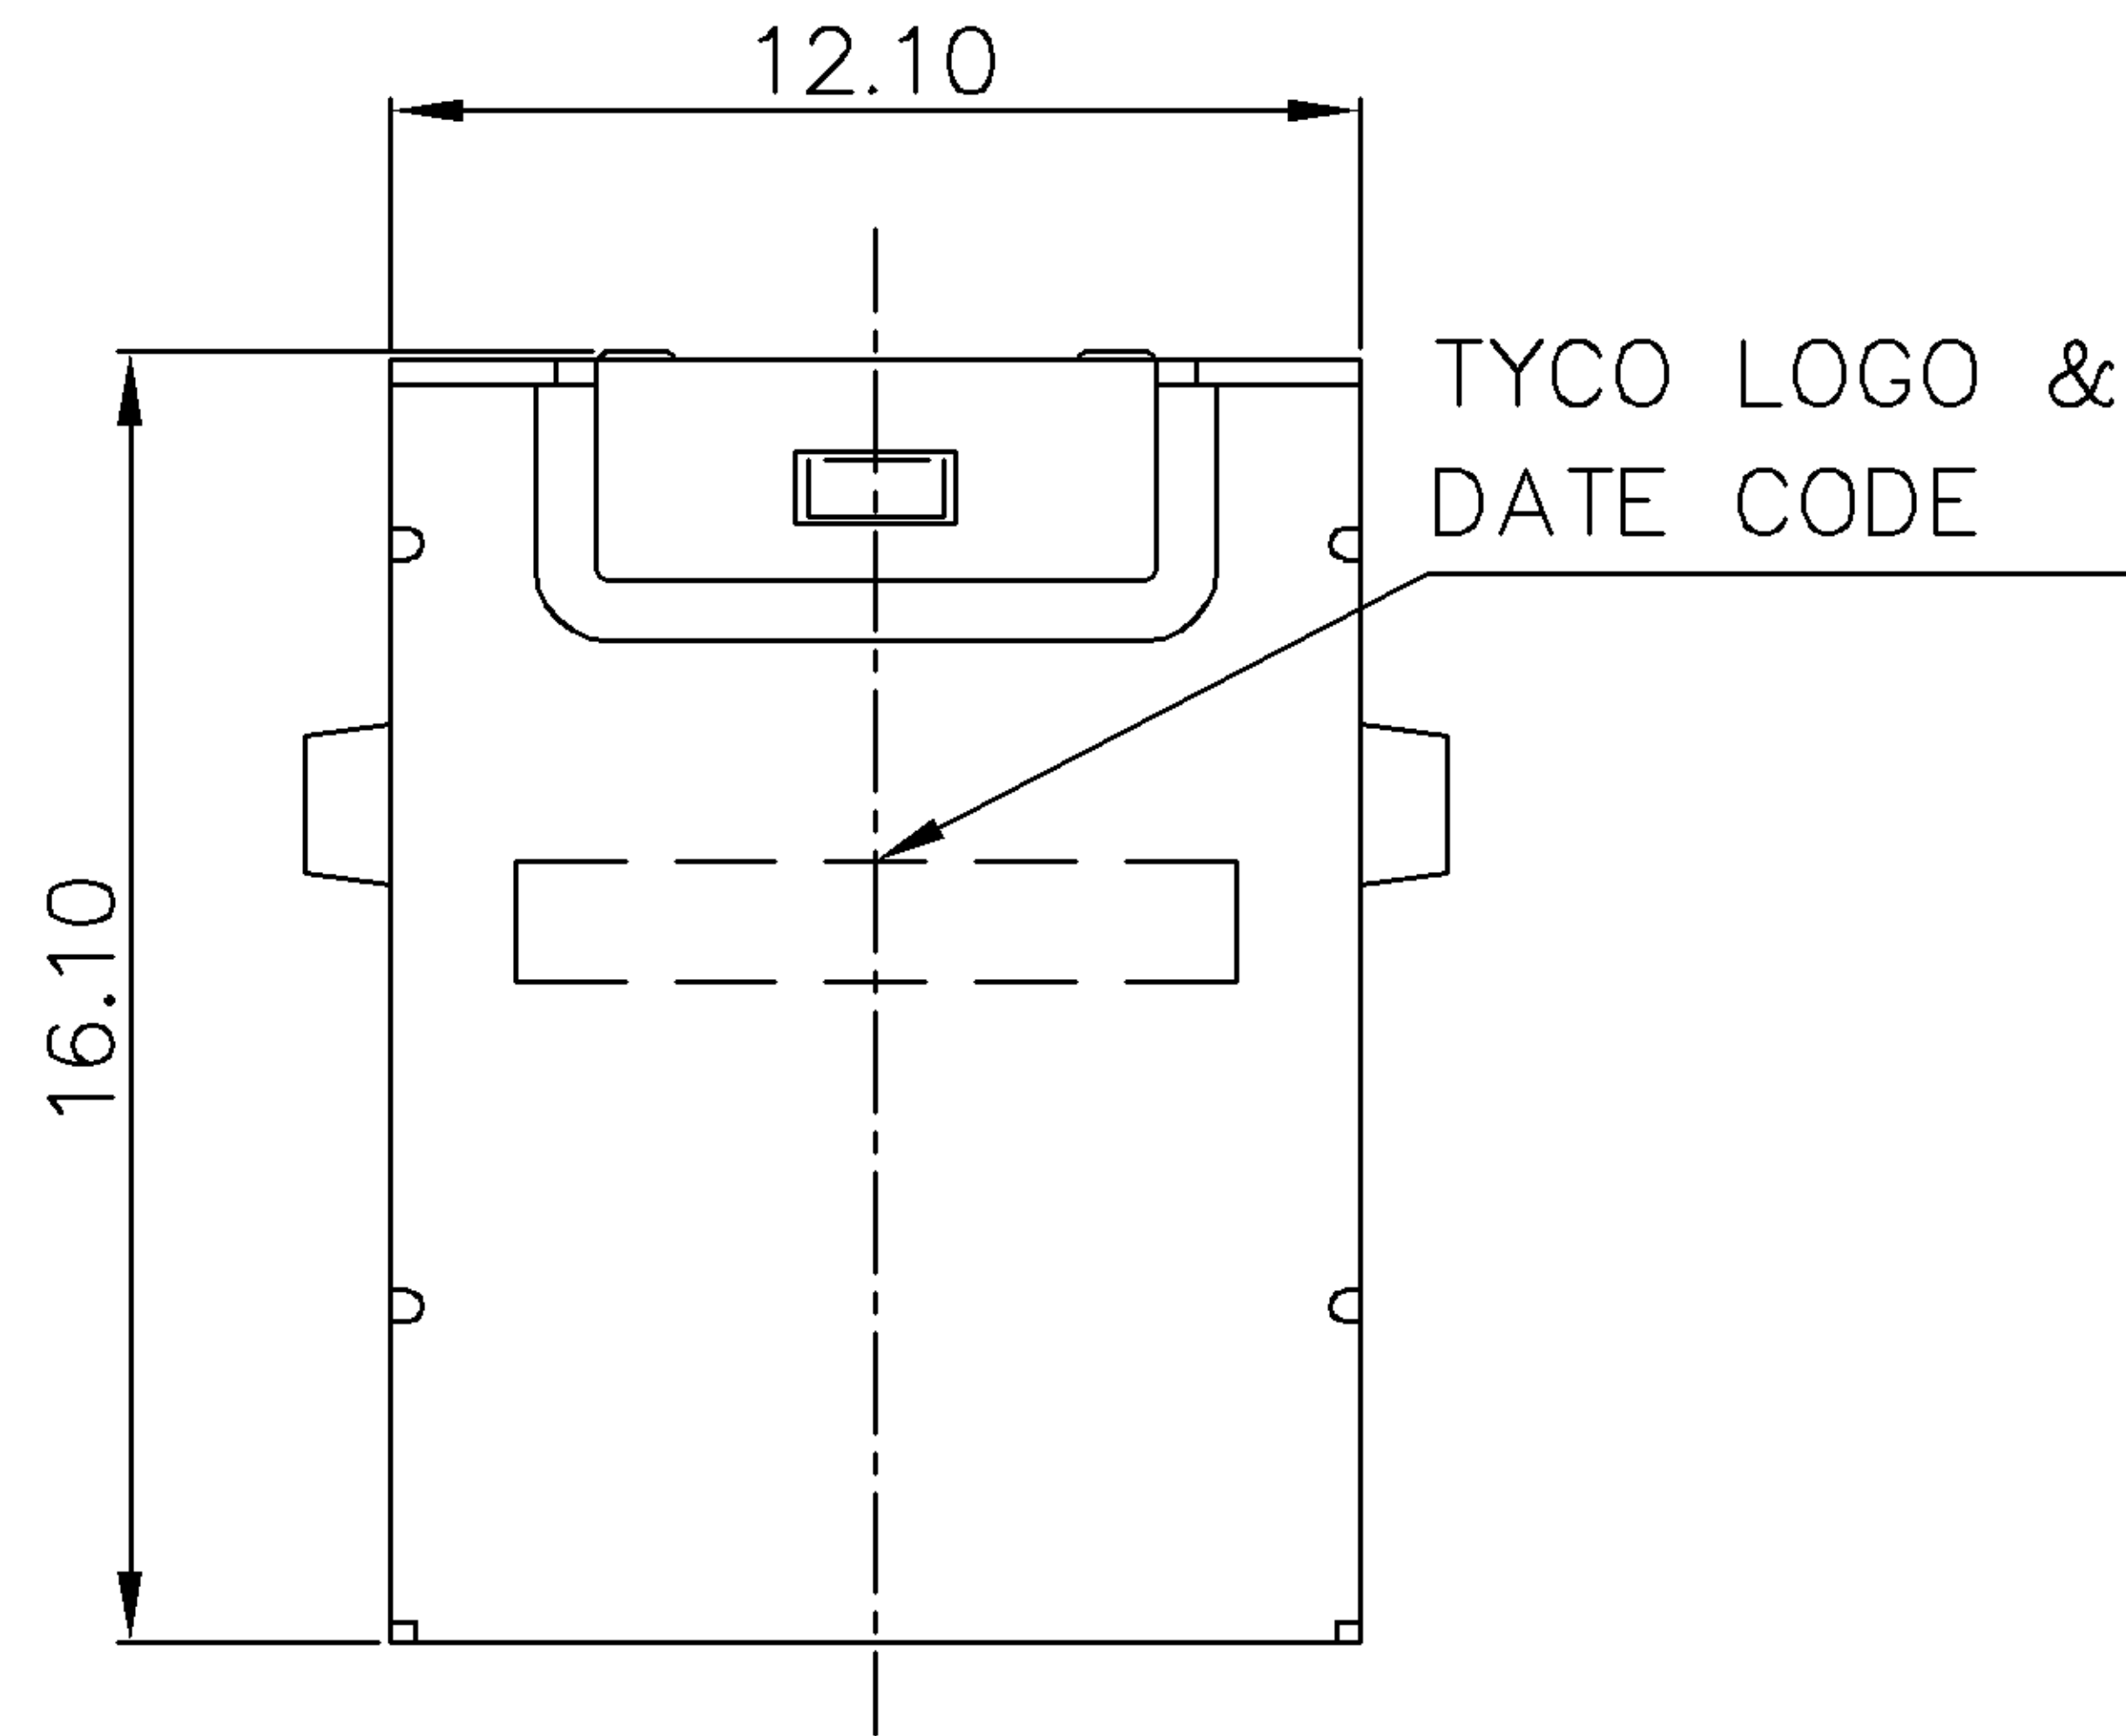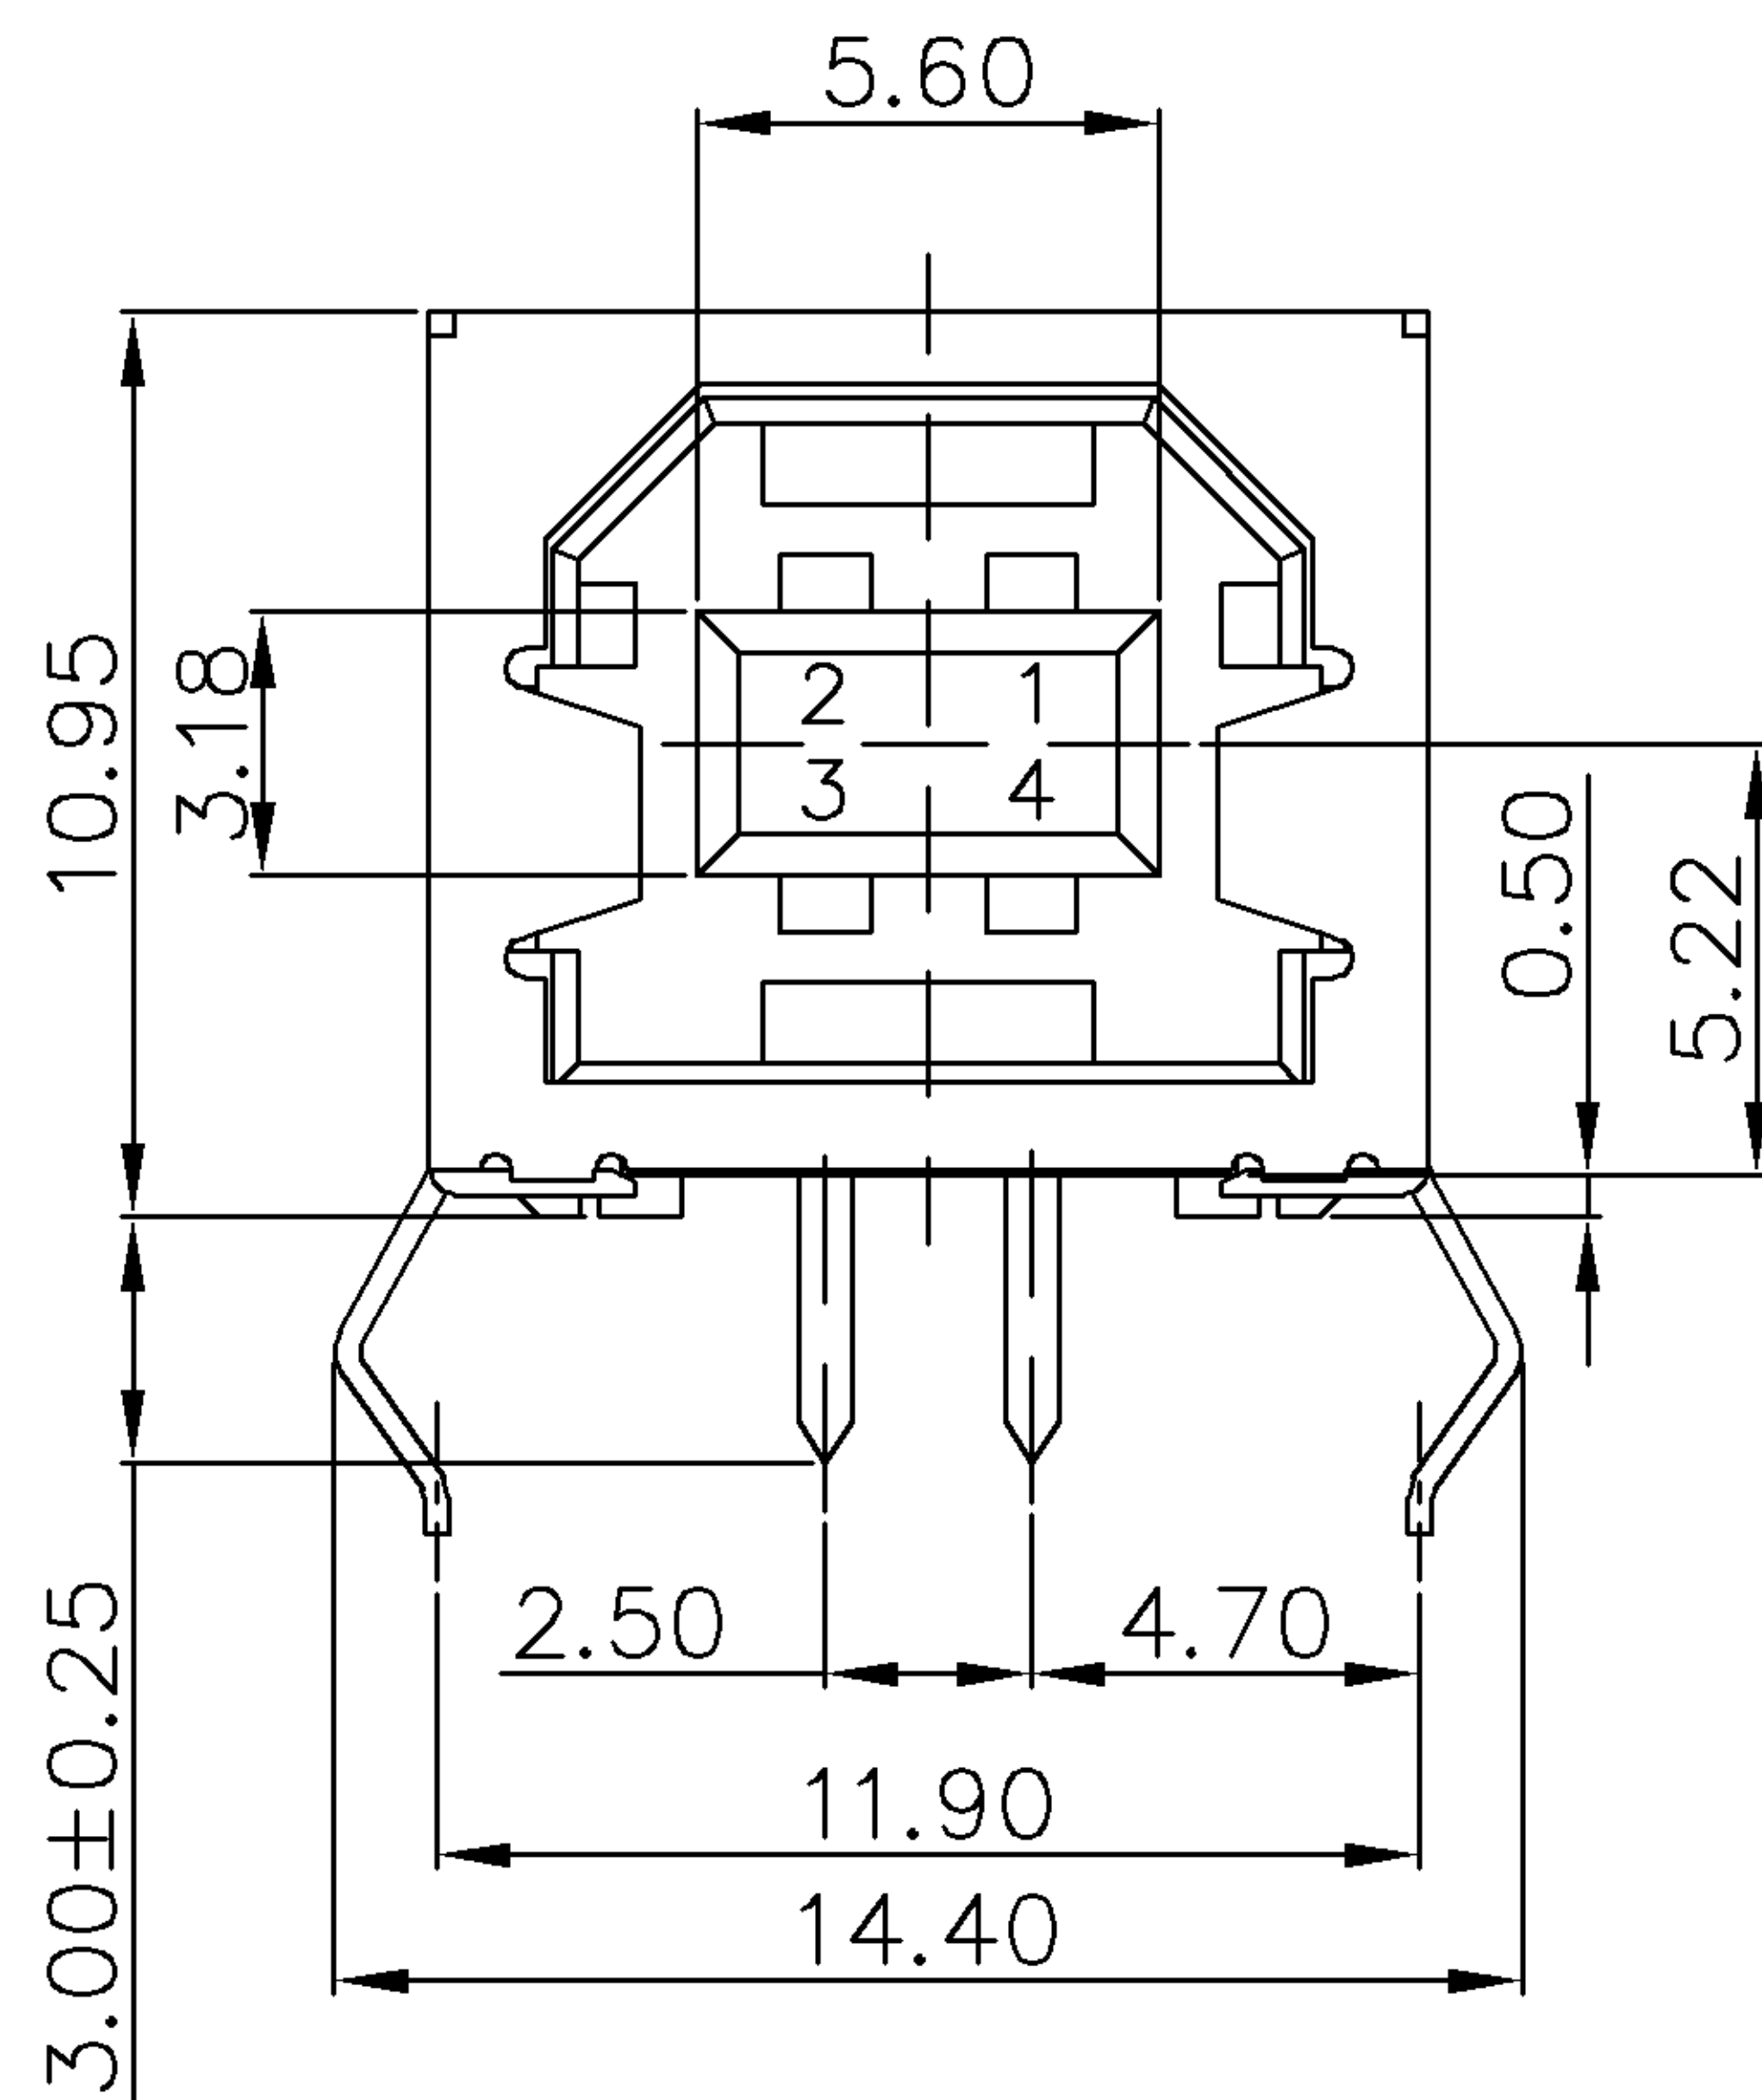

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(TOP VIEW) TOLERANCE±0.05

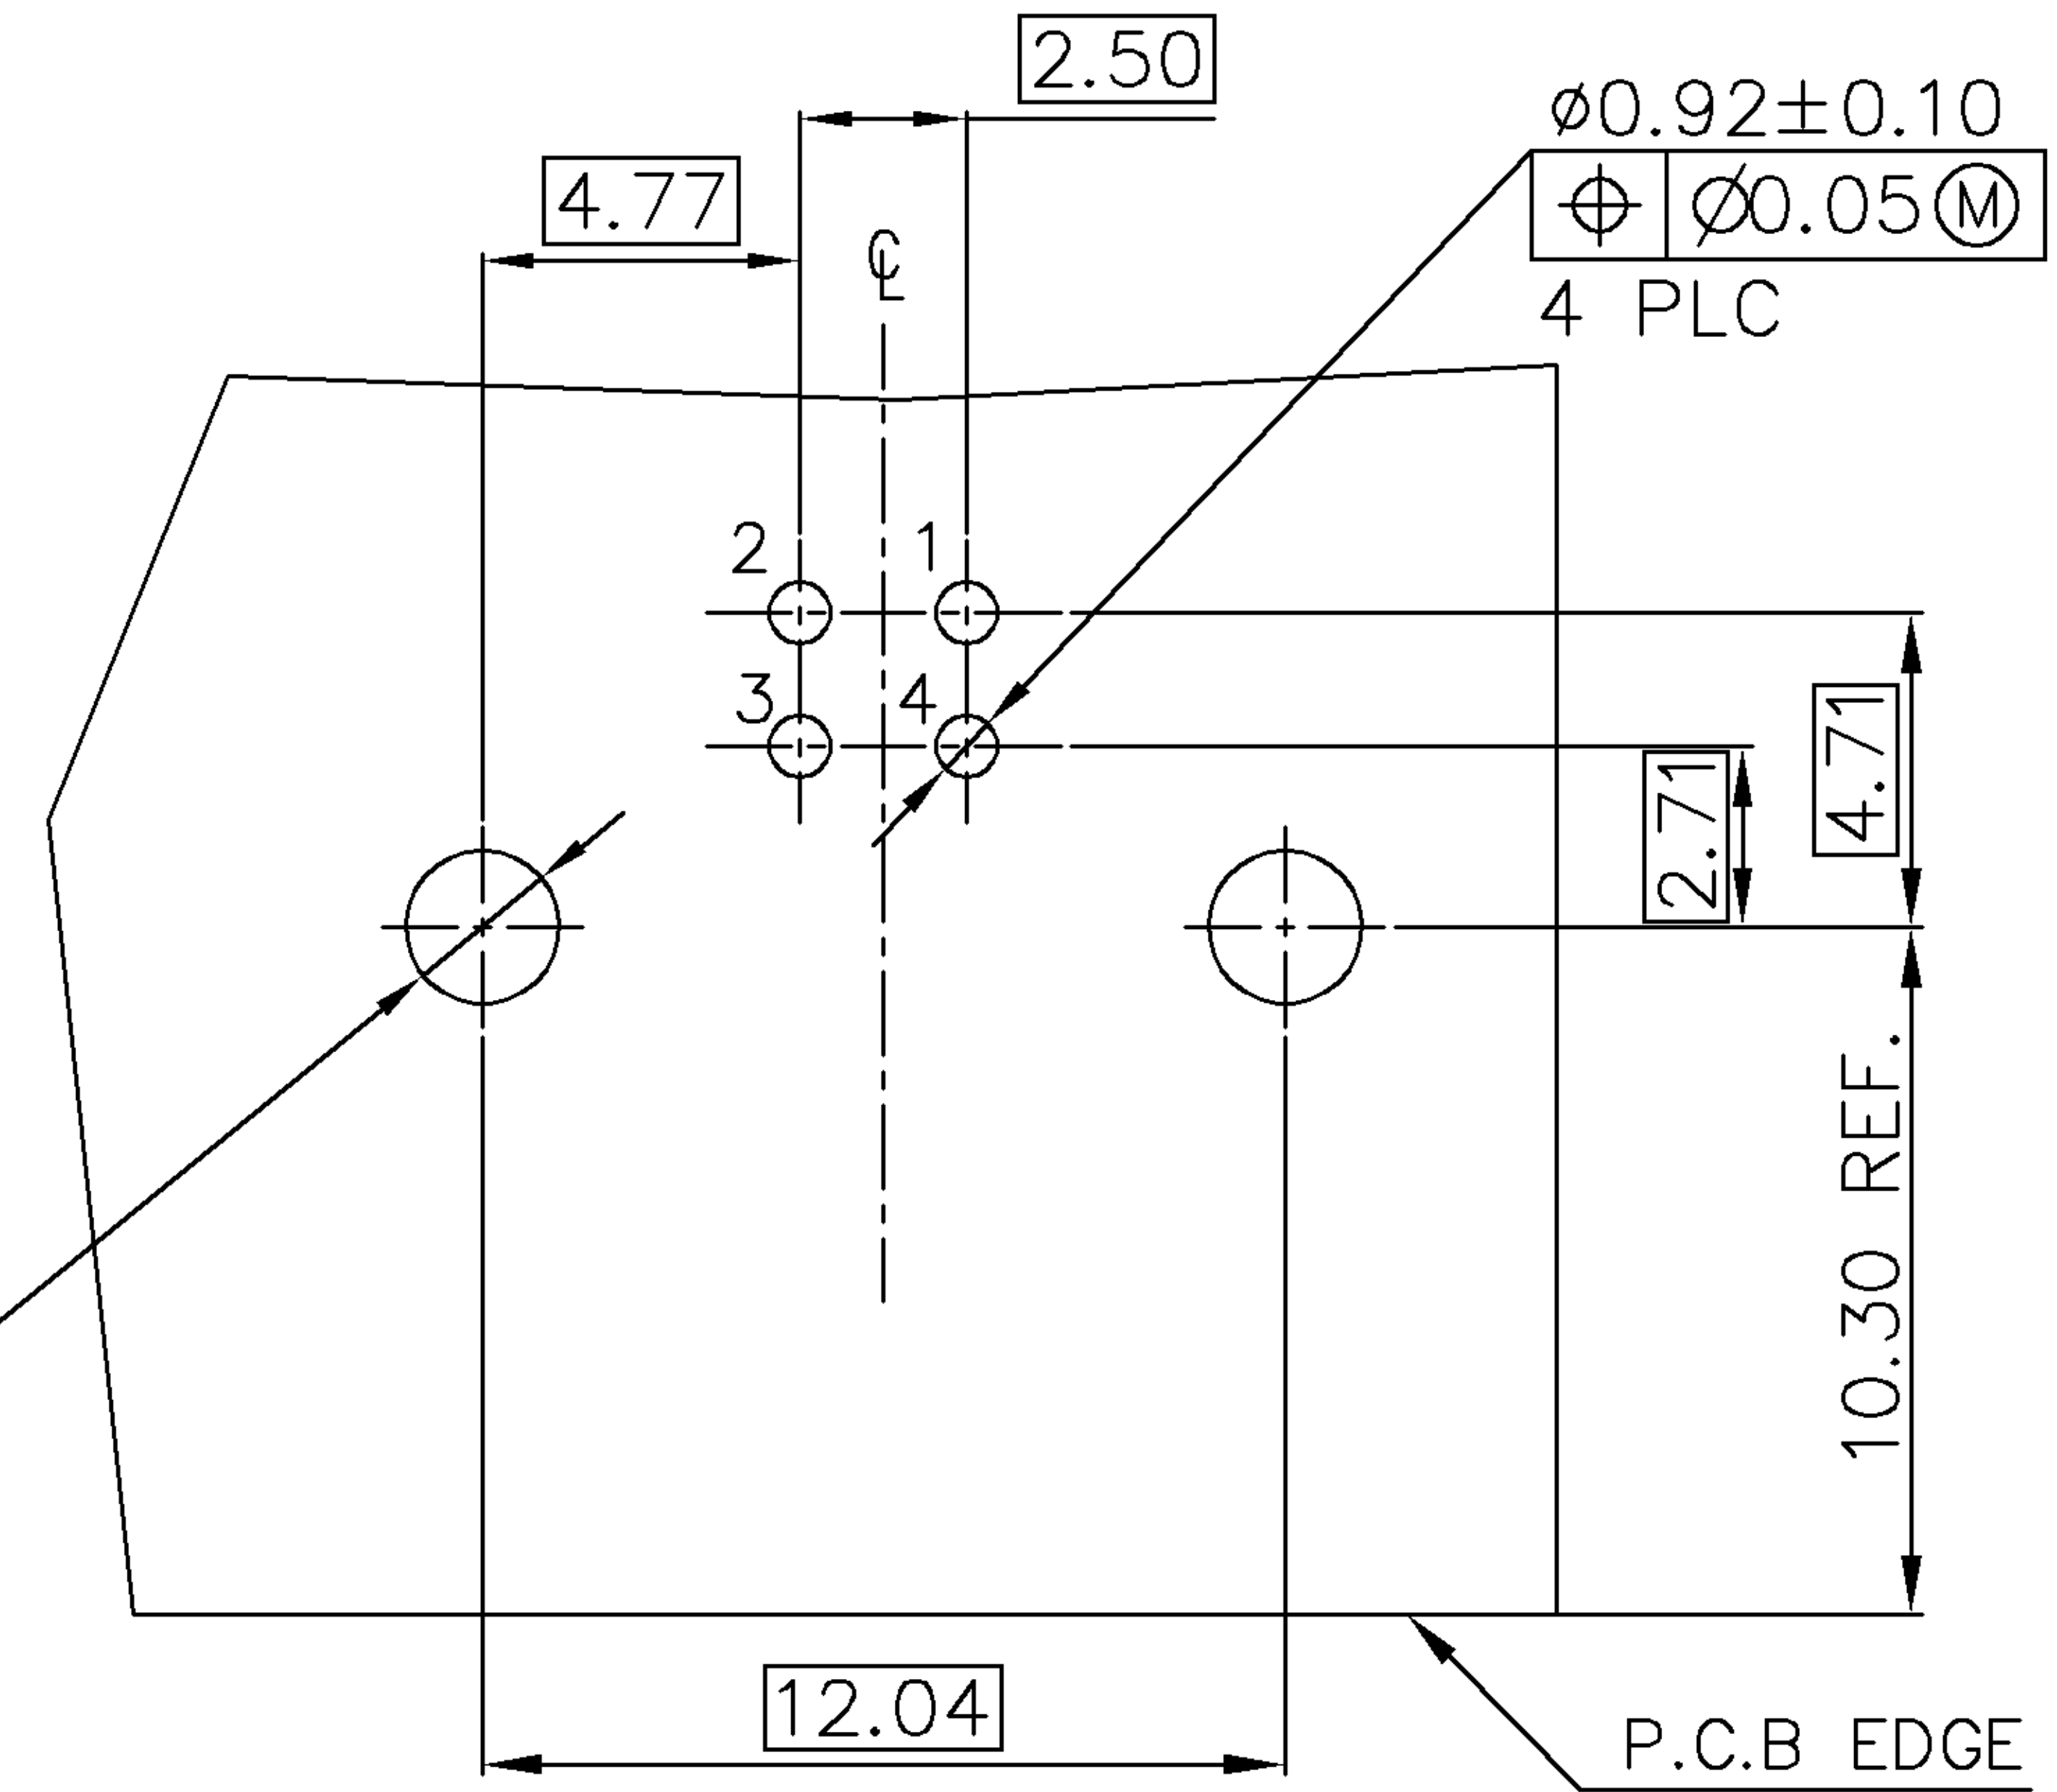

- NOTES:
- MATERIAL:
HOUSING : THERMOPLASTIC(SEE TABLE), WITH 30% GLASS FIBER FILLED.UL 94V-0 RATED. COLOR:(SEE TABLE).
CONTACT: PHOSPHOR BRONZE.(t=0.25mm).
FRONT SHIELD: BRASS.(t=0.30mm).
REAR SHIELD: SPCC.(t=0.30mm).
 - FINISH :
CONTACT: 30μ" MIN. GOLD PLATING ON CONTACT AREA.
150μ" MIN. BRIGHT TIN PLATING ON SOLDER TAILS
50μ" MIN. NICKEL UNDERPLATING OVERALL
FRONT SHIELD:120μ" MIN. NICKEL PLATING
50μ" MIN. Cu UNDER PLATING OVERALL
REAR SHIELD:120μ" MIN. NICKEL PLATING
50μ" MIN. Cu UNDER PLATING OVERALL
 - REFLOW SOLDER CAPABLE TO 260°C PER TYCO SPEC 109-201, CONDITION B.
 - WAVE SOLDER CAPABLE TO 240°C PER TYCO SPEC109-201, CONDITION A.

BLACK	PA46	1-1734086-2
WHITE	PBT	1-1734086-1
COLOR	HSG. MATERIAL	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± ANGLES ±3°	DWN O. HU 20-SEP-2005	tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH
	CHK S. HOU 20-SEP-2005	
MATERIAL SEE NOTE	APVD W.J. KE 20-SEP-2005	USB CONNECTOR, B TYPE, RIGHT ANGLE
	PRODUCT SPEC 108-57549	
FINISH SEE NOTE	QUALIFICATION TEST REPORT 501-57681	LOC DW A ₃
	WEIGHT 3.62 gram	SCALE -- SHEET 2 OF 4


SEE SHEET 1.	ECN	DWN CHK	DATE
LTR	REVISION RECORD		

CUSTOMER DRAWING



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD. DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

PRINT DIST
DW

METRIC

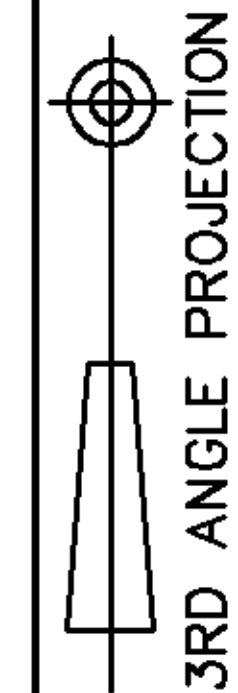


NUMBER
C-1734086

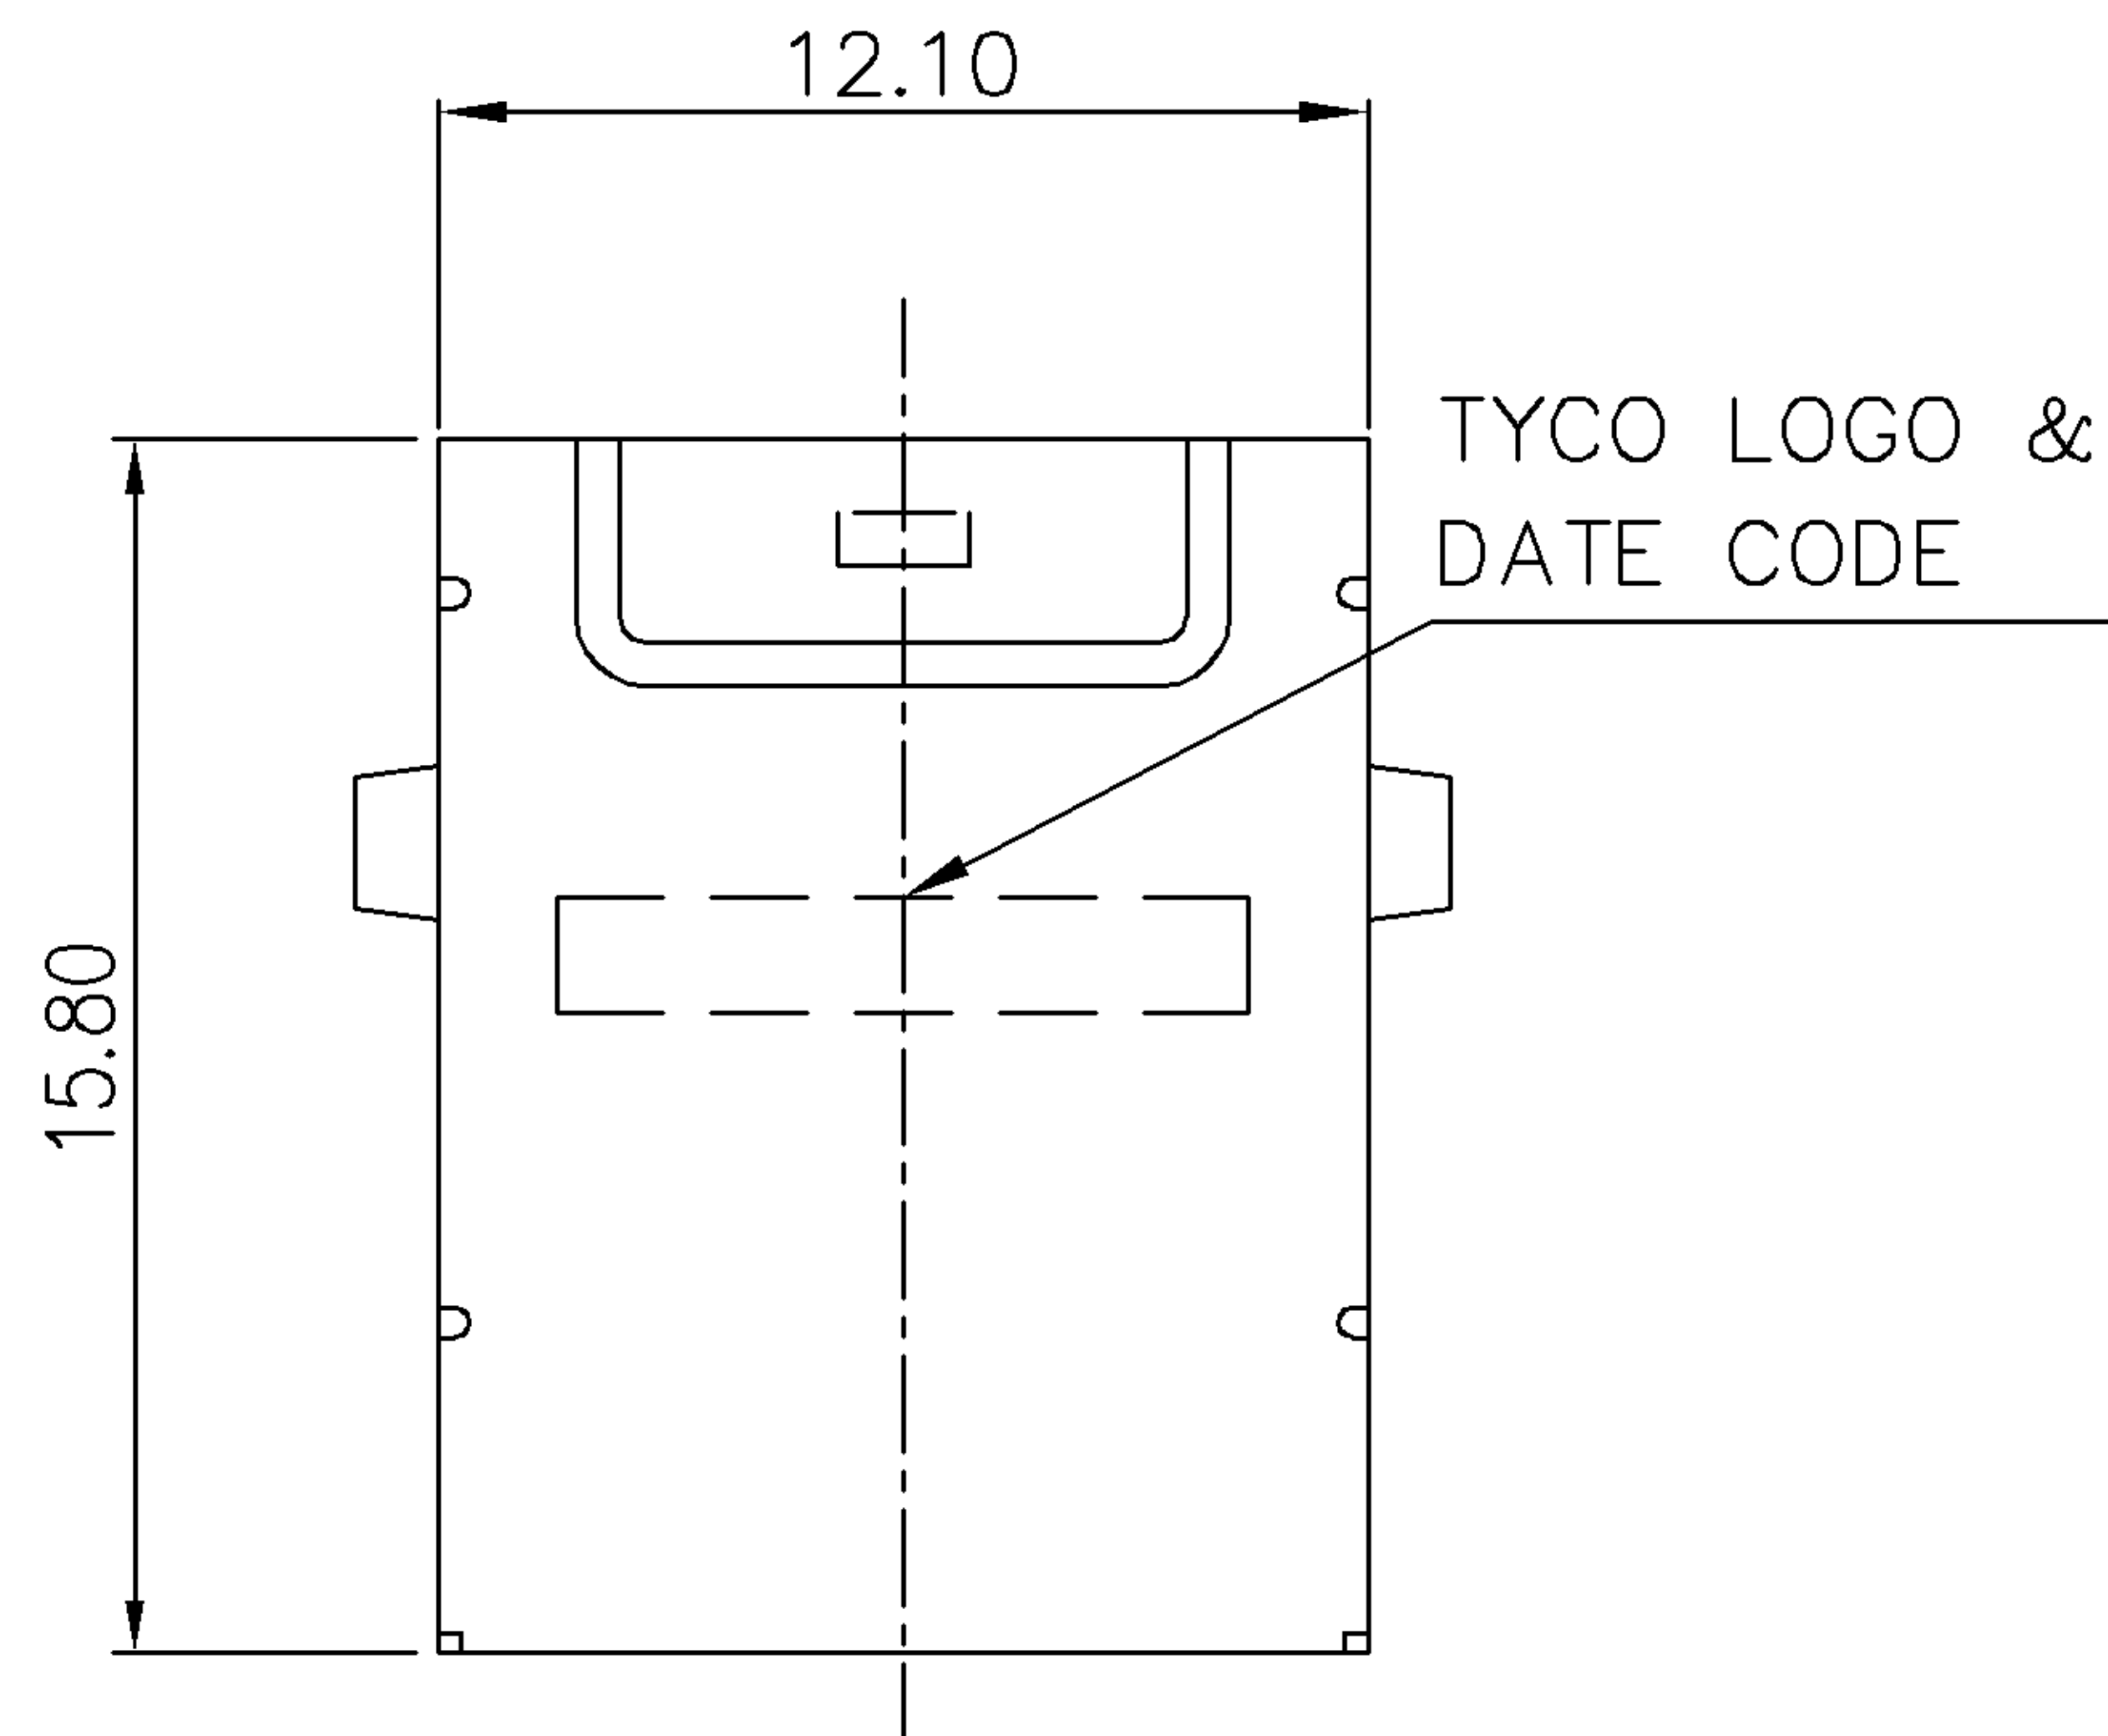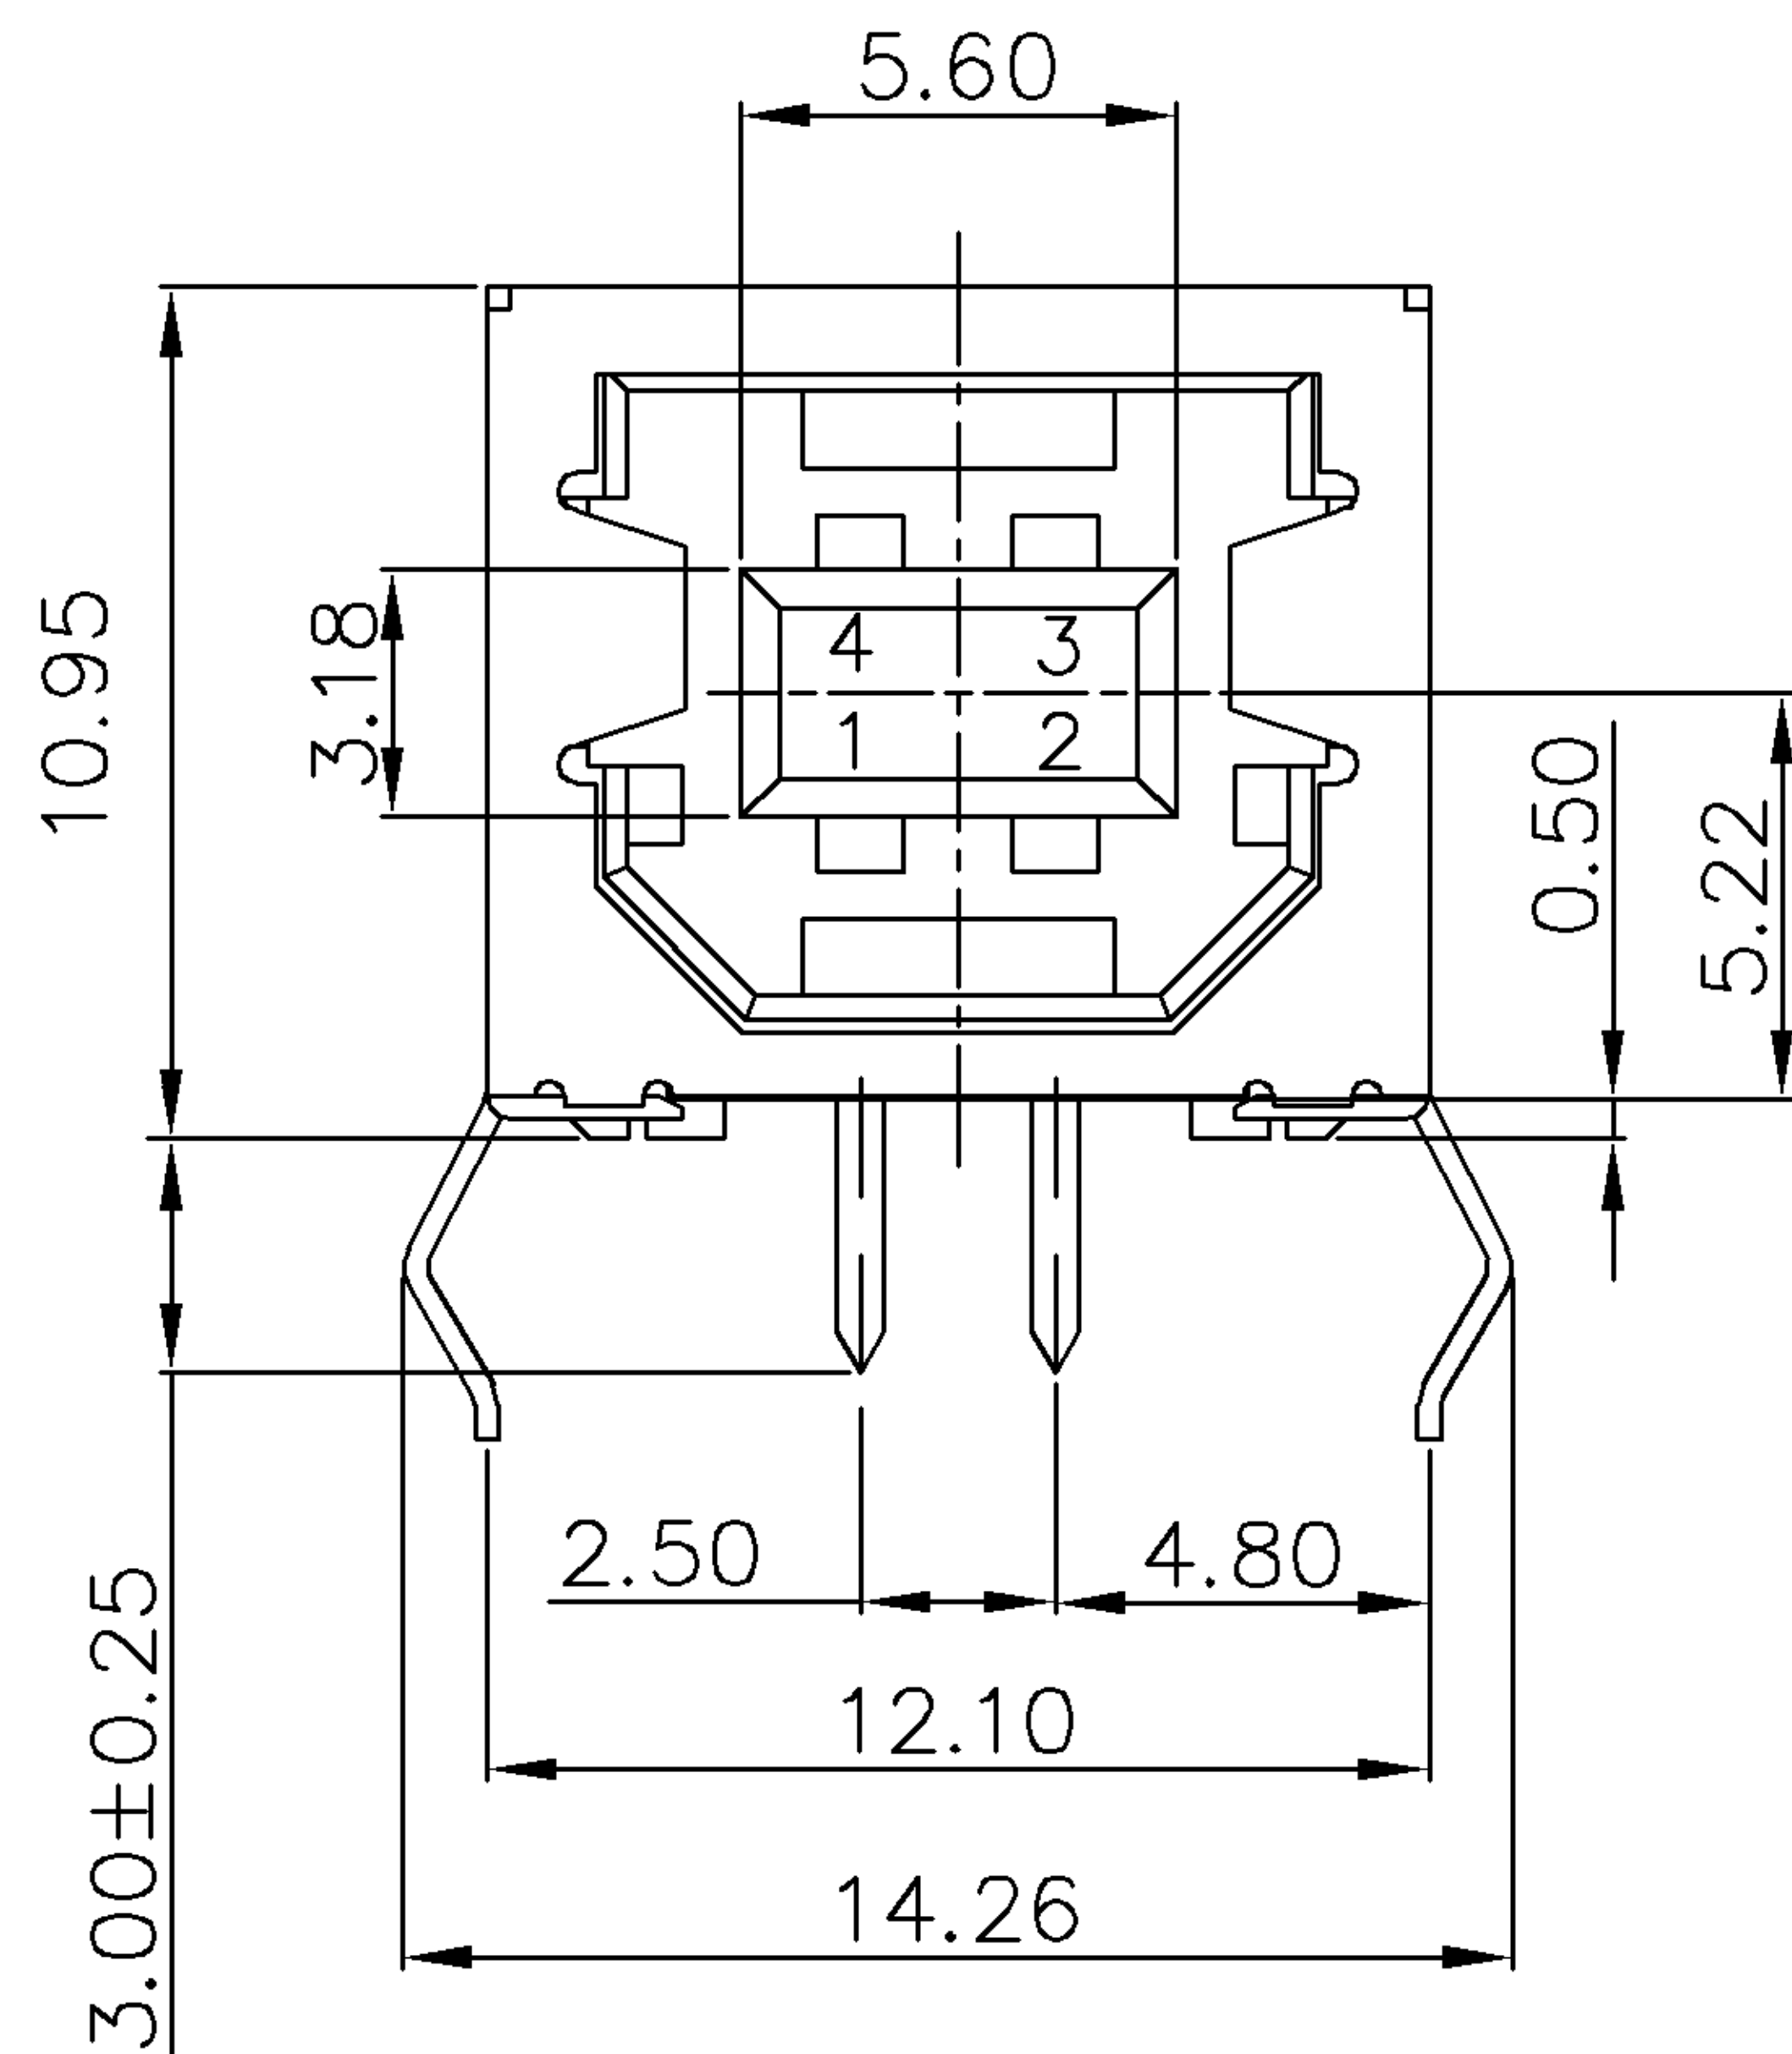


NOTES:


- MATERIAL:
HOUSING :THERMOPLASTIC(SEE TABLE), WITH 30% GLASS FIBER FILLED. UL 94V-0 RATED. COLOR:(SEE TABLE).
CONTACT:PHOSPHOR BRONZE, (t=0.25mm).
SHIELD: BRASS OR PHOSPHOR BRONZE (t=0.30mm).
- FINISH :
CONTACT: 30μ" MIN. GOLD PLATING ON CONTACT AREA.
150μ" MIN. BRIGHT TIN PLATING ON SOLDERTAILS
50μ" MIN. NICKEL UNDERPLATING OVERALL
REAR SHIELD:120μ" MIN. NICKEL PLATING
50μ" MIN. Cu UNDER PLATING OVERALL
- REFLOW SOLDER CAPABLE TO 260°C PER TYCO SPEC 109-201, CONDITION B.
- WAVE SOLDER CAPABLE TO 240°C PER TYCO SPEC109-201, CONDITION A.

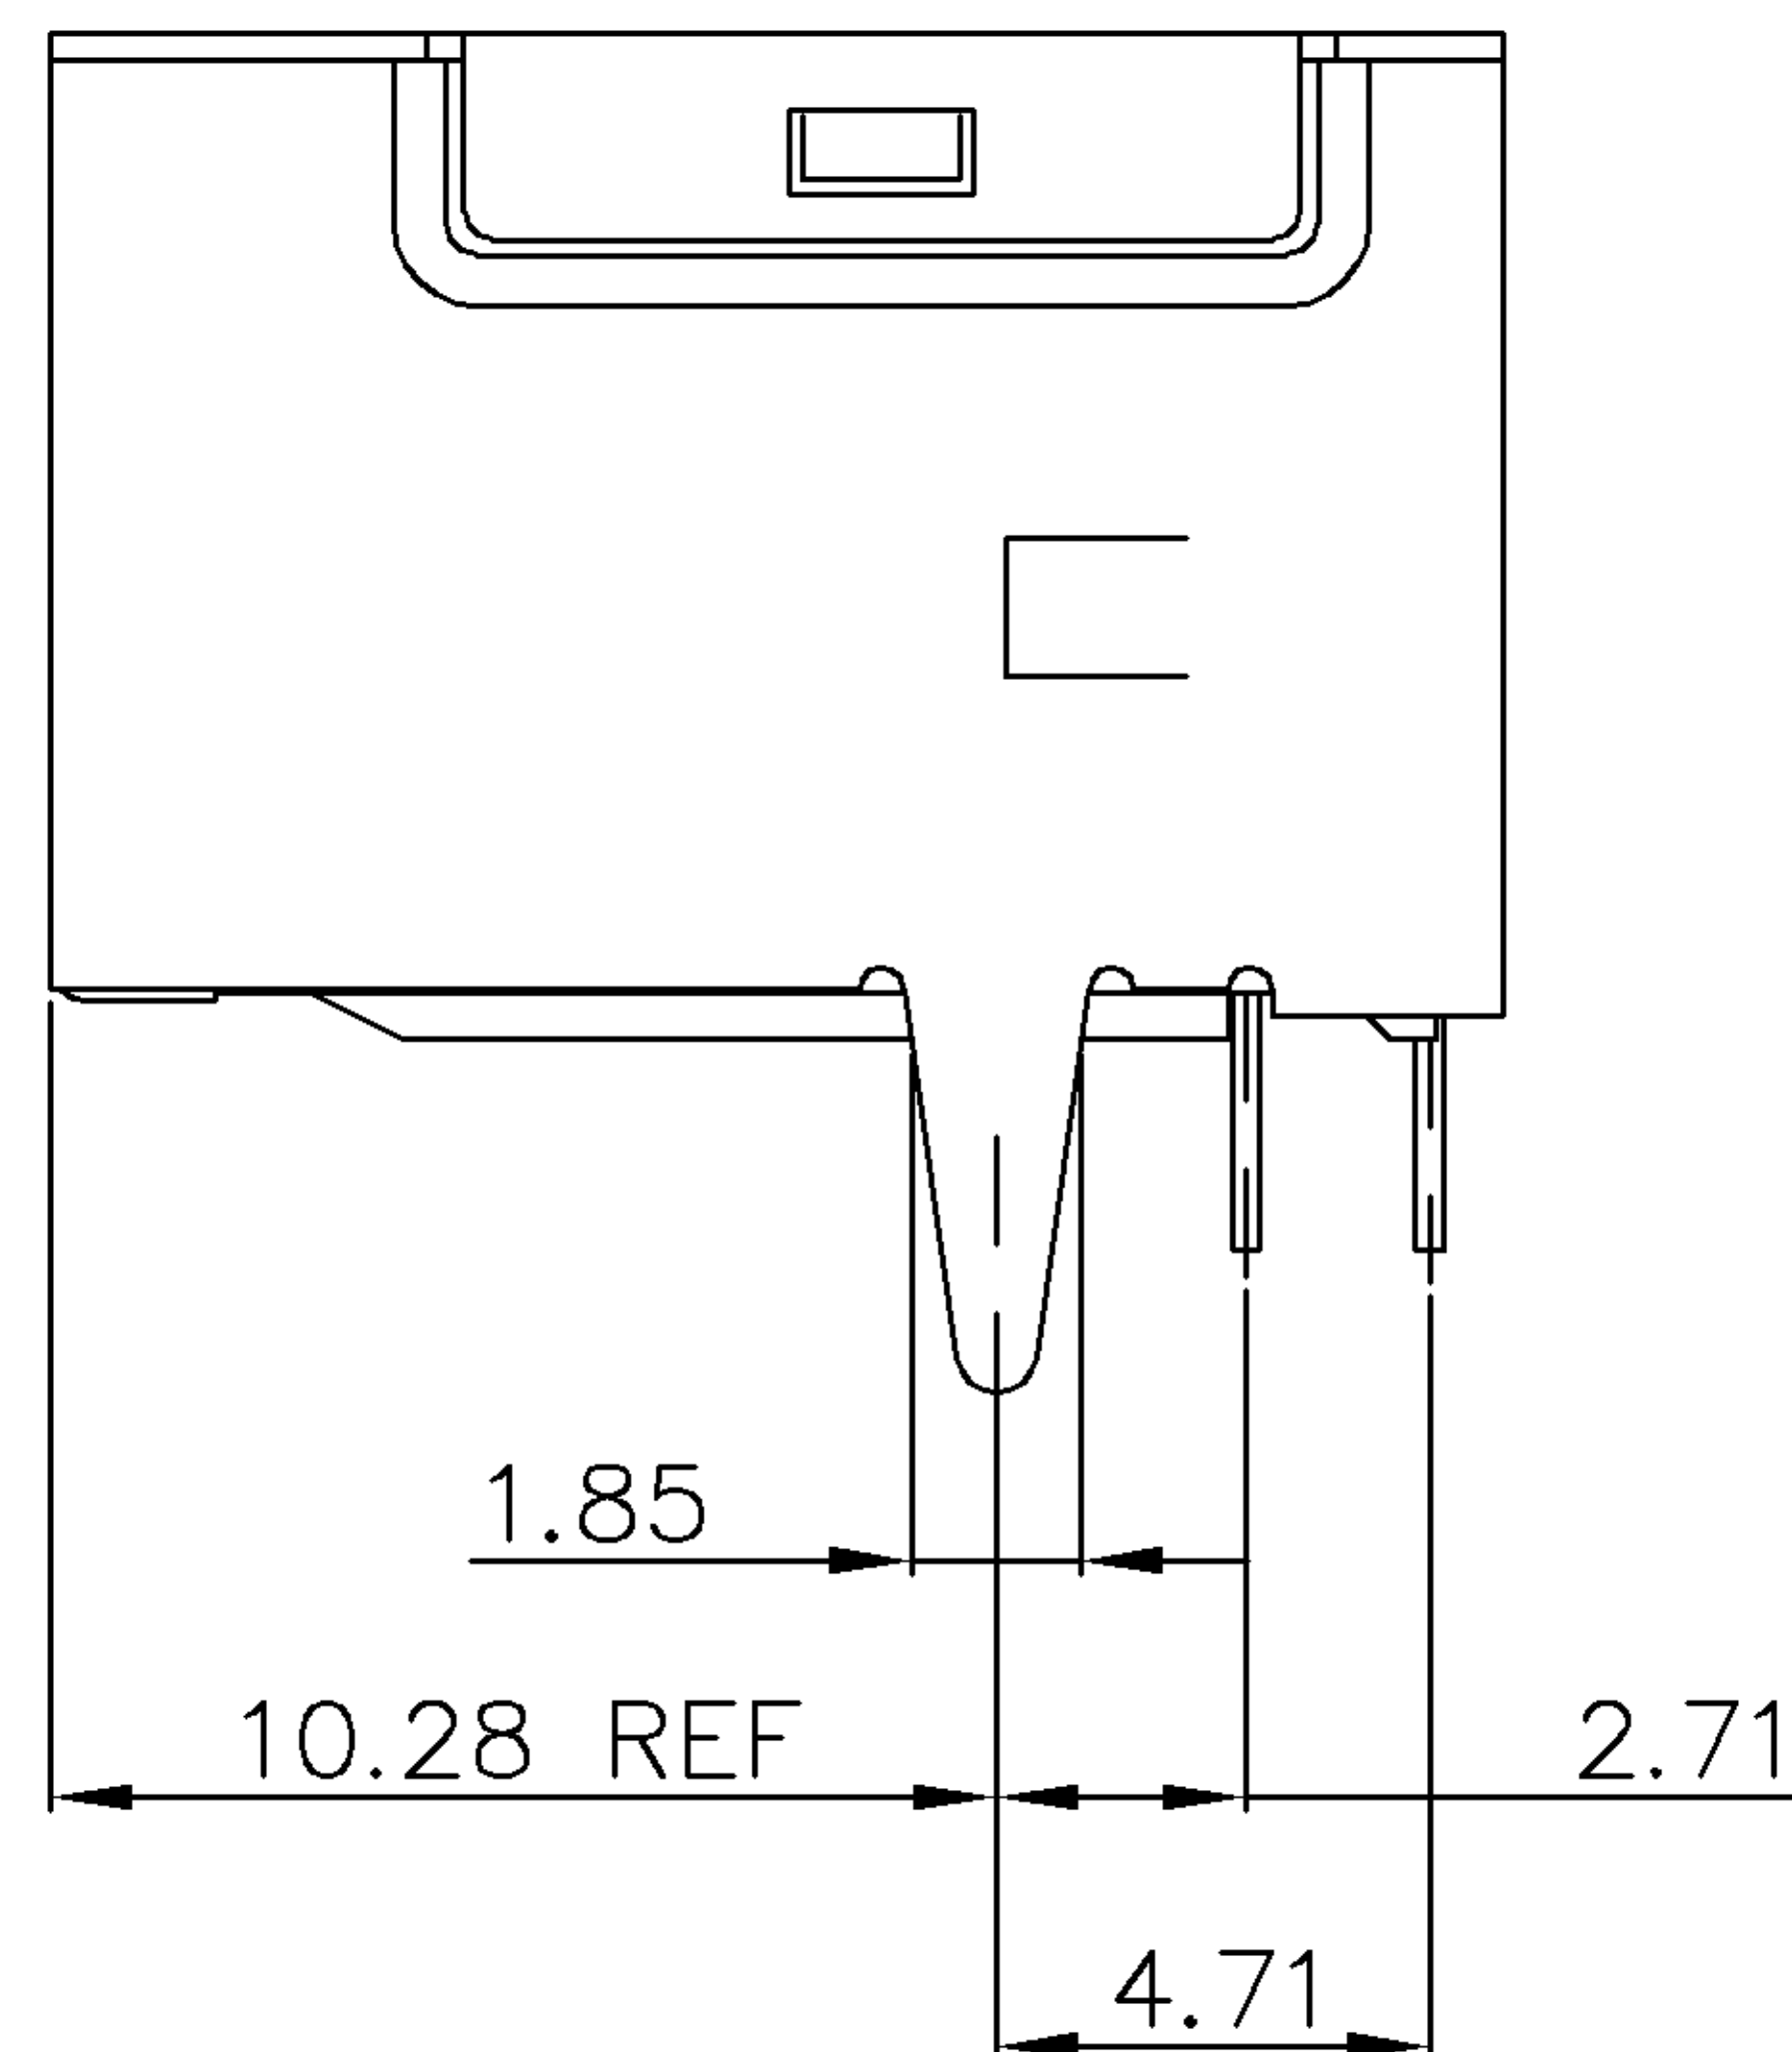

ø2.30±0.10
⊕ ⊖ 0.05 (M)
2 PLC

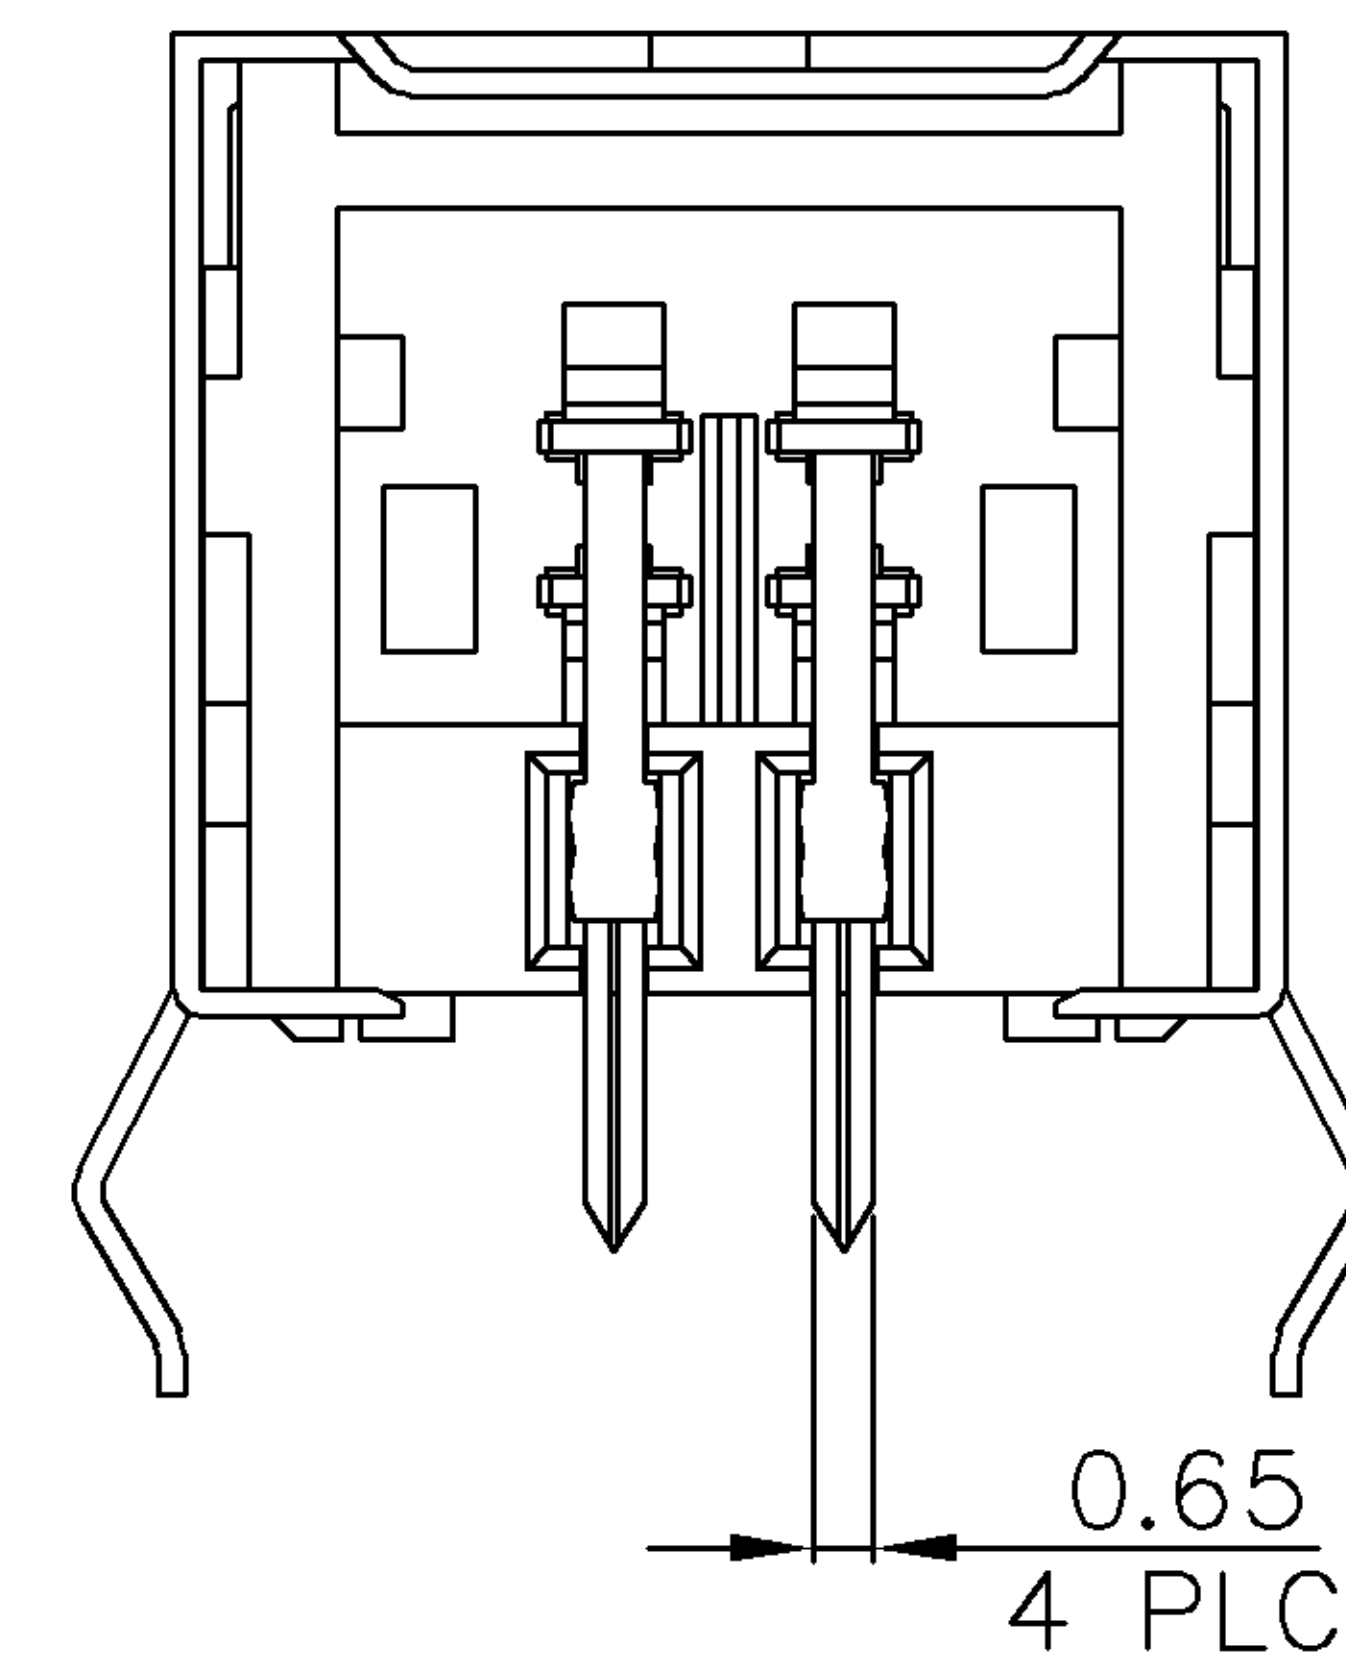

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(TOP VIEW) TOLERANCE±0.05

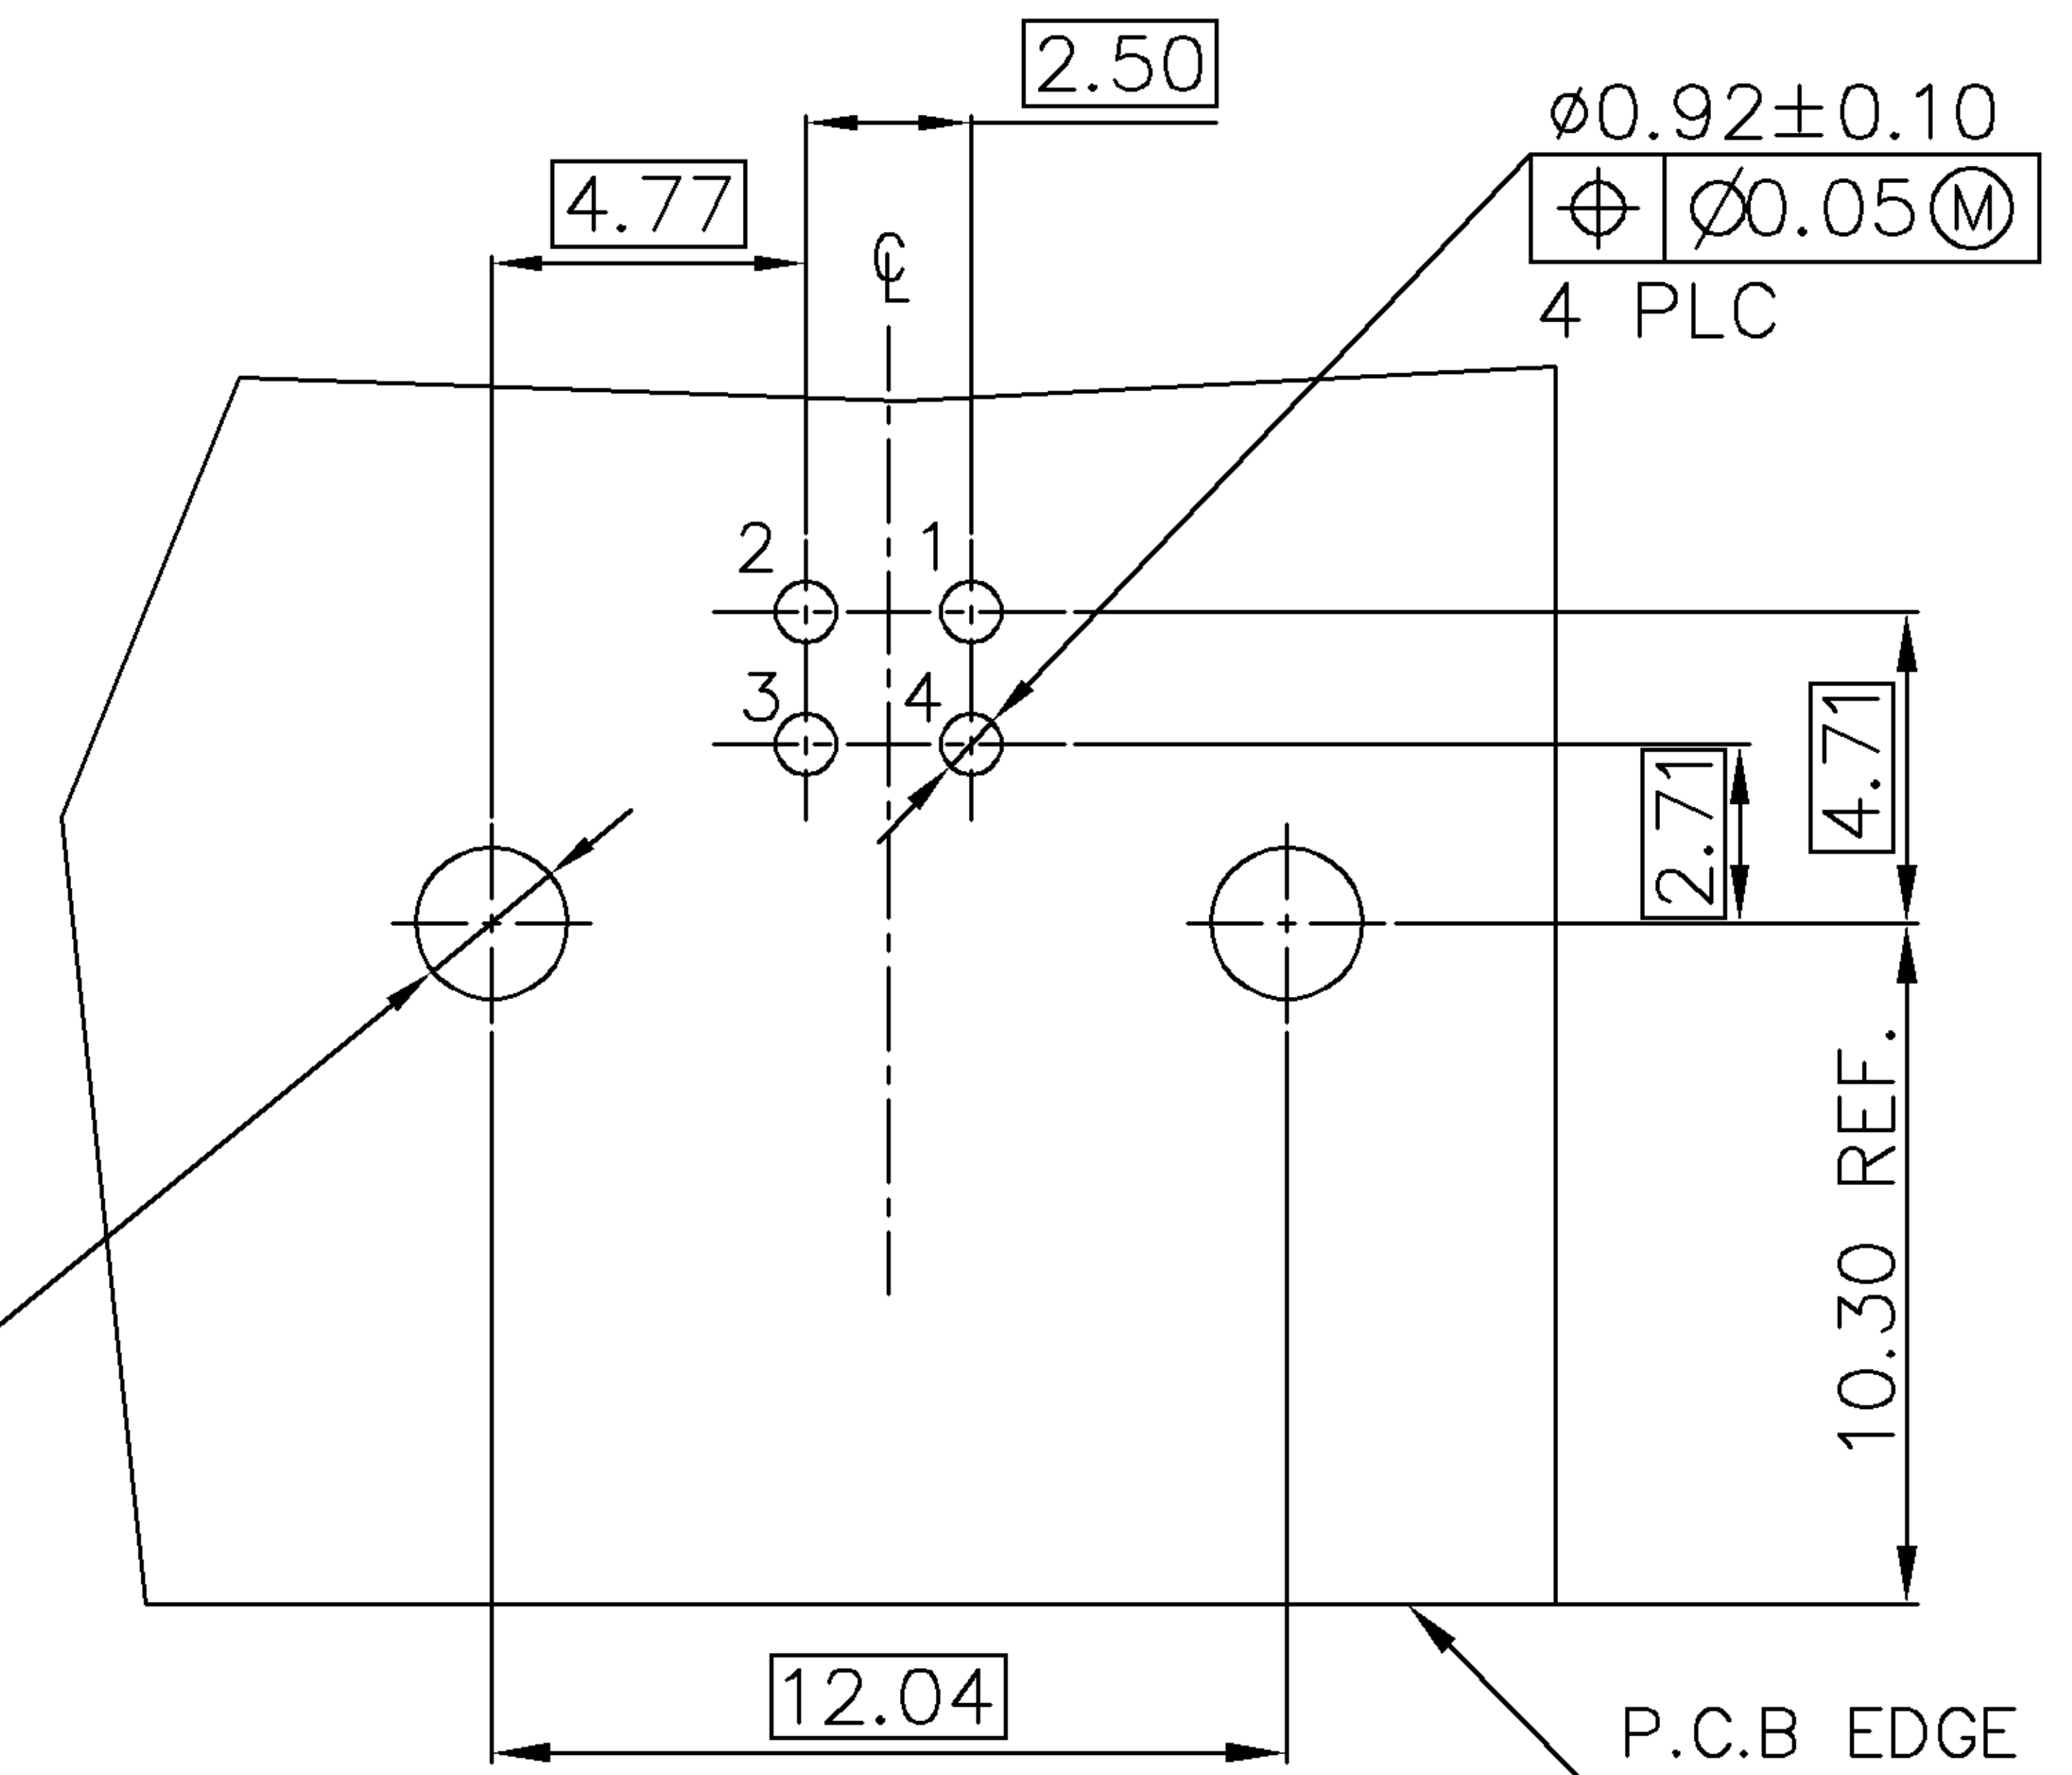


BLACK	PA46	2-1734086-2
WHITE	PBT	2-1734086-1
COLOR	HSG. MATERIAL	PART NUMBER


TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± ANGLES ±3°	DWN O. HU 20-SEP-2005	tyco TYCO HOLDINGS (BERMUDA) Electronics VII LTD. TAIWAN BRANCH		
	CHK S. HOU 20-SEP-2005			
MATERIAL SEE NOTE	APVD W.J. KE 20-SEP-2005	USB CONNECTOR, B TYPE, RIGHT ANGLE		
	PRODUCT SPEC 108-57549			
FINISH SEE NOTE	QUALIFICATION TEST REPORT 501-57681	LOC DW	SIZE A₃	DRAWING NO C-1734086
	WEIGHT 3.62 gram	SCALE --	SHEET 3 OF 4	

SEE SHEET 1.	ECN	DWN CHK	DATE
LTR	REVISION RECORD		

CUSTOMER DRAWING

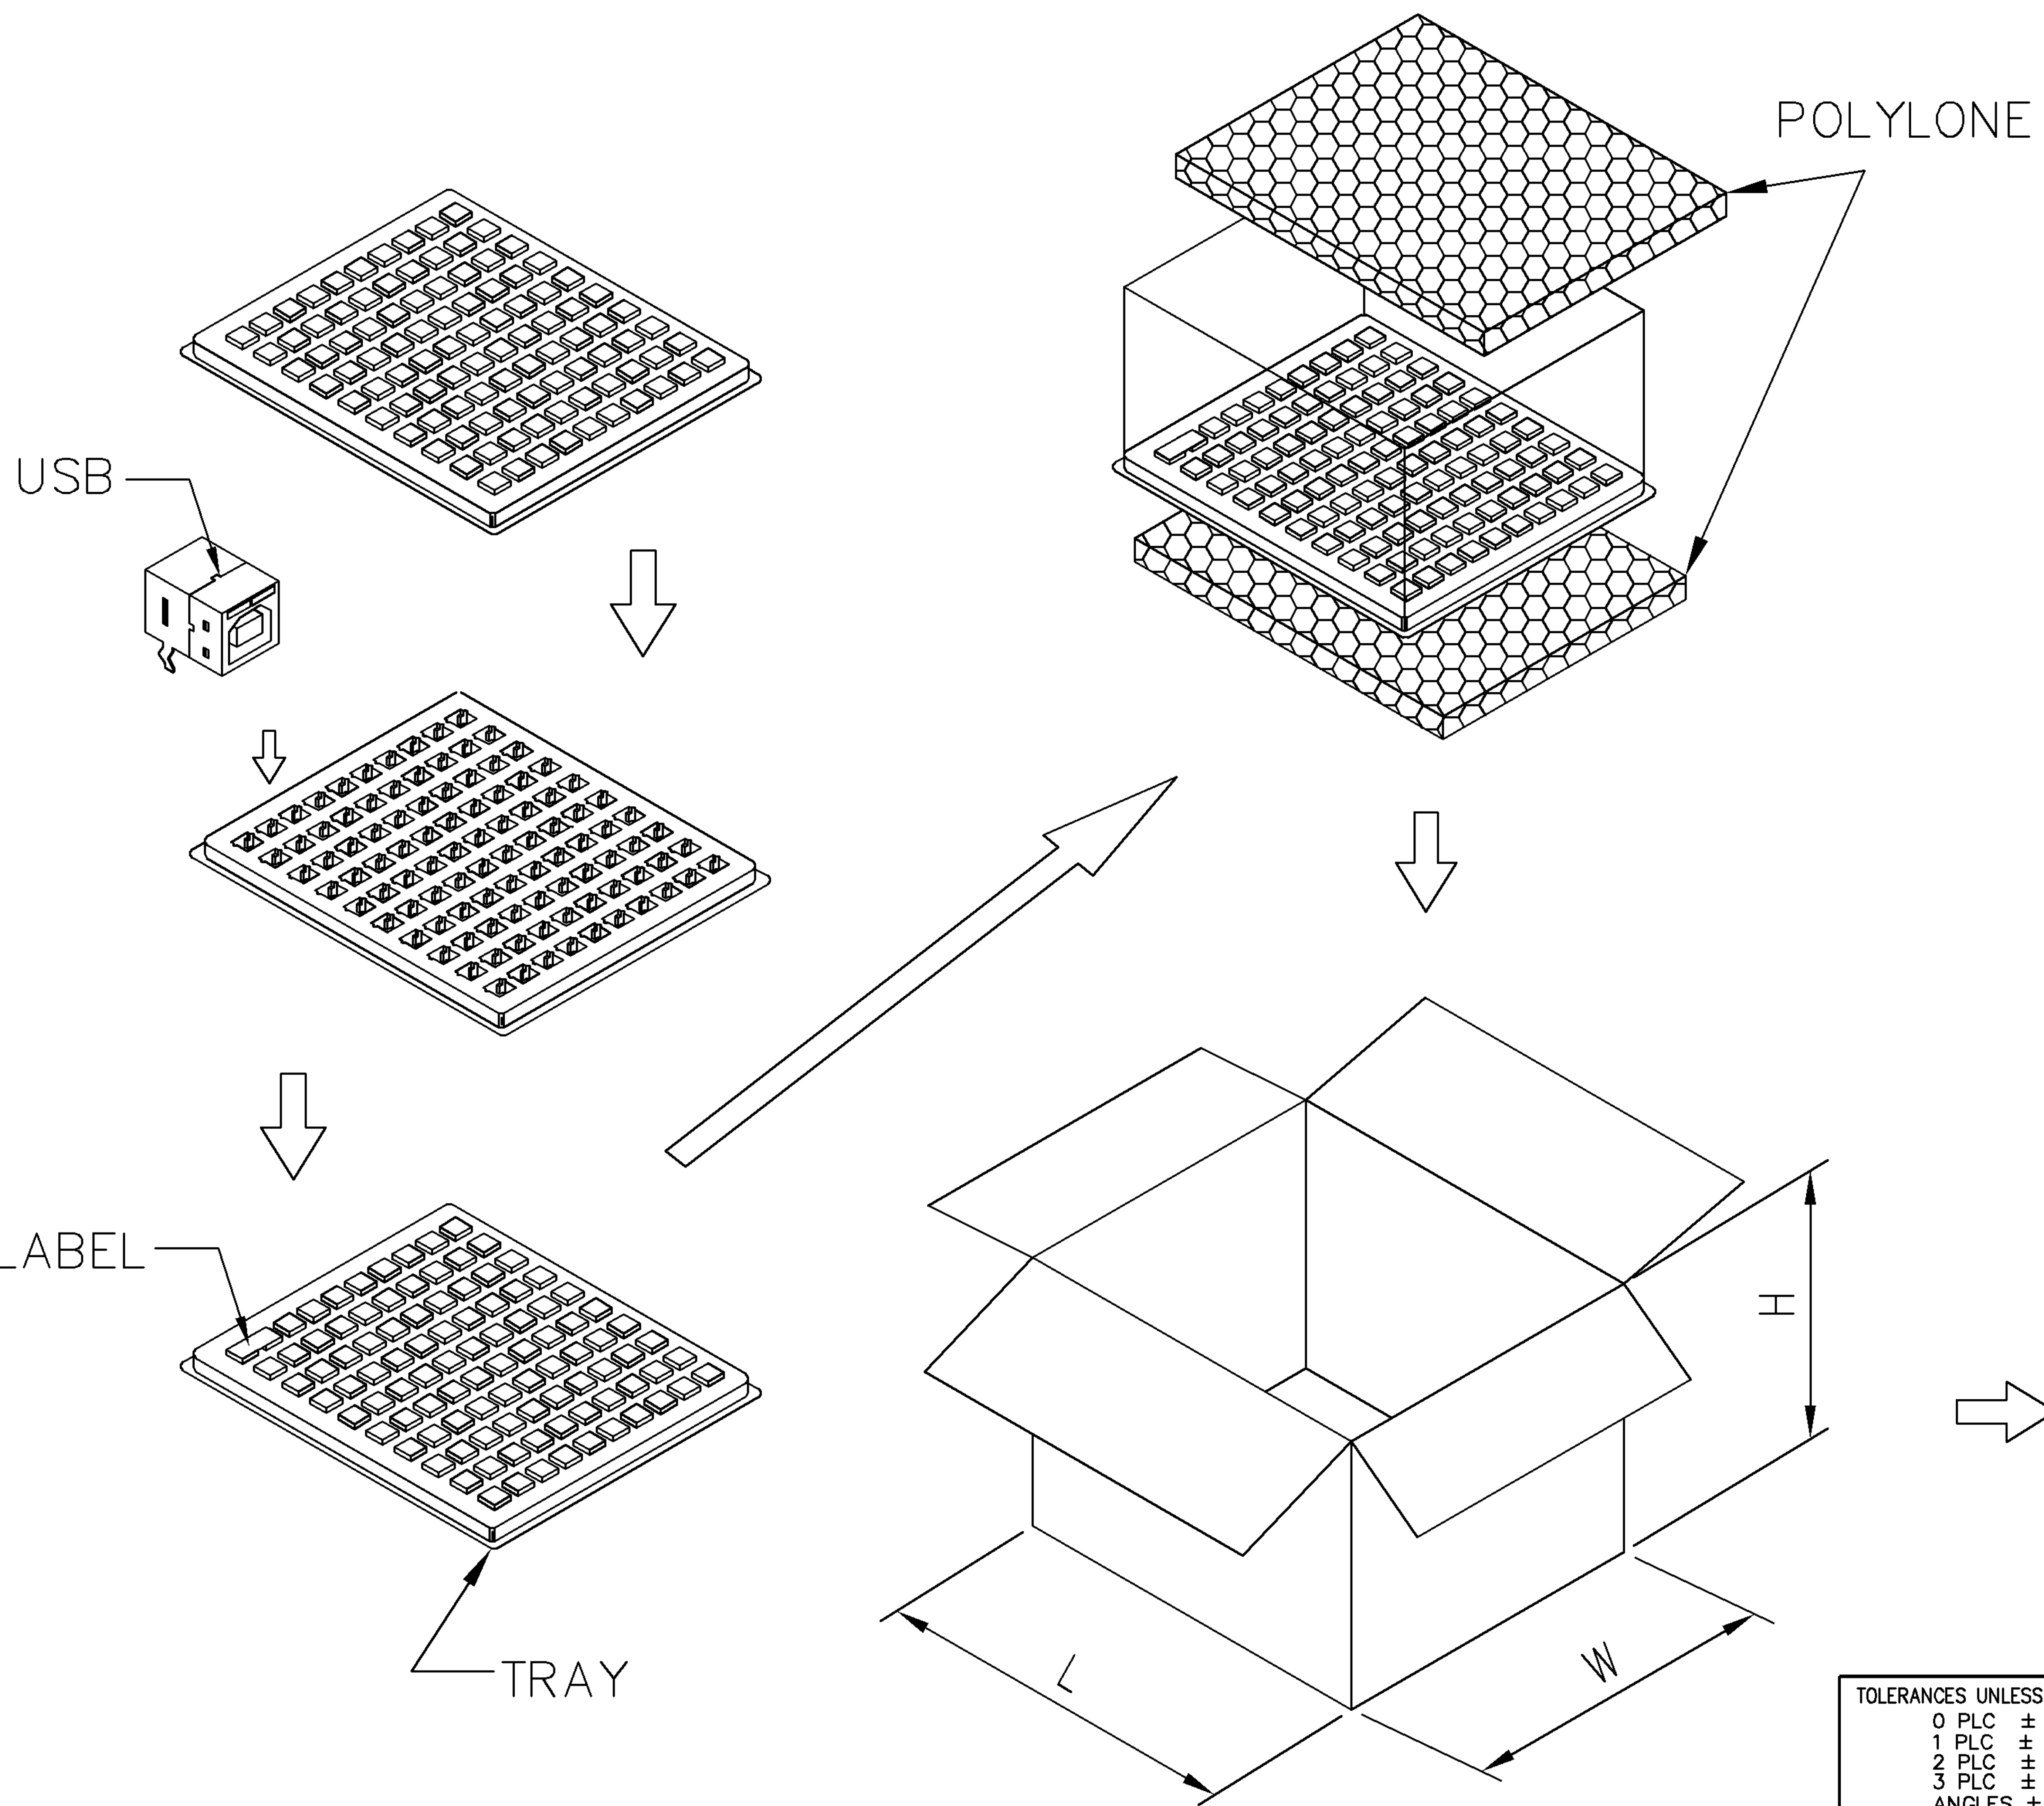

- NOTES:
1. MATERIAL:
TRAY: PE.
POLYLONE: POLYLONE
SHIPPING CARTON: CORRUGATED FIBER.
 2. DIMENSION :
TRAY: 308mm(L)X 226mm(W)X 23mm(H)
POLYLONE: 305mm(L)X 238mm(W)X 10mm(H)
SHIPPING CARTON: 503mm(L)X 338mm(W)X 258mm(H)
 3. QUANTITY :
PRIMARY PACKING: 100 PCS/TRAY
SECONARY PACKING: 10 TRAYS/CARTON(1,000PCS).
 4. WEIGHT :
NET WEIGHT : 3.62 KG
GROSS WEIGHT : 5.08 KG

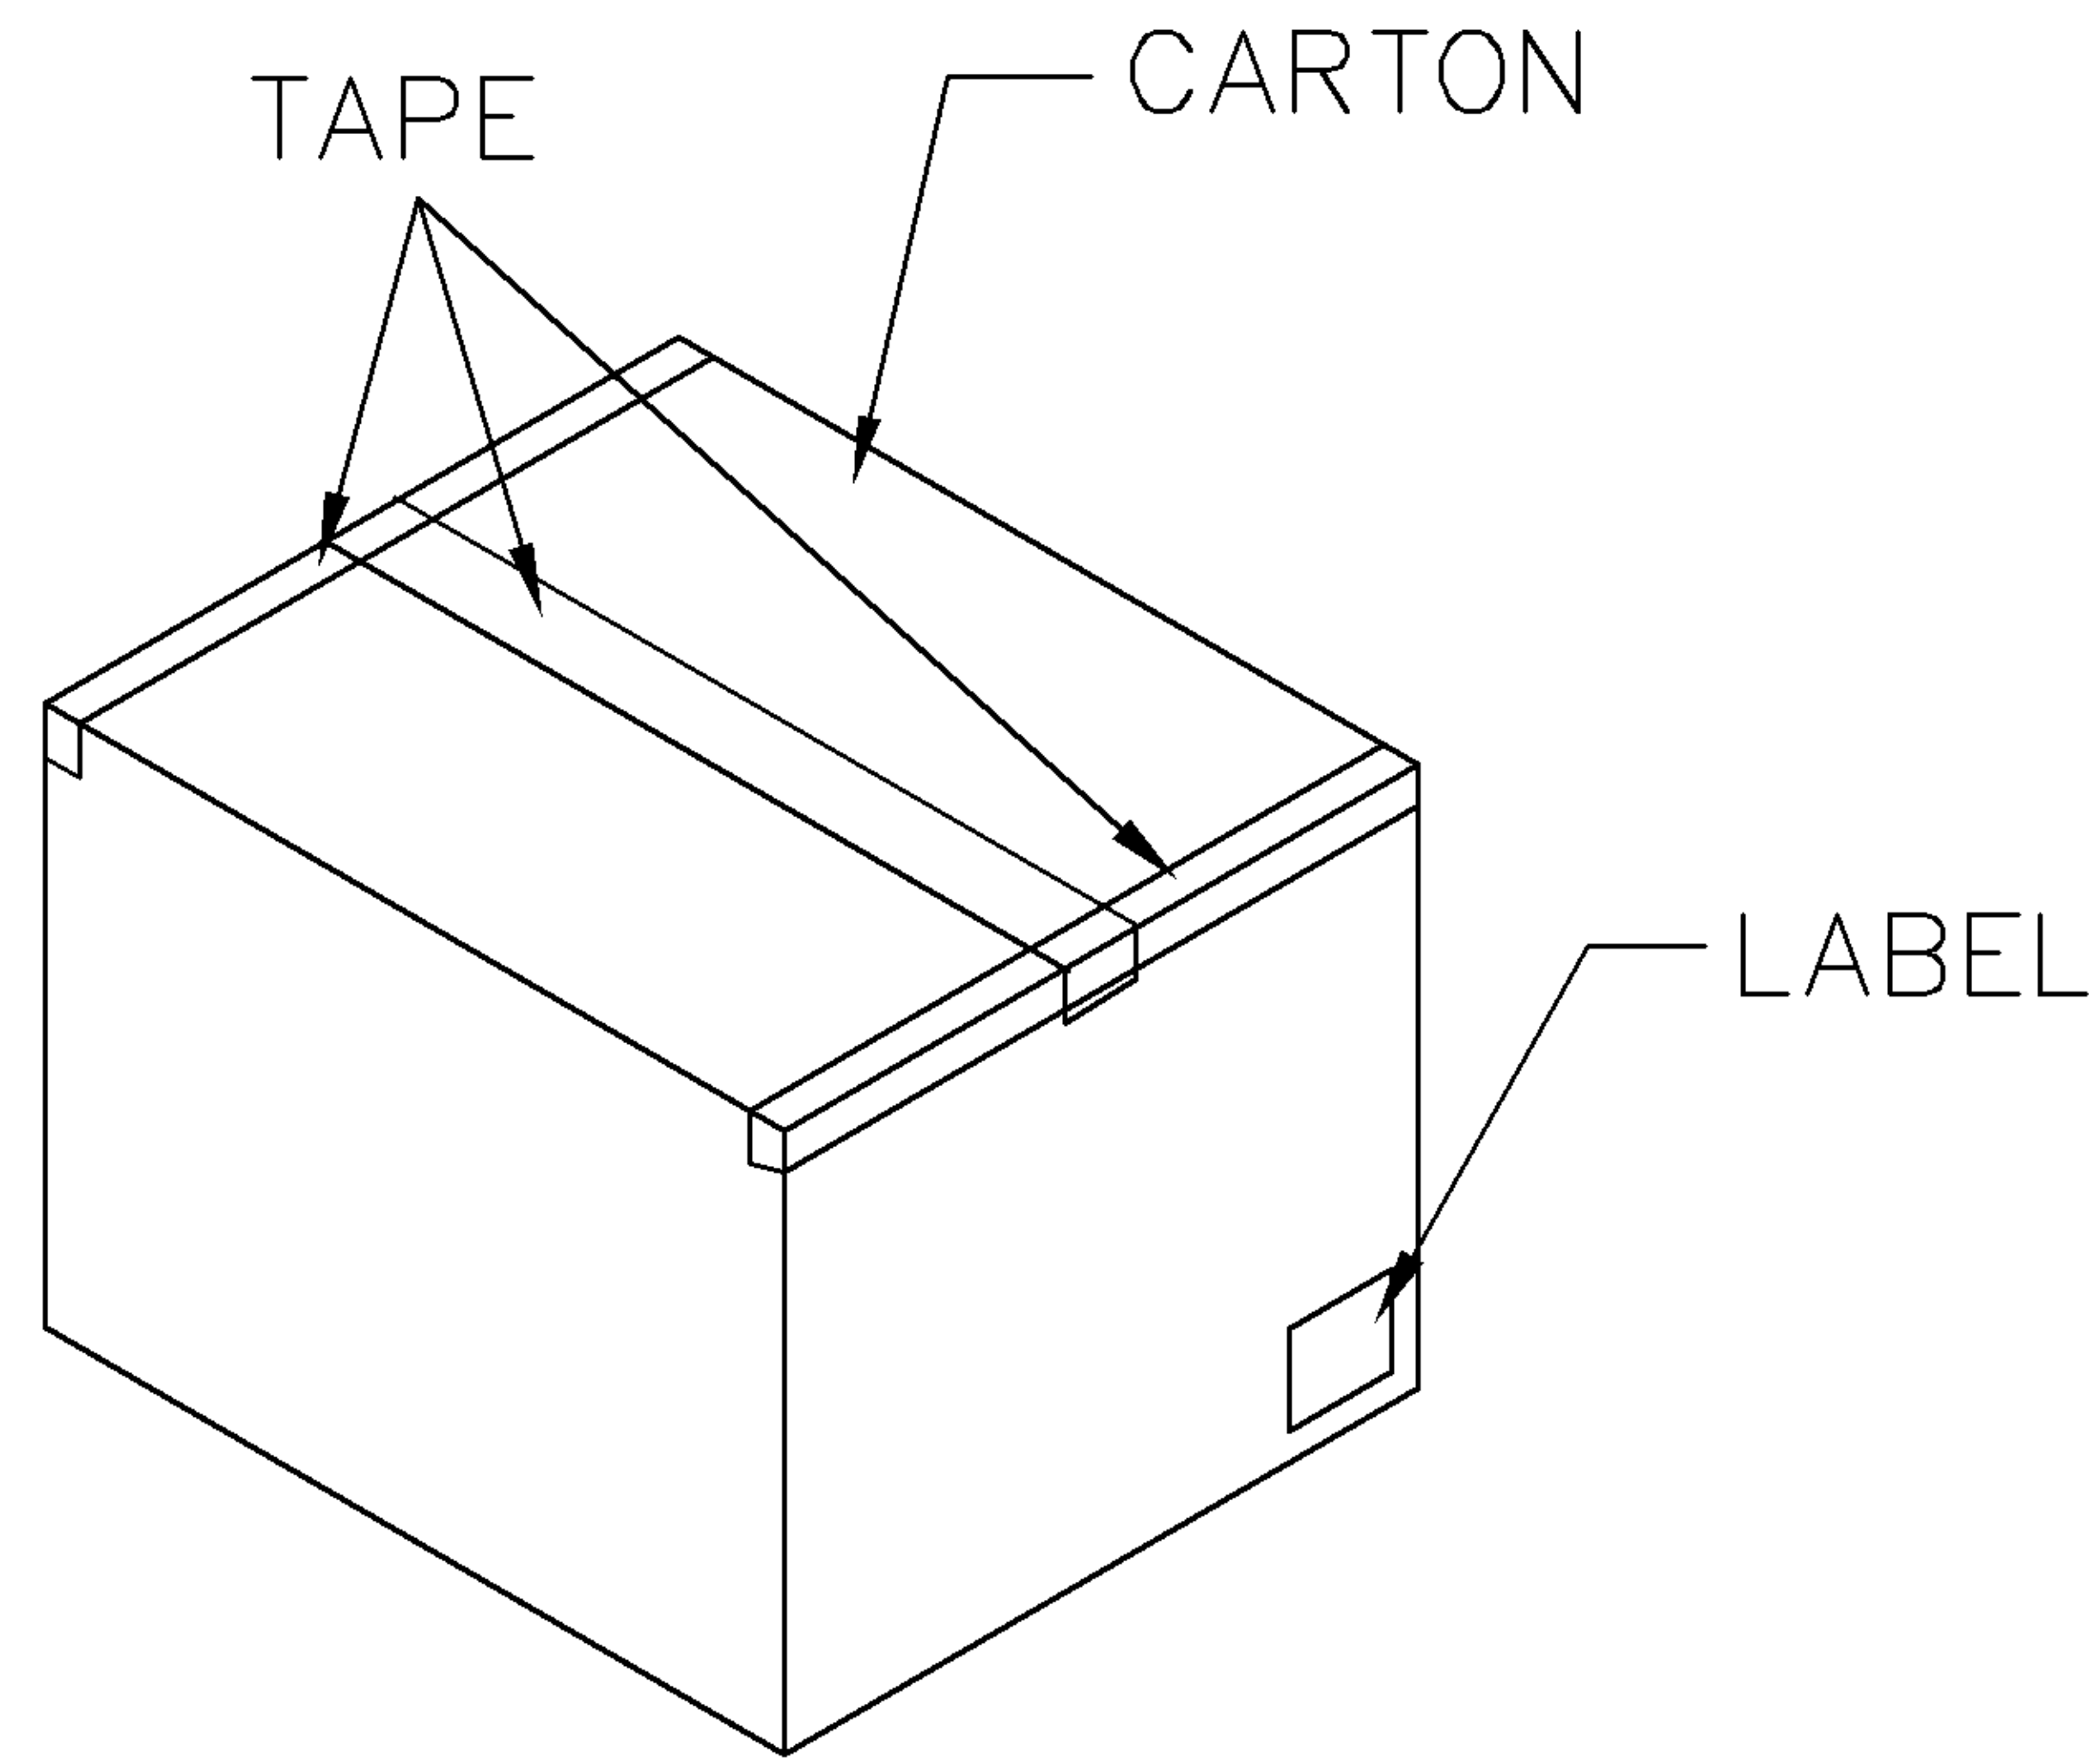

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		O. HU		tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH					
0 PLC ±		20-SEP-2005		S. HOU							
1 PLC ±		20-SEP-2005		NAME							
2 PLC ±		20-SEP-2005		USB CONNECTOR, B TYPE, RIGHT ANGLE							
3 PLC ±		20-SEP-2005									
ANGLES ±		20-SEP-2005									
MATERIAL		APVD		W.J. KE							
SEE NOTE		PRODUCT SPEC		20-SEP-2005							
		--									
FINISH		QUALIFICATION TEST REPORT		LOC		SIZE		DRAWING NO		REV	
SEE NOTE		--		DW		A ₃		C-1734086		O	
		WEIGHT		SCALE		SHEET					
		--				--		4 OF 4			

SEE SHEET 1.		ECN		DWN		CHK		DATE	
LTR	REVISION RECORD	ECN	DWN	CHK	DATE	LTR	REVISION RECORD	ECN	DWN