


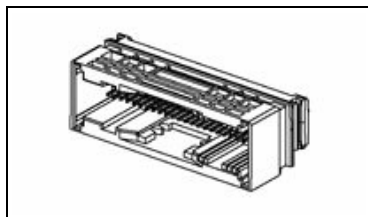

## 5-1743336-1 Product Details

**5-1743336-1**

TE Internal Number: 5-1743336-1

Active

### Micro-Power & Power Quadlok System

Always ELV Compliant (Statement of Compliance)

**Product Highlights:**

- Applies To Printed Circuit Board
- Connector
- Connector Assembly
- Connector Style = Header
- 75 Positions

[View all Features](#)**Quick Links**

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

**Product Drawings:**

- [AIR BAG 75P HEADER ASSEMBLY \(FA-II\)](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:**

- None Available

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

Feedback

### Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- Sealed = No
- Mount Angle = Right Angle
- Post Type = 0.64 [.025] Square
- Keyed = Yes

**Termination Features:**

- Termination Method to PC Board = Through Hole - Solder

**Contact Features:**

- Contact Type = Tab
- Contact Style = Right-Angle
- [Tab Contacts](#) = Without
- 2.5mm Pin Diameter Contacts = Without
- [Contact Finish](#) = Selective Gold
- Contact Shape = Square
- Contact Base Material = Phosphor Bronze

**Housing Features:**

- Connector Style = Header
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 5.5 [.100 x .216]
- Header Color = Reseda Green
- Housing Material = PBT - GF

**Configuration Features:**

- [Number of Positions](#) = 75
- Fiber Optic Contacts = Without
- Staggered Centerline = Without

**Industry Standards:**

- [RoHS/ELV Compliance](#) = ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was ELV compliant

**Identification Marking:**

- Key ID = A-G

**Conditions for Usage:**

- Applies To = Printed Circuit Board

**Other:**

- Brand = TE Connectivity

[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

